

Aluminum alloy Cabinet

LED Outdoor Display

CHARMING CO.LTD

WWW.CHARMINGLED.NET

-SINCE 2003-

I L L U M I N A T E Y O U R W O R L D



LED OUTDOOR DISPLAY (Aluminum alloy Cabinet)

P4/P5/P6.66/P8/P10

ILLUMINATE YOUR WORLD

Stainless steel
handle

plating and
thickening lock

Stainless steel
screws



waterproof lock

waterproof cover

Stainless steel
hinge

Fast installation

Have 2 pcs fast lockers on top and left sides





Ultrathin, only **12.8** mm thickness



Ultralight, Only **28.8** kgs weight





RGB



C E



Low heating-up



High definition
display



Seamless



Easy maintenance




OUTDOOR USE

IP65




Low power

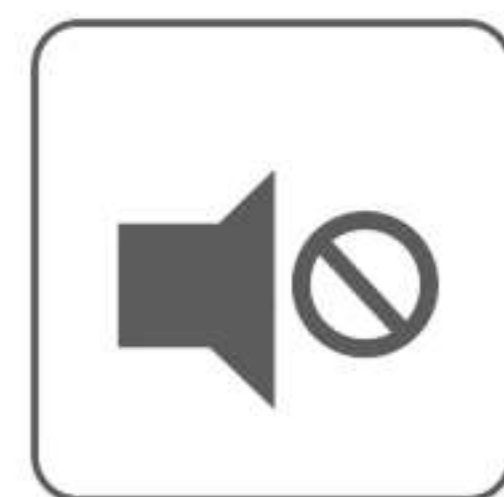


Ultra low noise
operation



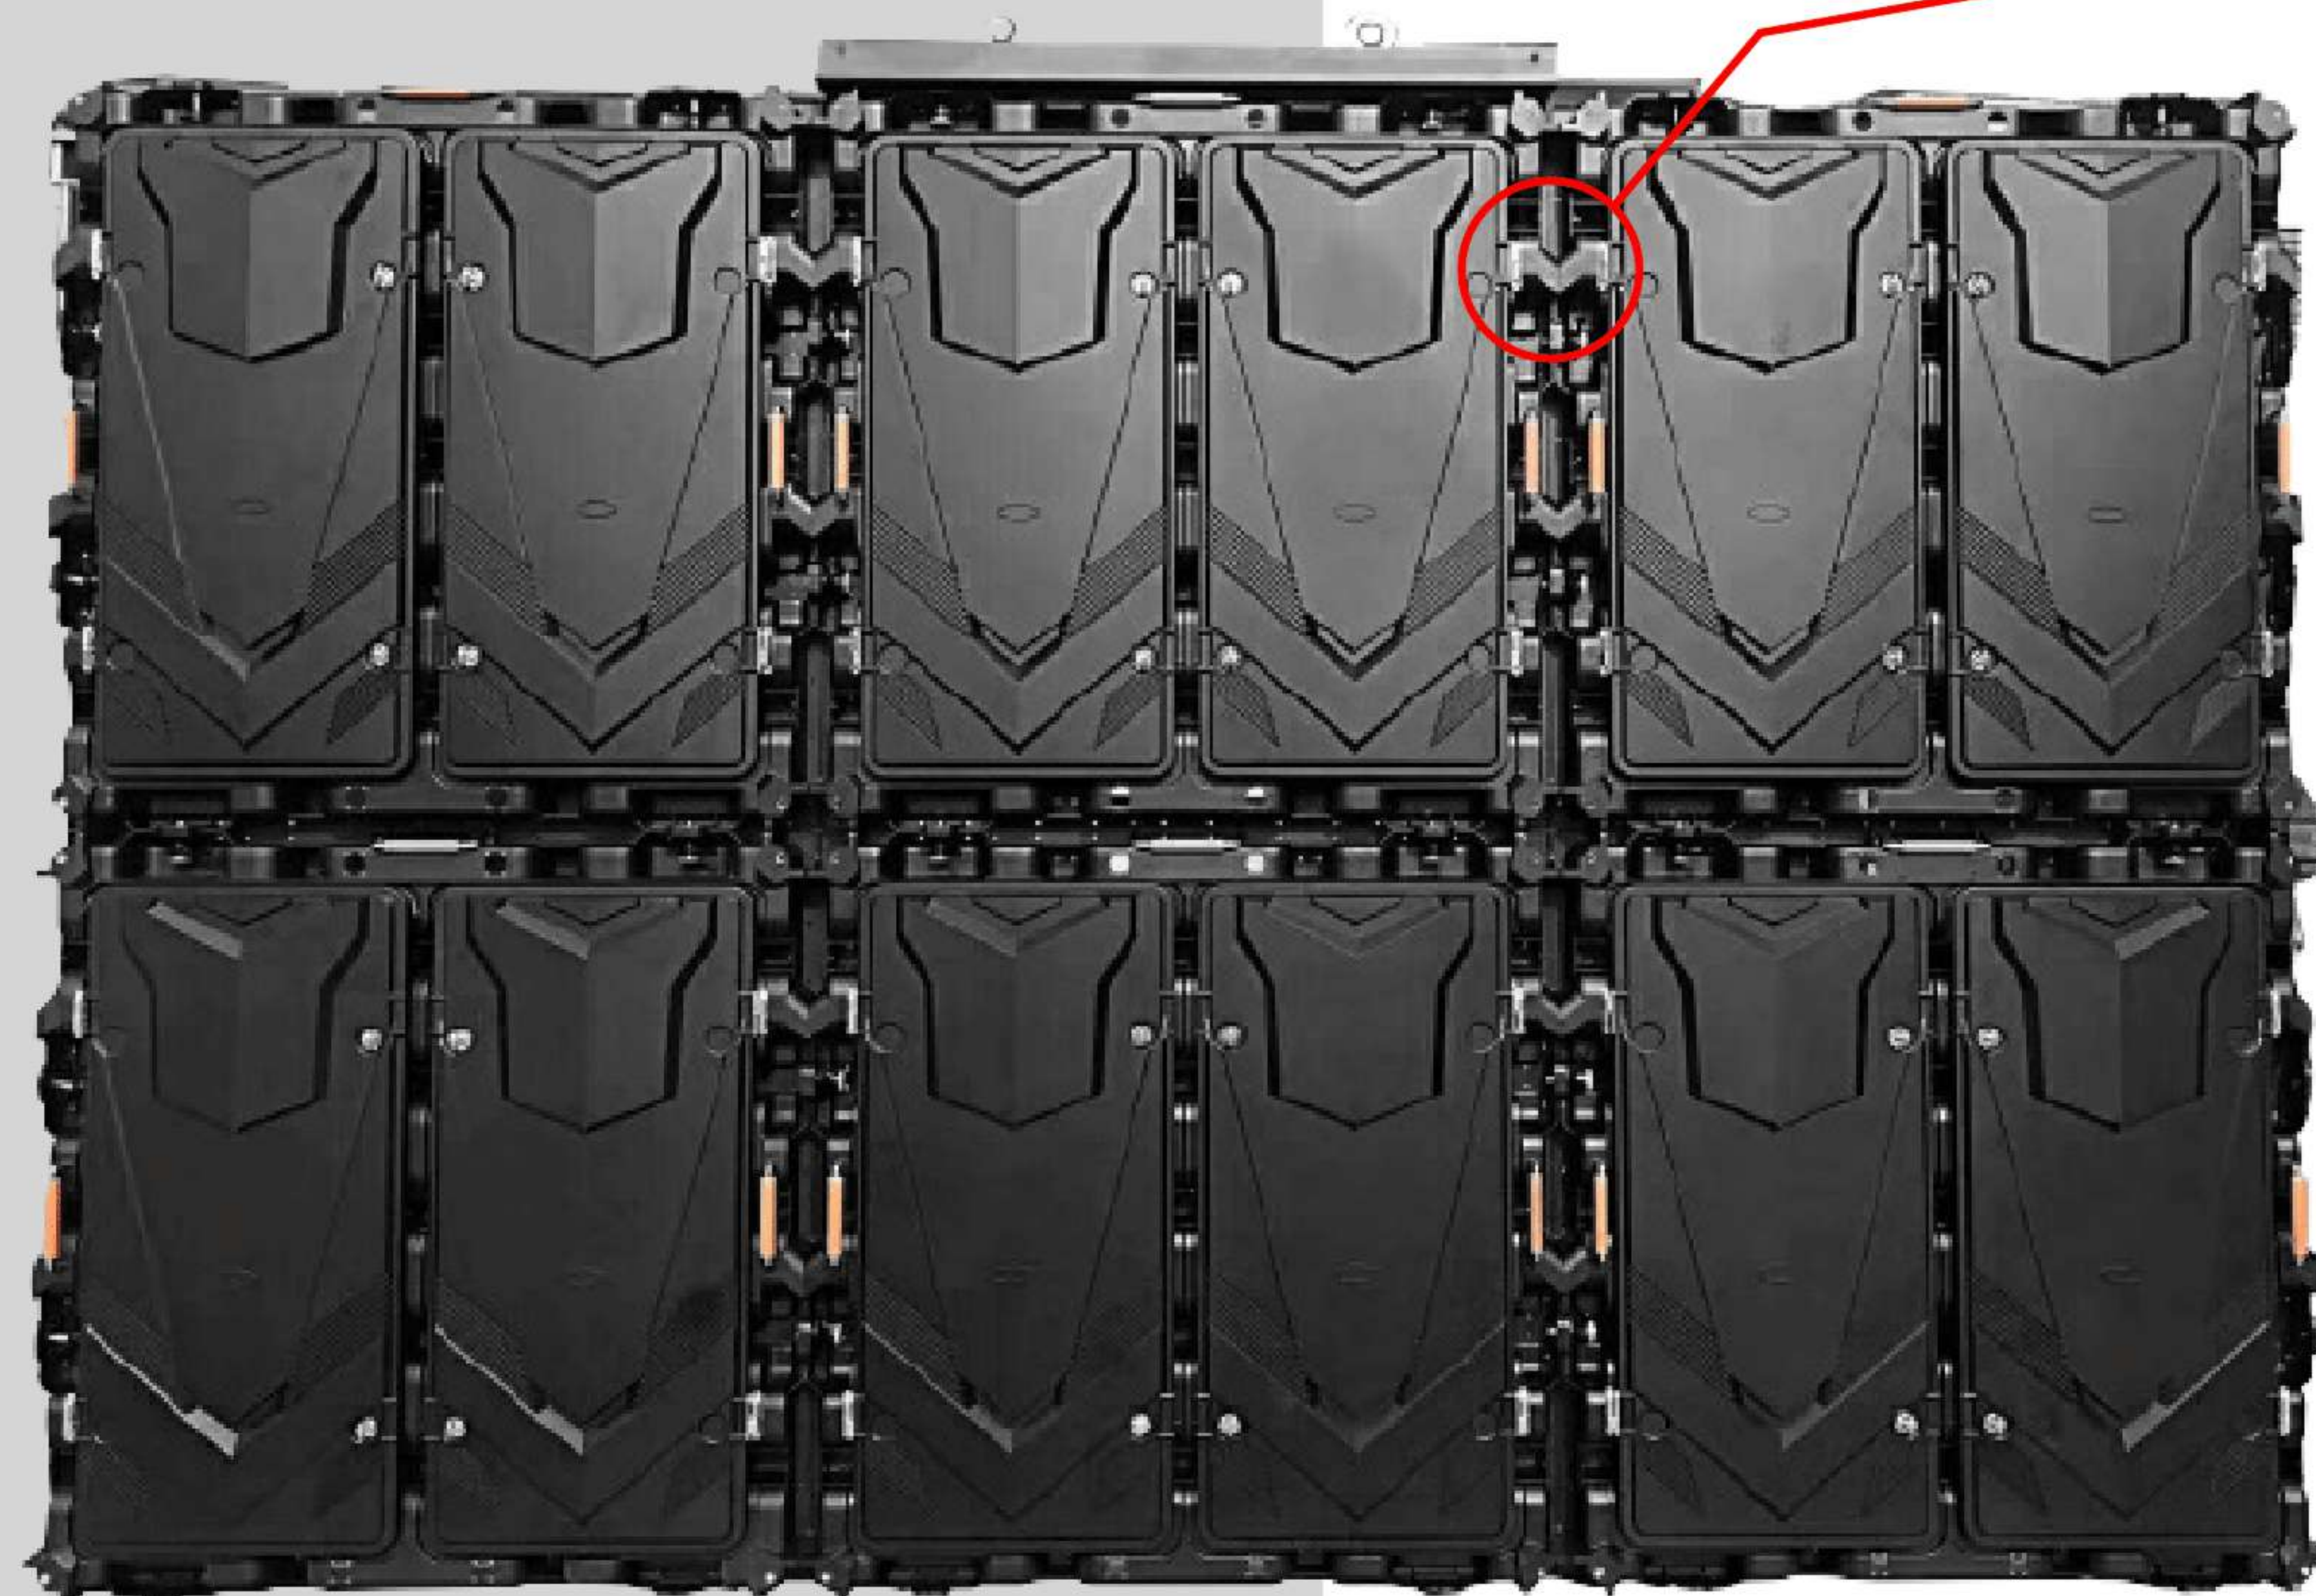

Cable binding whole
waterproof design

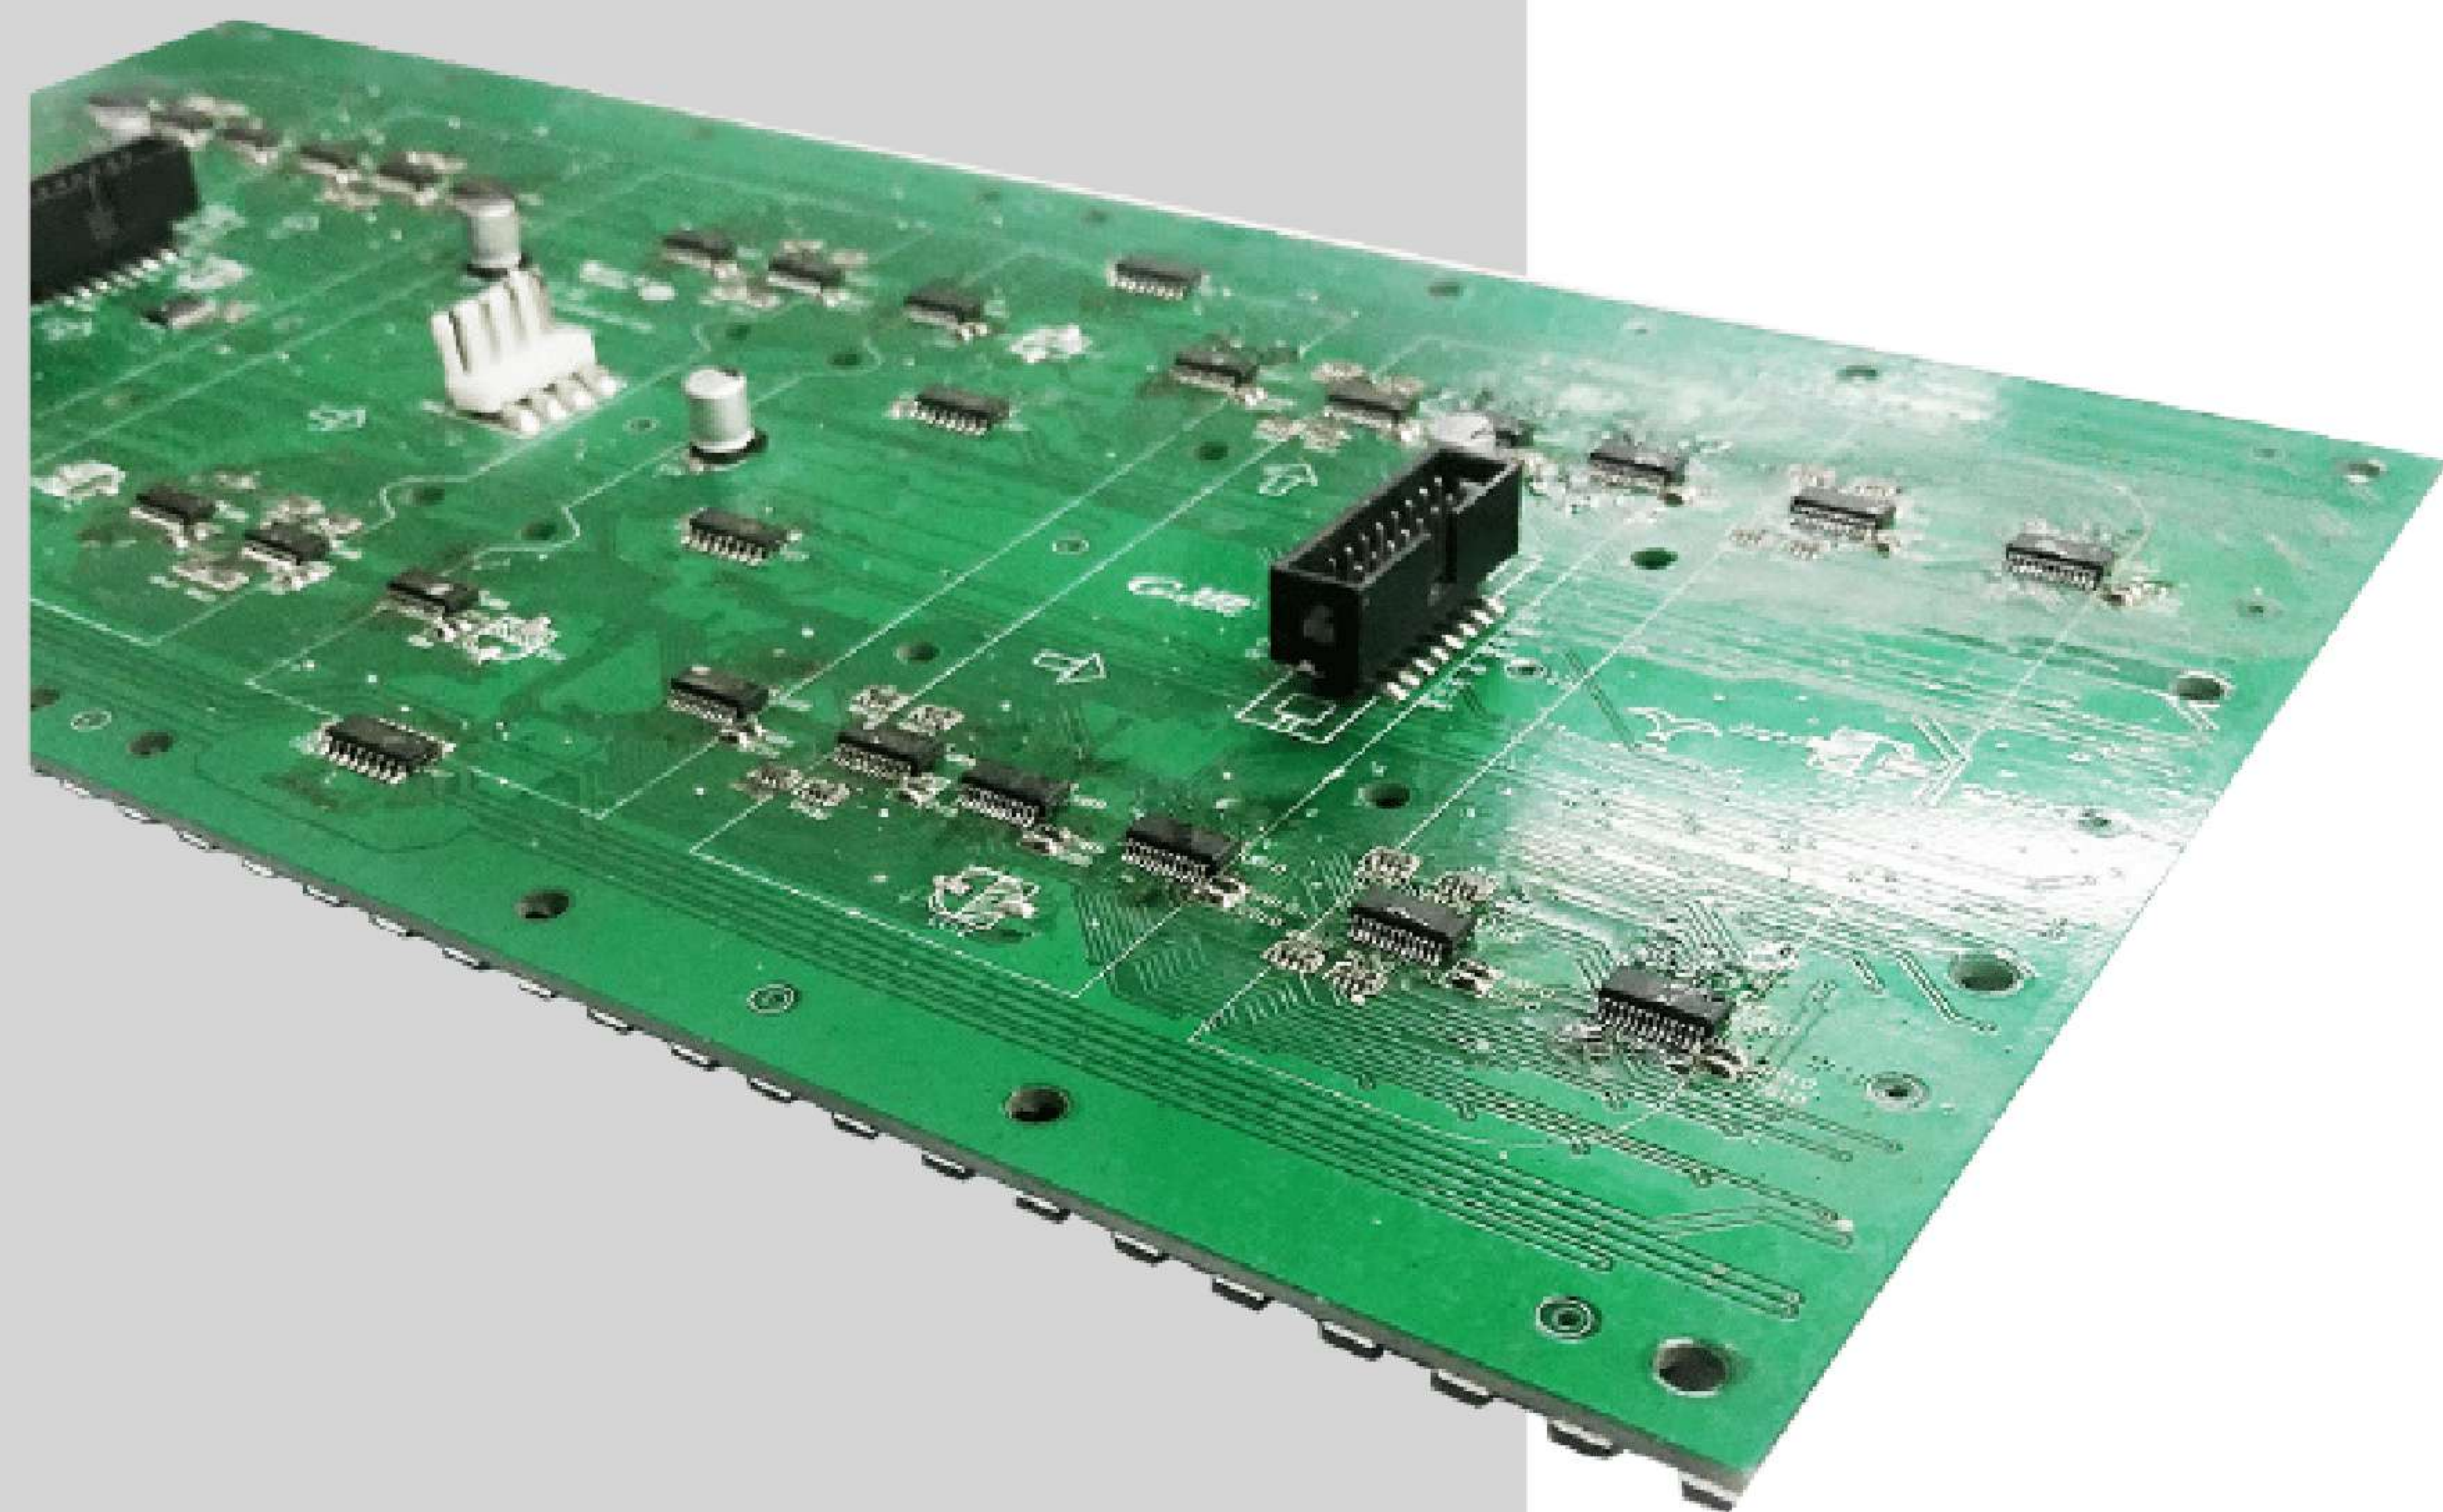

PCB Board

Painting for dustproof,
electrostatic prevention, moisture-proof


High quality material

Made by magnesium alloy material, Fast heat dissipation, anti wear and impact resistance


ILLUMINATE YOUR WORLD



ILLUMINATE YOUR WORLD

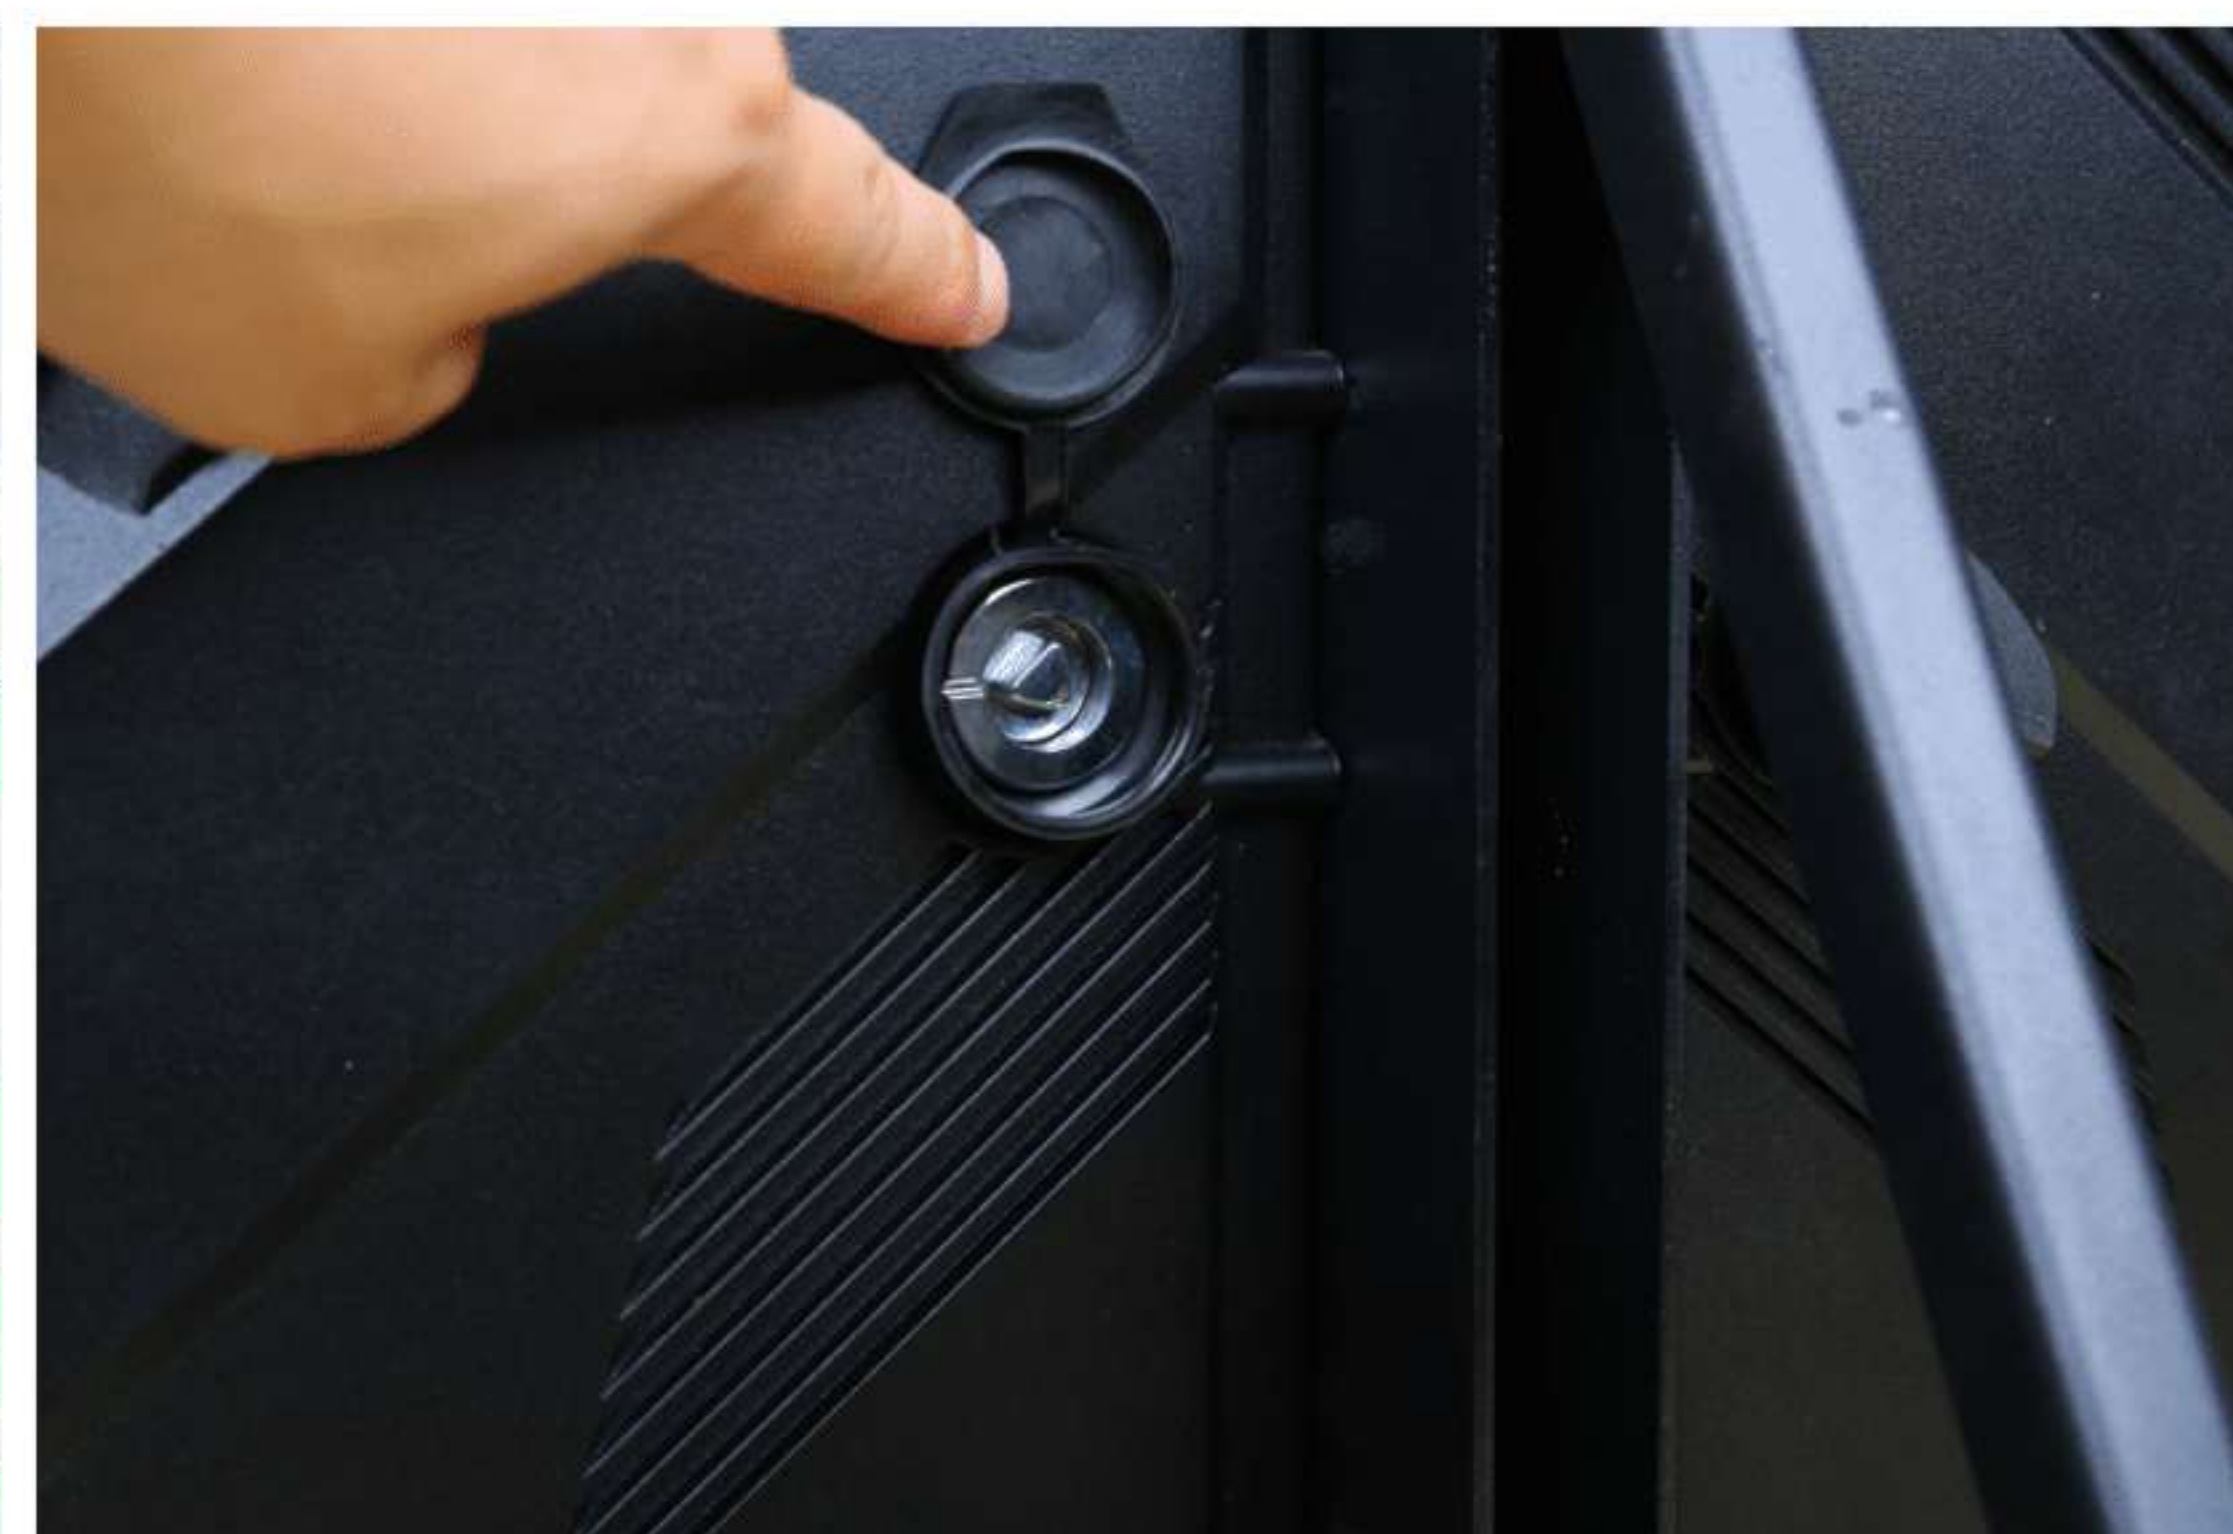

Designed by retaining plate on vent
Designed by waterproof rubber strip on door
Designed by waterproof cap on keyhole

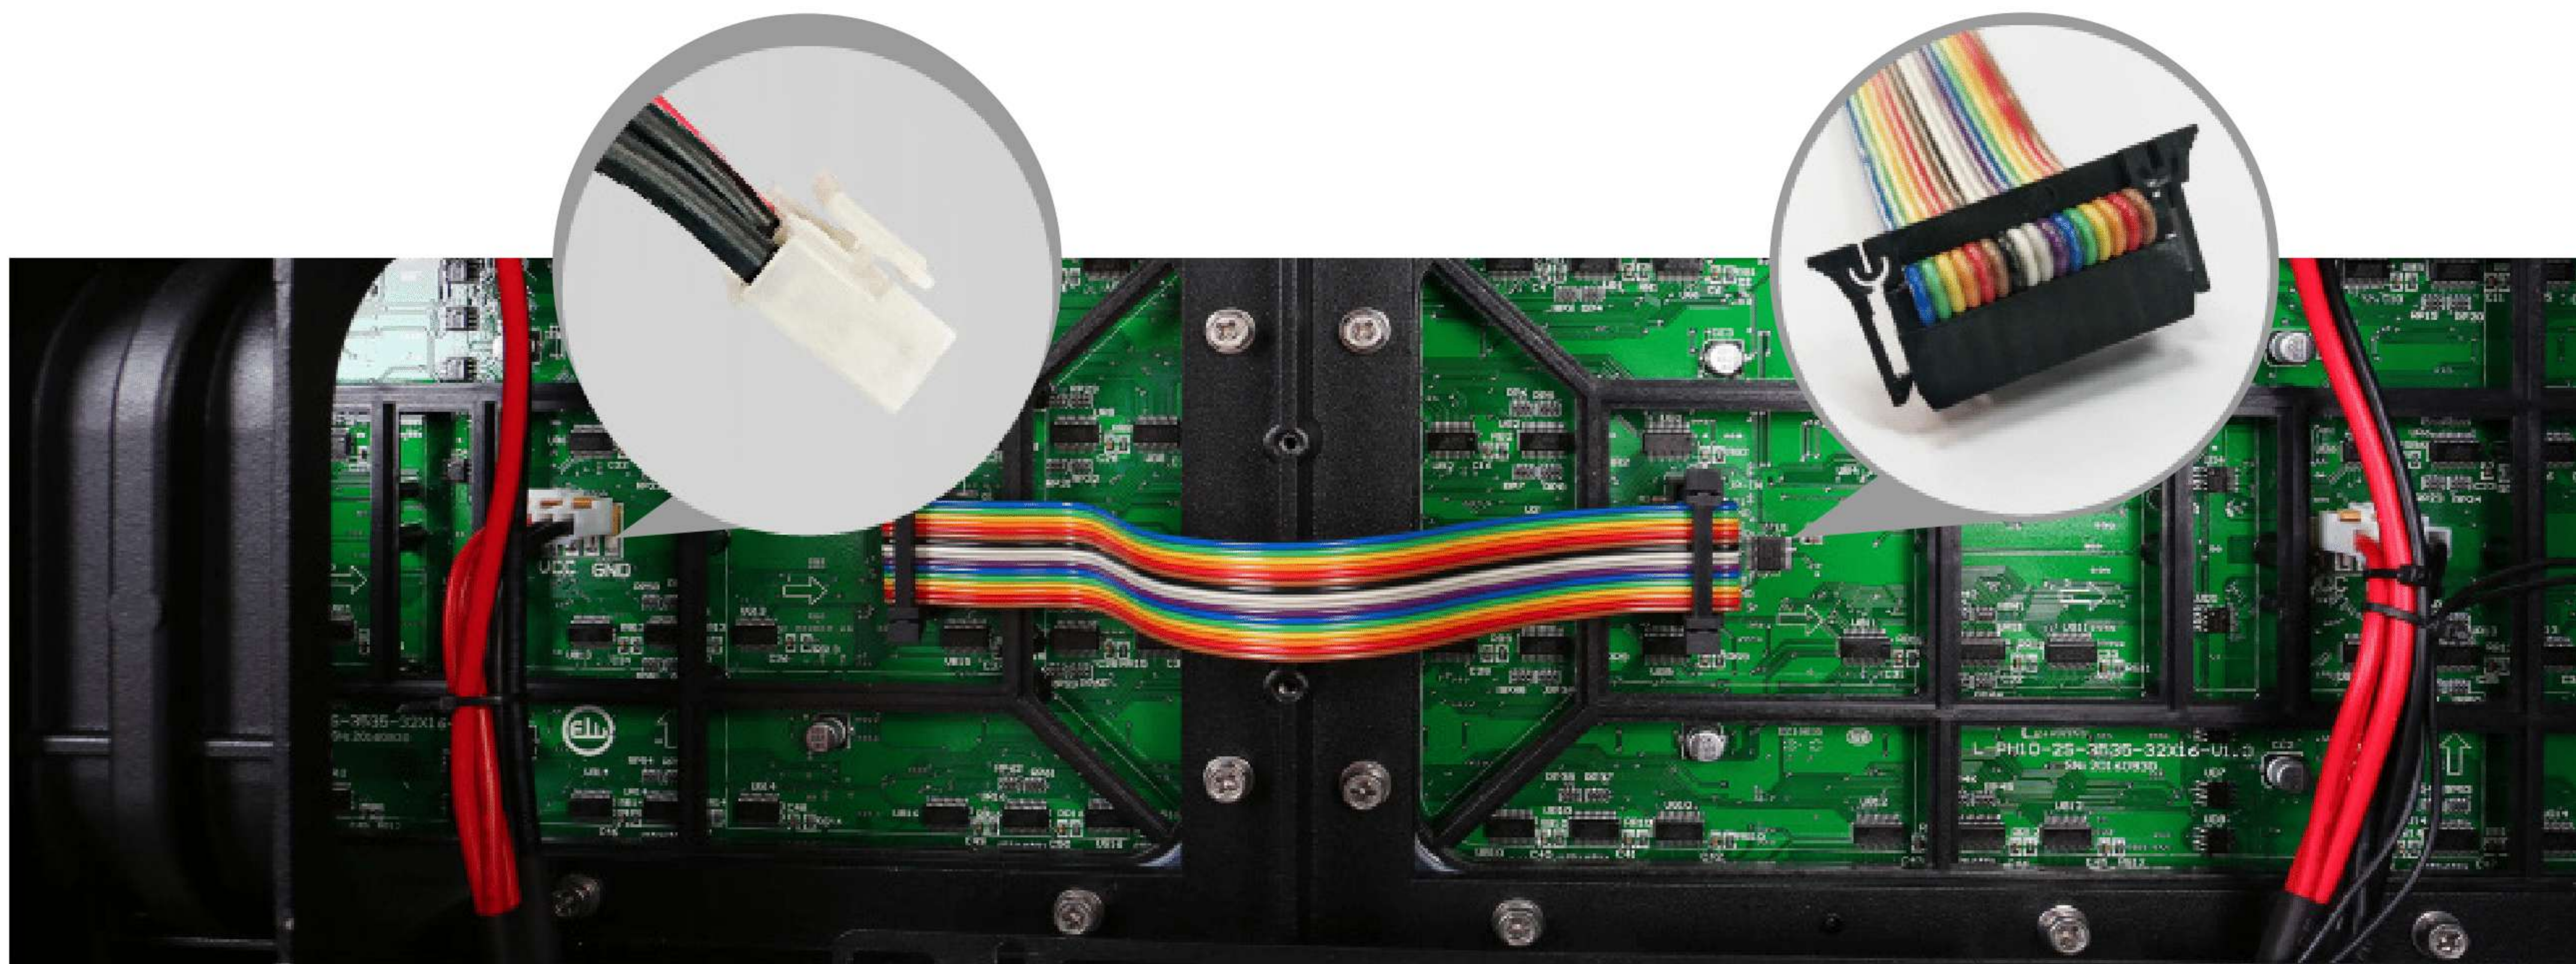

Signal cord and power cord with locker to avoid loose

Seamless splicing


seamless splicing for a better
display effect





hanging bar

In addition , can be hoisting mounted with hanging bar

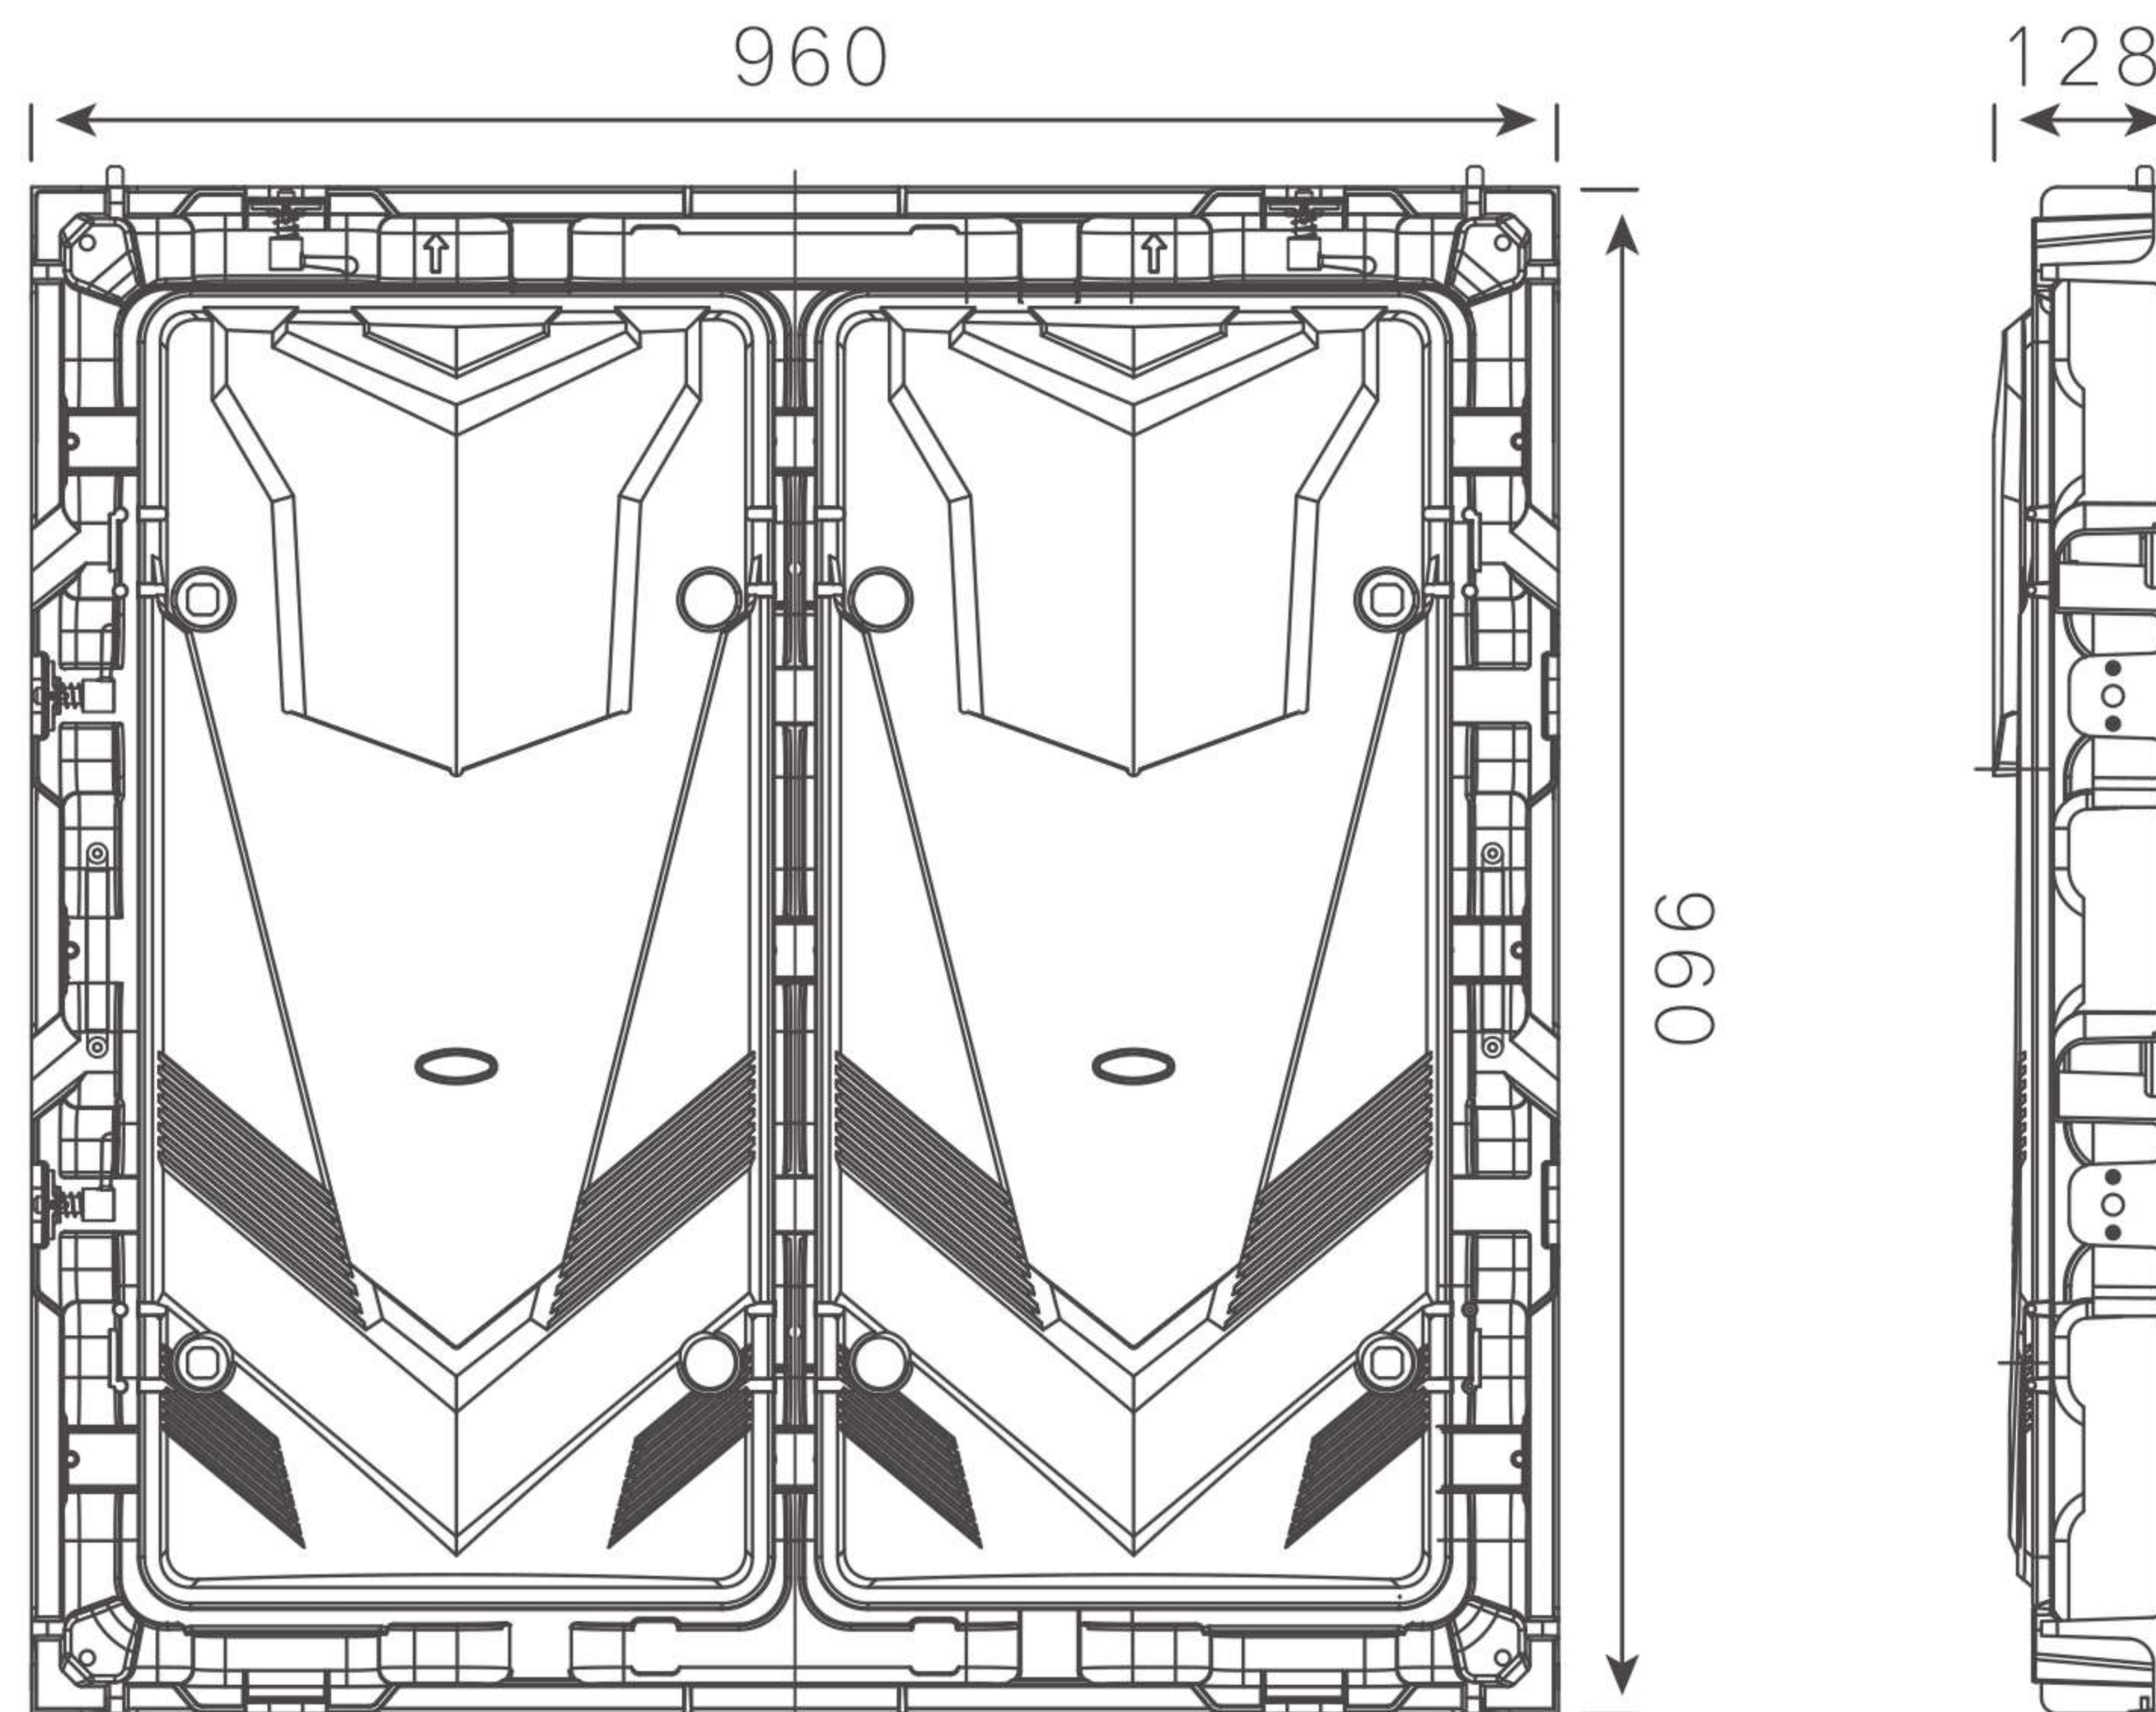


Unit : mm

型 号 Type Number	M4	M5	M666	M8
规格尺寸 Dimension(MM)	960 × 960 × 128MM	960 × 960 × 128MM	960 × 960 × 128MM	960 × 960 × 128MM
像素点间距 Pixel Pitch(MM)	4MM	5MM	6.66MM	8MM
LED规格 LED Standard	SMD2525/SMD1921	SMD2525/SMD1921	SMD3535	SMD3535
扫描模式 Scan Mode	1/10Scan	1/8Scan	1/6Scan	1/5Scan
像素密度 Pixel Density(Dot/m ²)	62500 Dot/m ²	40000 Dot/m ²	22500 Dot/m ²	15625 Dot/m ²
最大功率 Max.Power(W)	1200W	900W	900W	600W
箱体重量 Cabinet Weight(KG)	28KG	26KG	26KG	26KG
刷 新 率 Refresh Rate (Hz)	3840Hz	1920/3840Hz	1920Hz	1920/3840Hz
亮 度 Brightness (CD/m ²)	5000CD/m ²			
可视角度 Viewing Angle	130 °			
防护等级 Protection Level	IP65			
箱体材质 Cabinet Material	Aluminum alloy			
维护方式 Maintenance Method	Back Maintenance			
灰度等级 Grey Level	16 Bit			
工作温度 Working Temperature	-20~60℃			
工作湿度 Working humidity	10%-90%RH			
使用寿命 Life Span	≥50000 Hours			
工作电压 Working Voltage	AC 110V/220V,50/60HZ			



CHARMINGLED PROJECT CASE

ILLUMINATE YOUR WORLD

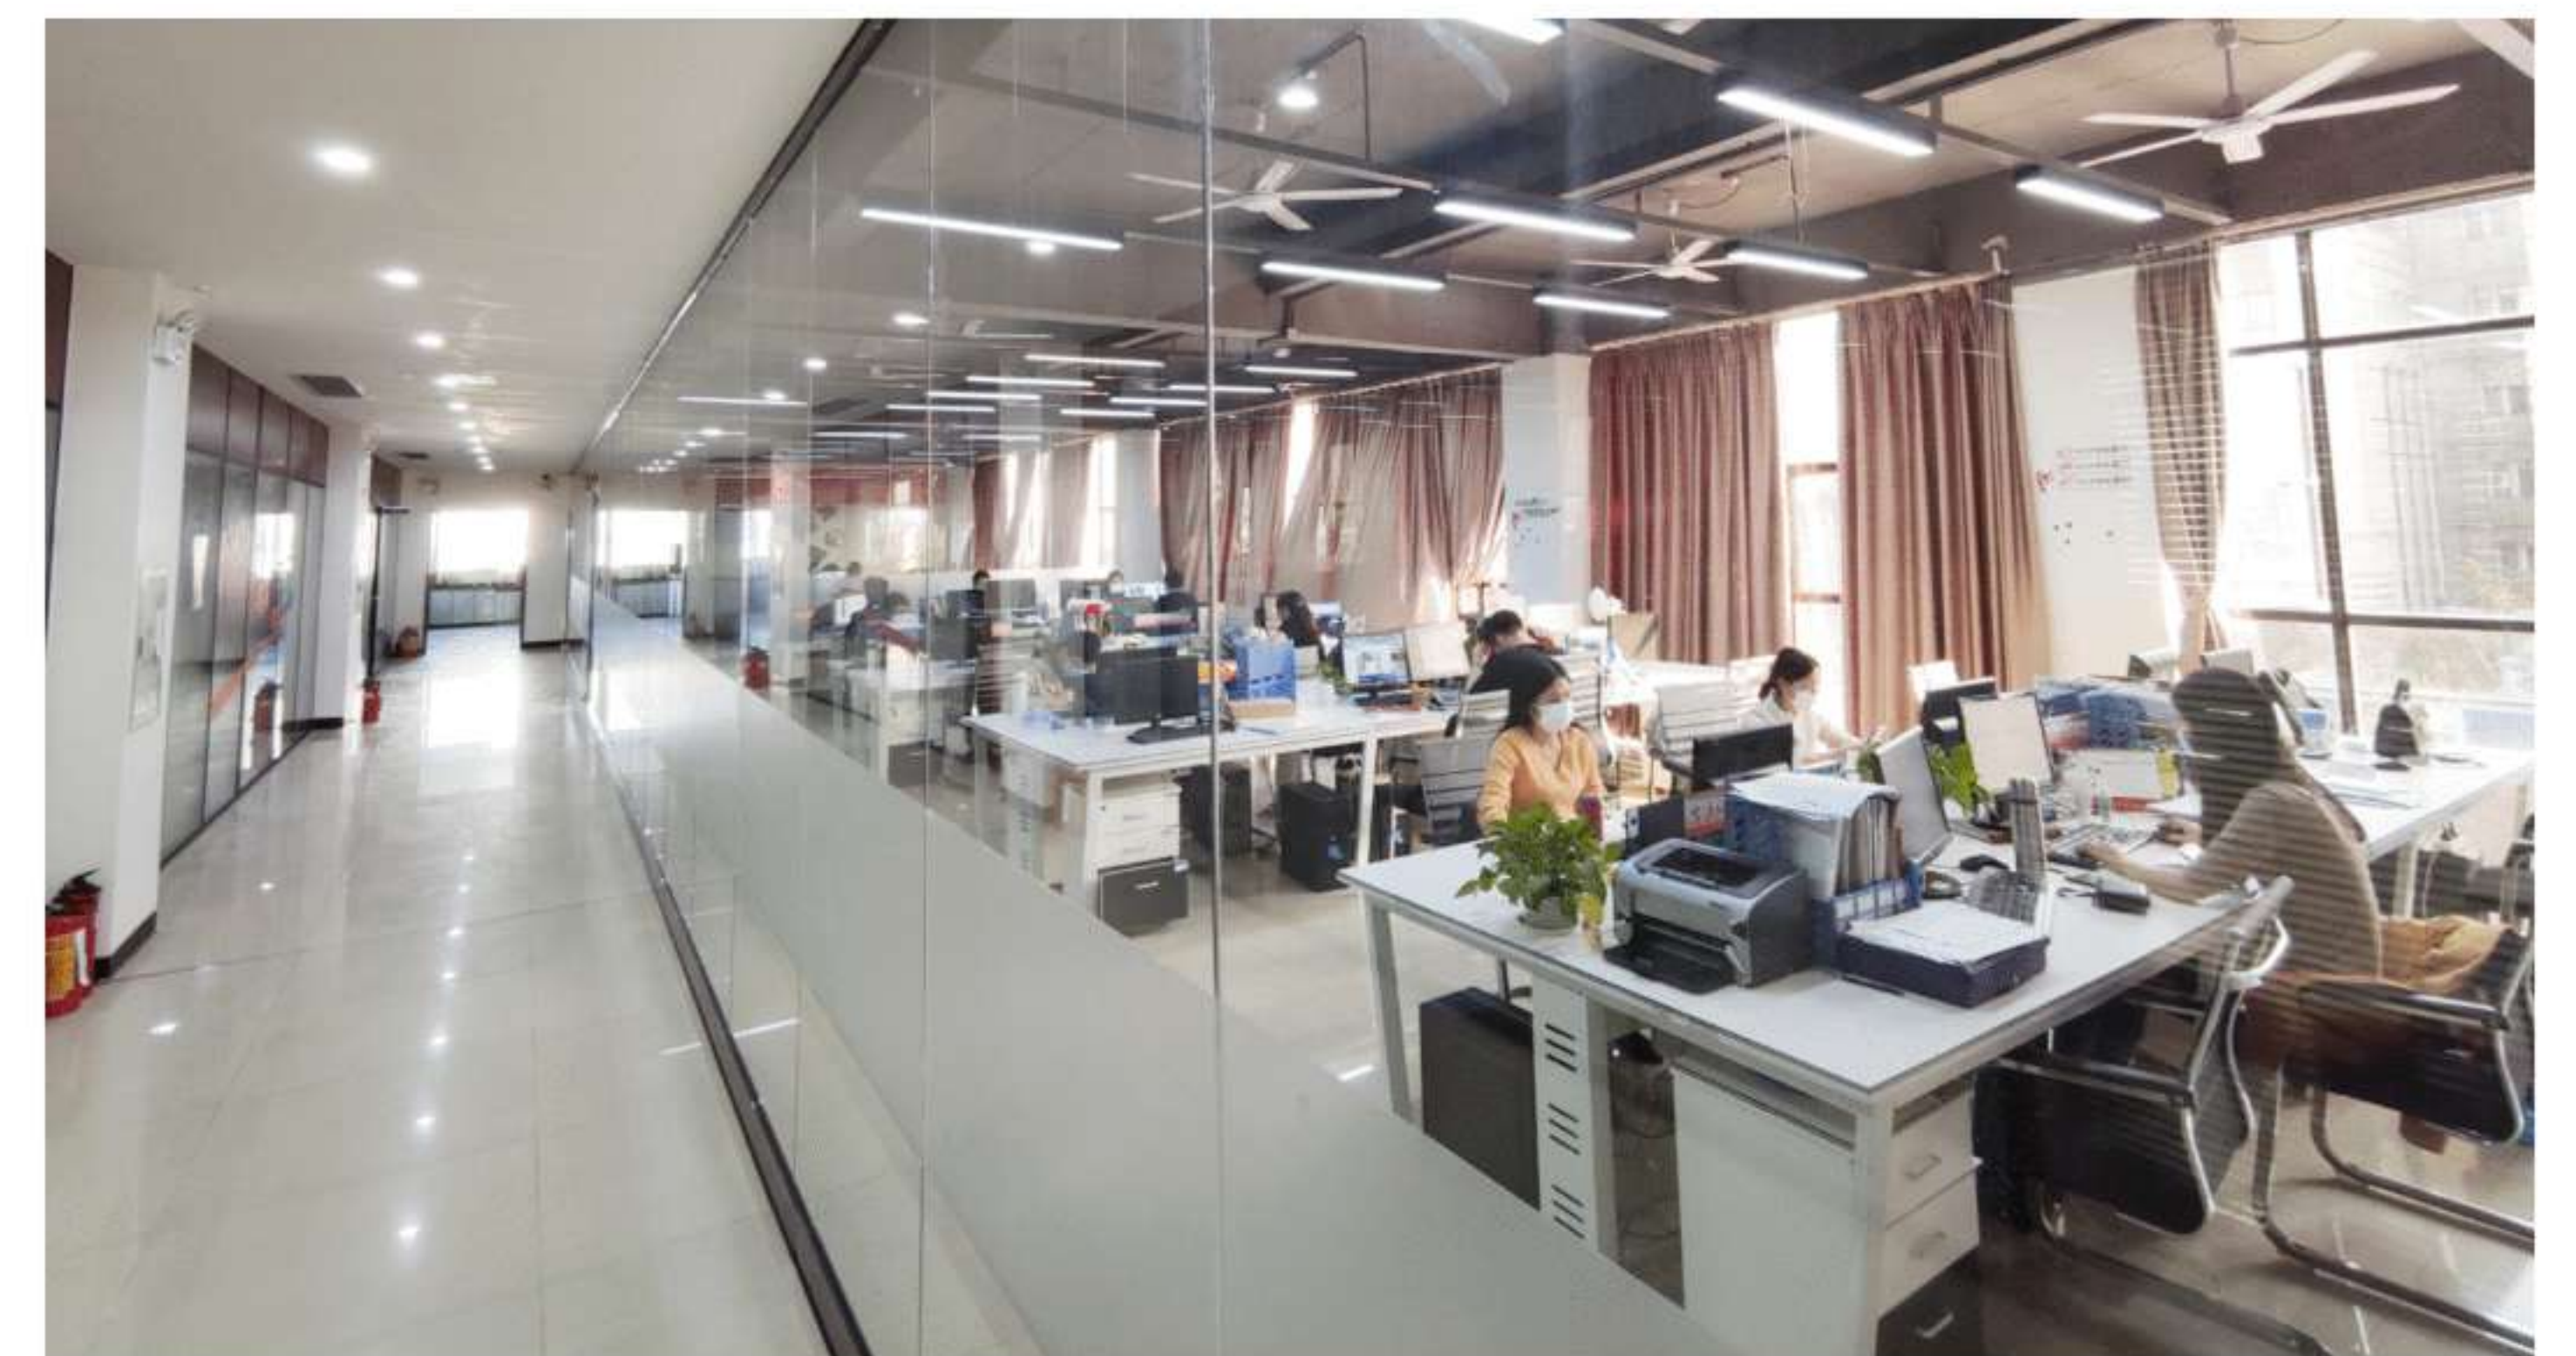

CERTIFICATE

CE, RoHS, BIS, CB, IECEE ISO9001:2008 Certified



More than 20,000 successful projects / 130 patents

OFFICIAL PARTNERS

(LISTED COMPANIES)

CHINA BEST
POWER SUPPLY
SUPPLIER



CHINA TOP 1
LED SYSTEM
SUPPLIER



CHINA TOP 1
LED IC
SUPPLIER



CHINA BEST
LED LAMP
SUPPLIER



GERMANY ORIGINAL
MUSIC TO LIGHT
SOFTWARE



CARGO SHIPPING

Frequent destinations including: More than 150 countries,
More than 20,000 customers (USA, Mexico, Spain,
Germany, France, UK, Saudi Arabia, UAE, India, Indonesia, Australia etc.)



Accept different shipping terms, such as EXW, FOB, CFR, CIF, DDU and DDP, plenty of shipping resources are available to make you rest-assured of shipping.


PRODUCTION PROCESS DIAGRAW

生产工艺示意图




PRODUCTION PROCESS DIAGRAM

生产工艺示意图

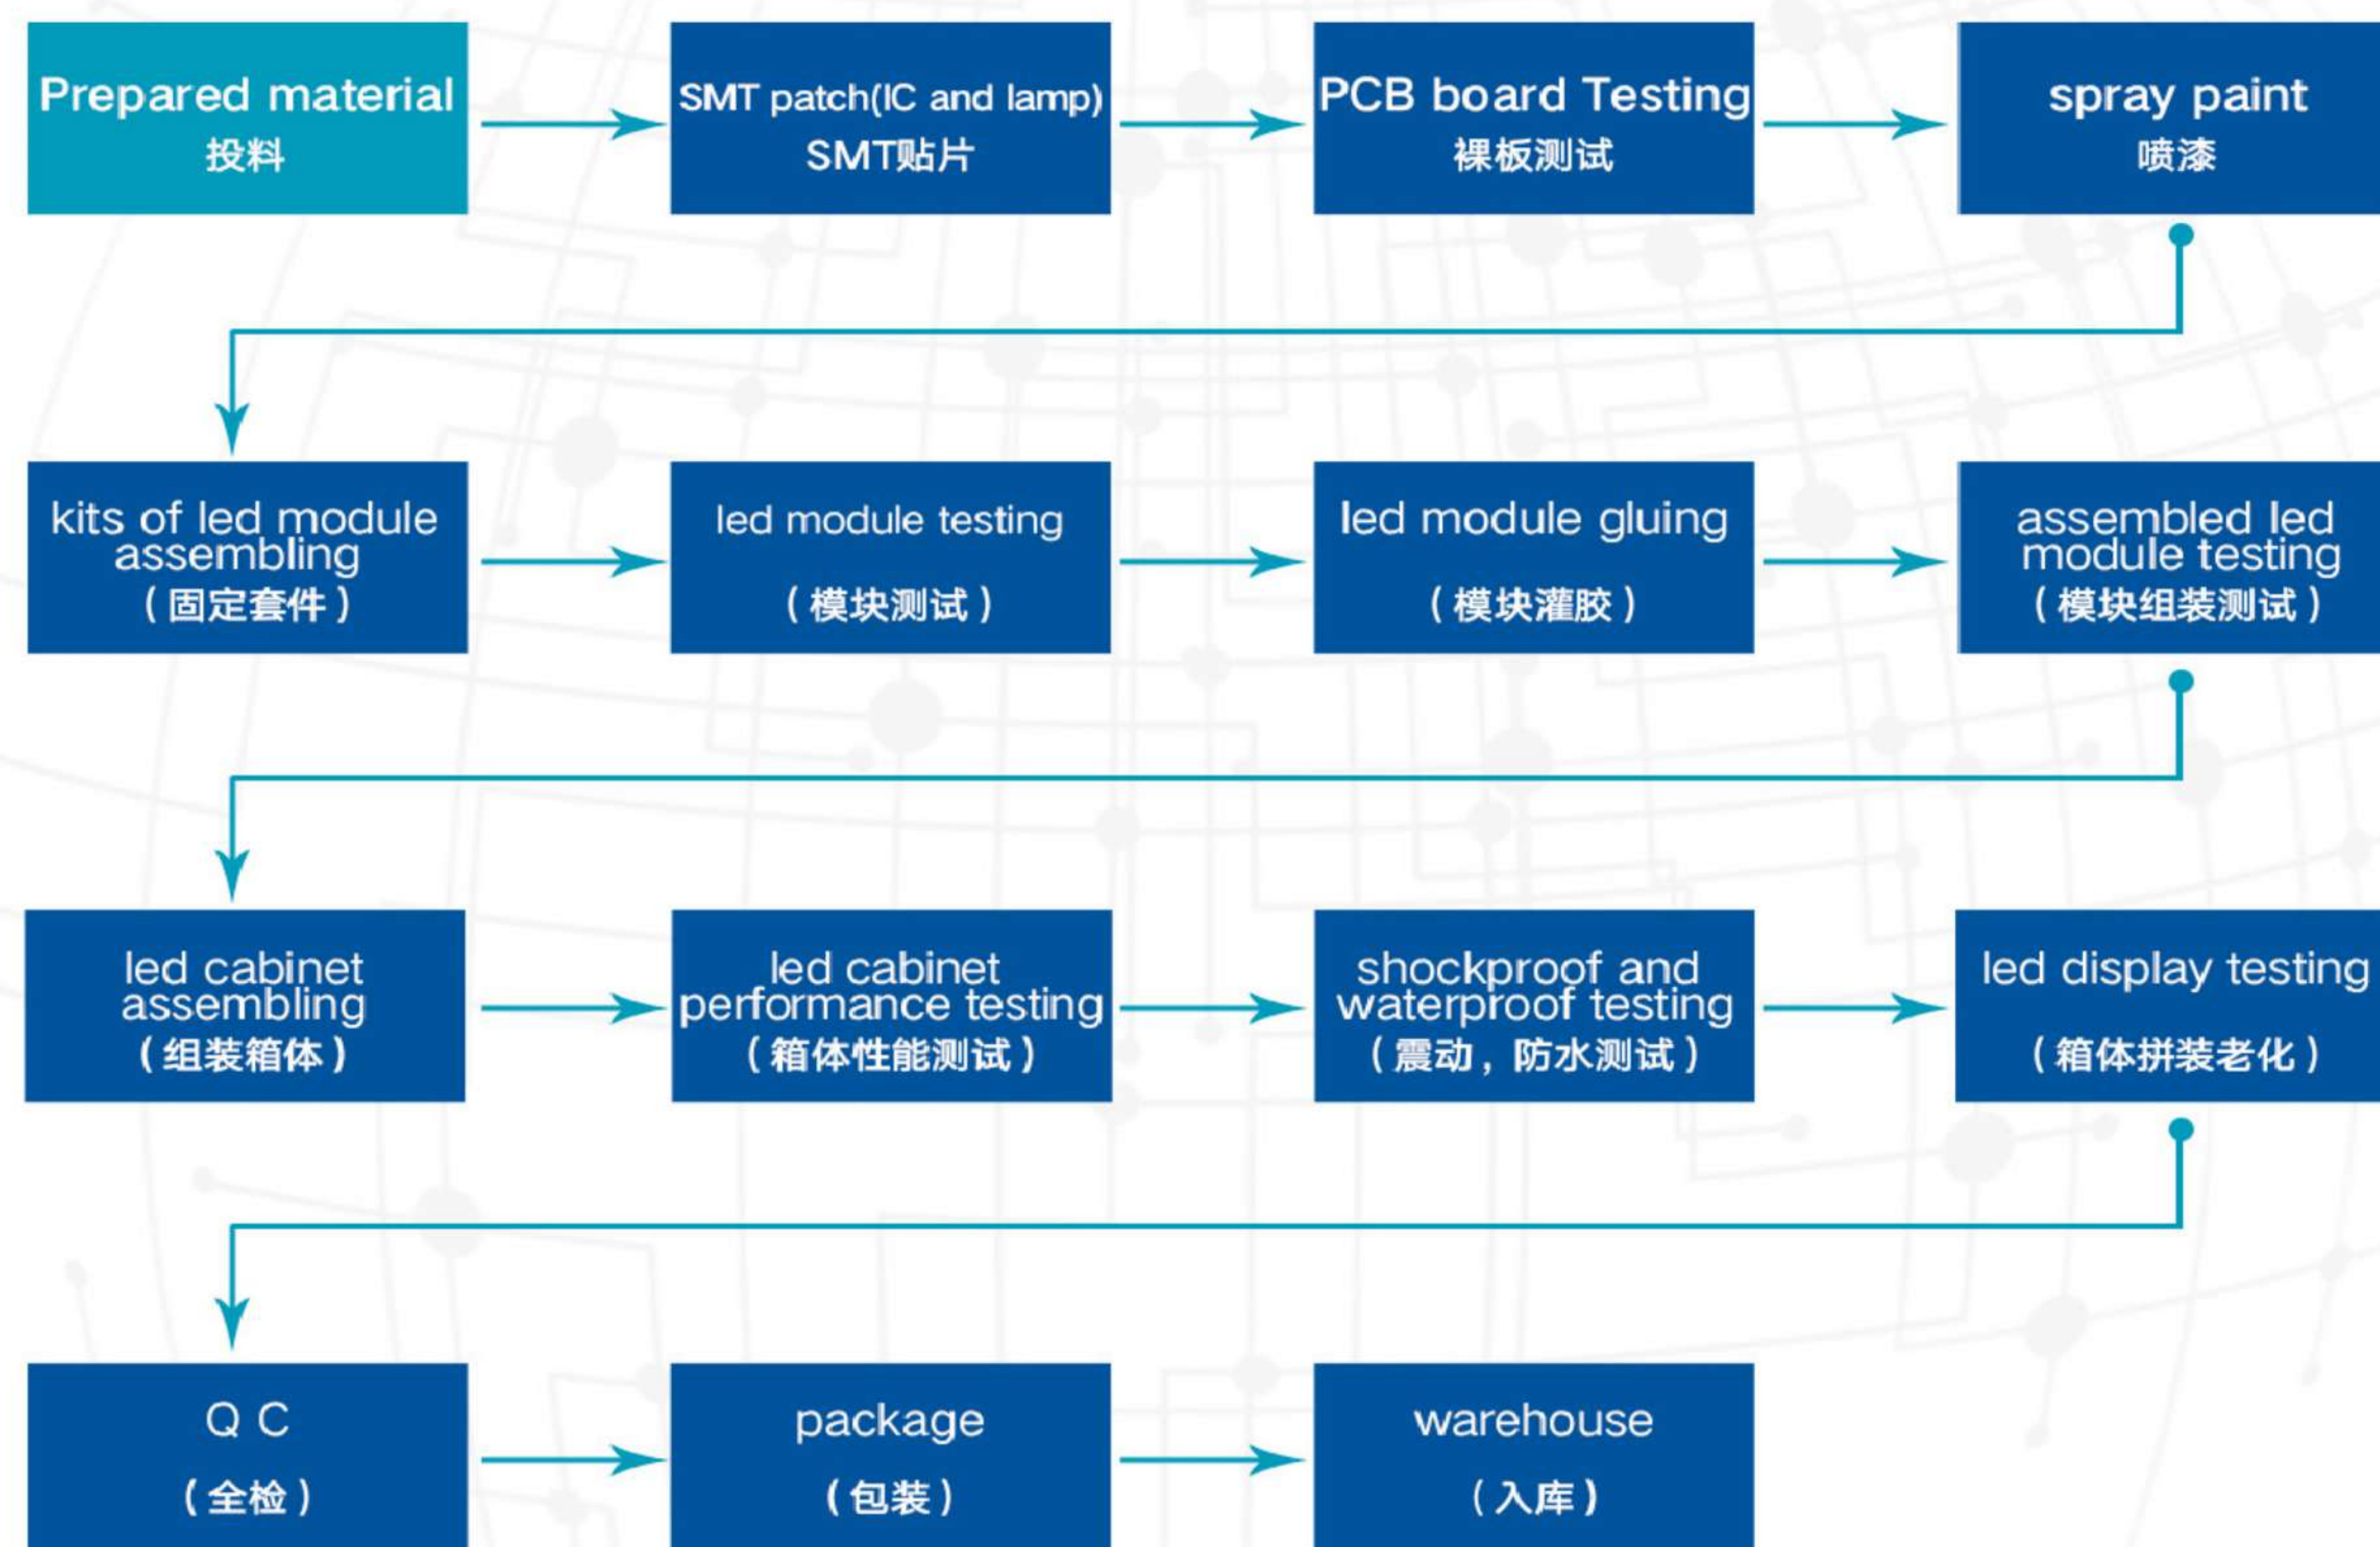

SCREEN LINE CONNECTION DIAGRAM

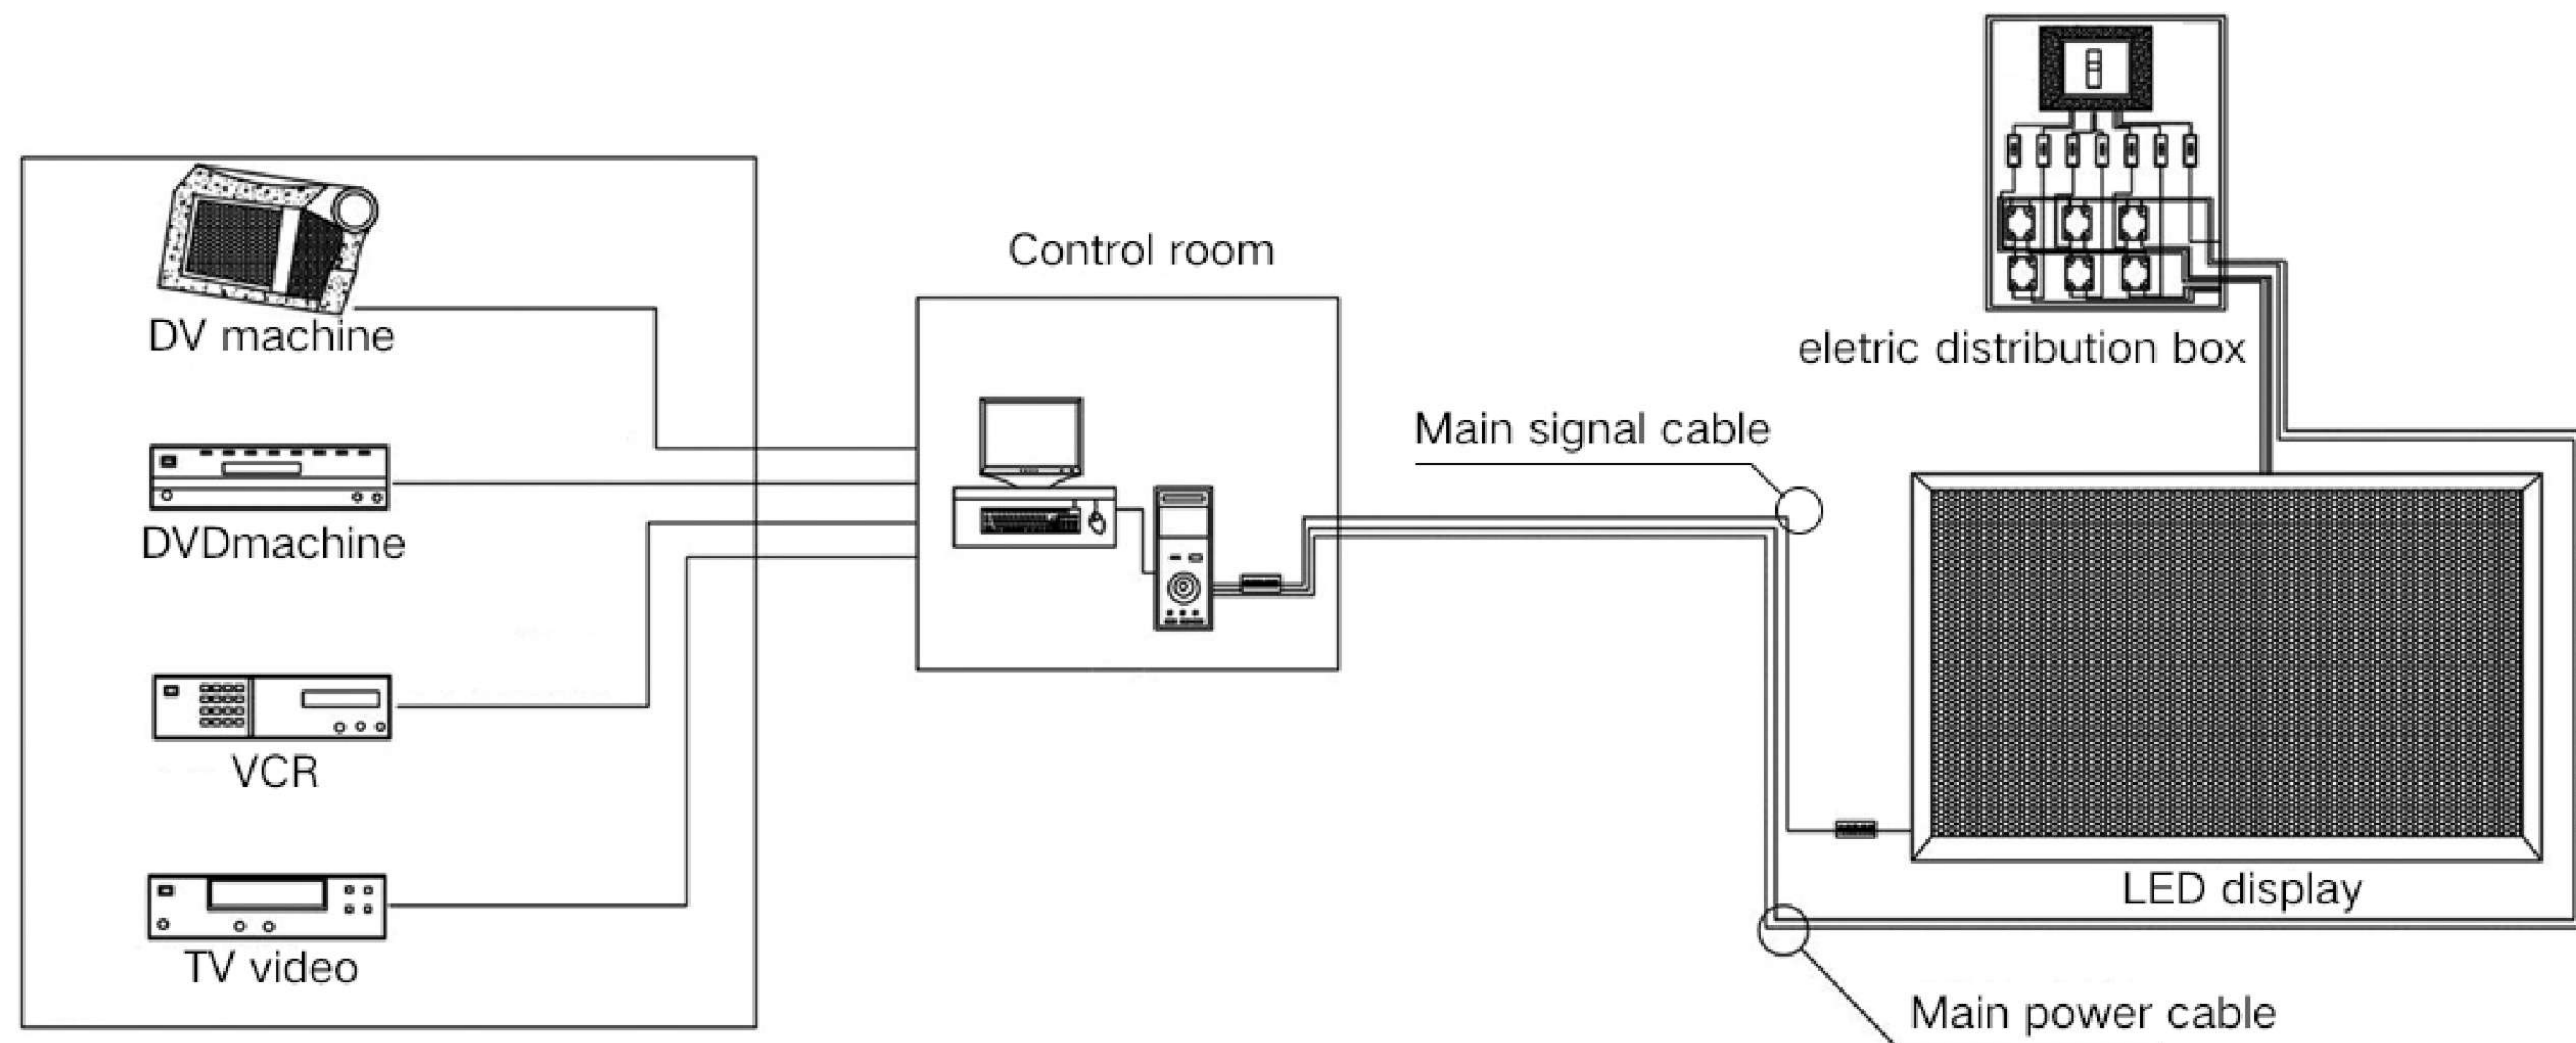

THE EXHIBITION SHOW

GET SHOW 、PROSOUND + LIGHT 、ISE 、INFOCOMM



THE COMPANY SHOWS



Headquarters
building



Charming Co.,Ltd



Guangzhou Charming
Lighting Co.,Ltd



C&e Tech Usa Inc



Madrix China

PRODUCT PACKAGING

According to the different packing patterns of different products, wooden case packing , flight case packing.



Wooden case packing



Flight case packing

CREATE A MORE BEAUTIFUL VISUAL FEAST FOR THE WORLD



CHARMING CO.LTD

Address: Guangdong Foshan - Nanhai Charming Headquarters

WWW.CHARMINGLED.NET



FORTIS TECH CO.LTD

Address: A-01, Gomes Industrial Estate, Andheri East, Mumbai

WWW.FORTISTECH.IN

