

Iron Cabinet

LED Outdoor Display

CHARMING CO.LTD


WWW.CHARMINGLED.NET

I L L U M I N A T E Y O U R W O R L D



LED OUTDOOR DISPLAY (Iron Cabinet)

P4/P5/P6.66/P8

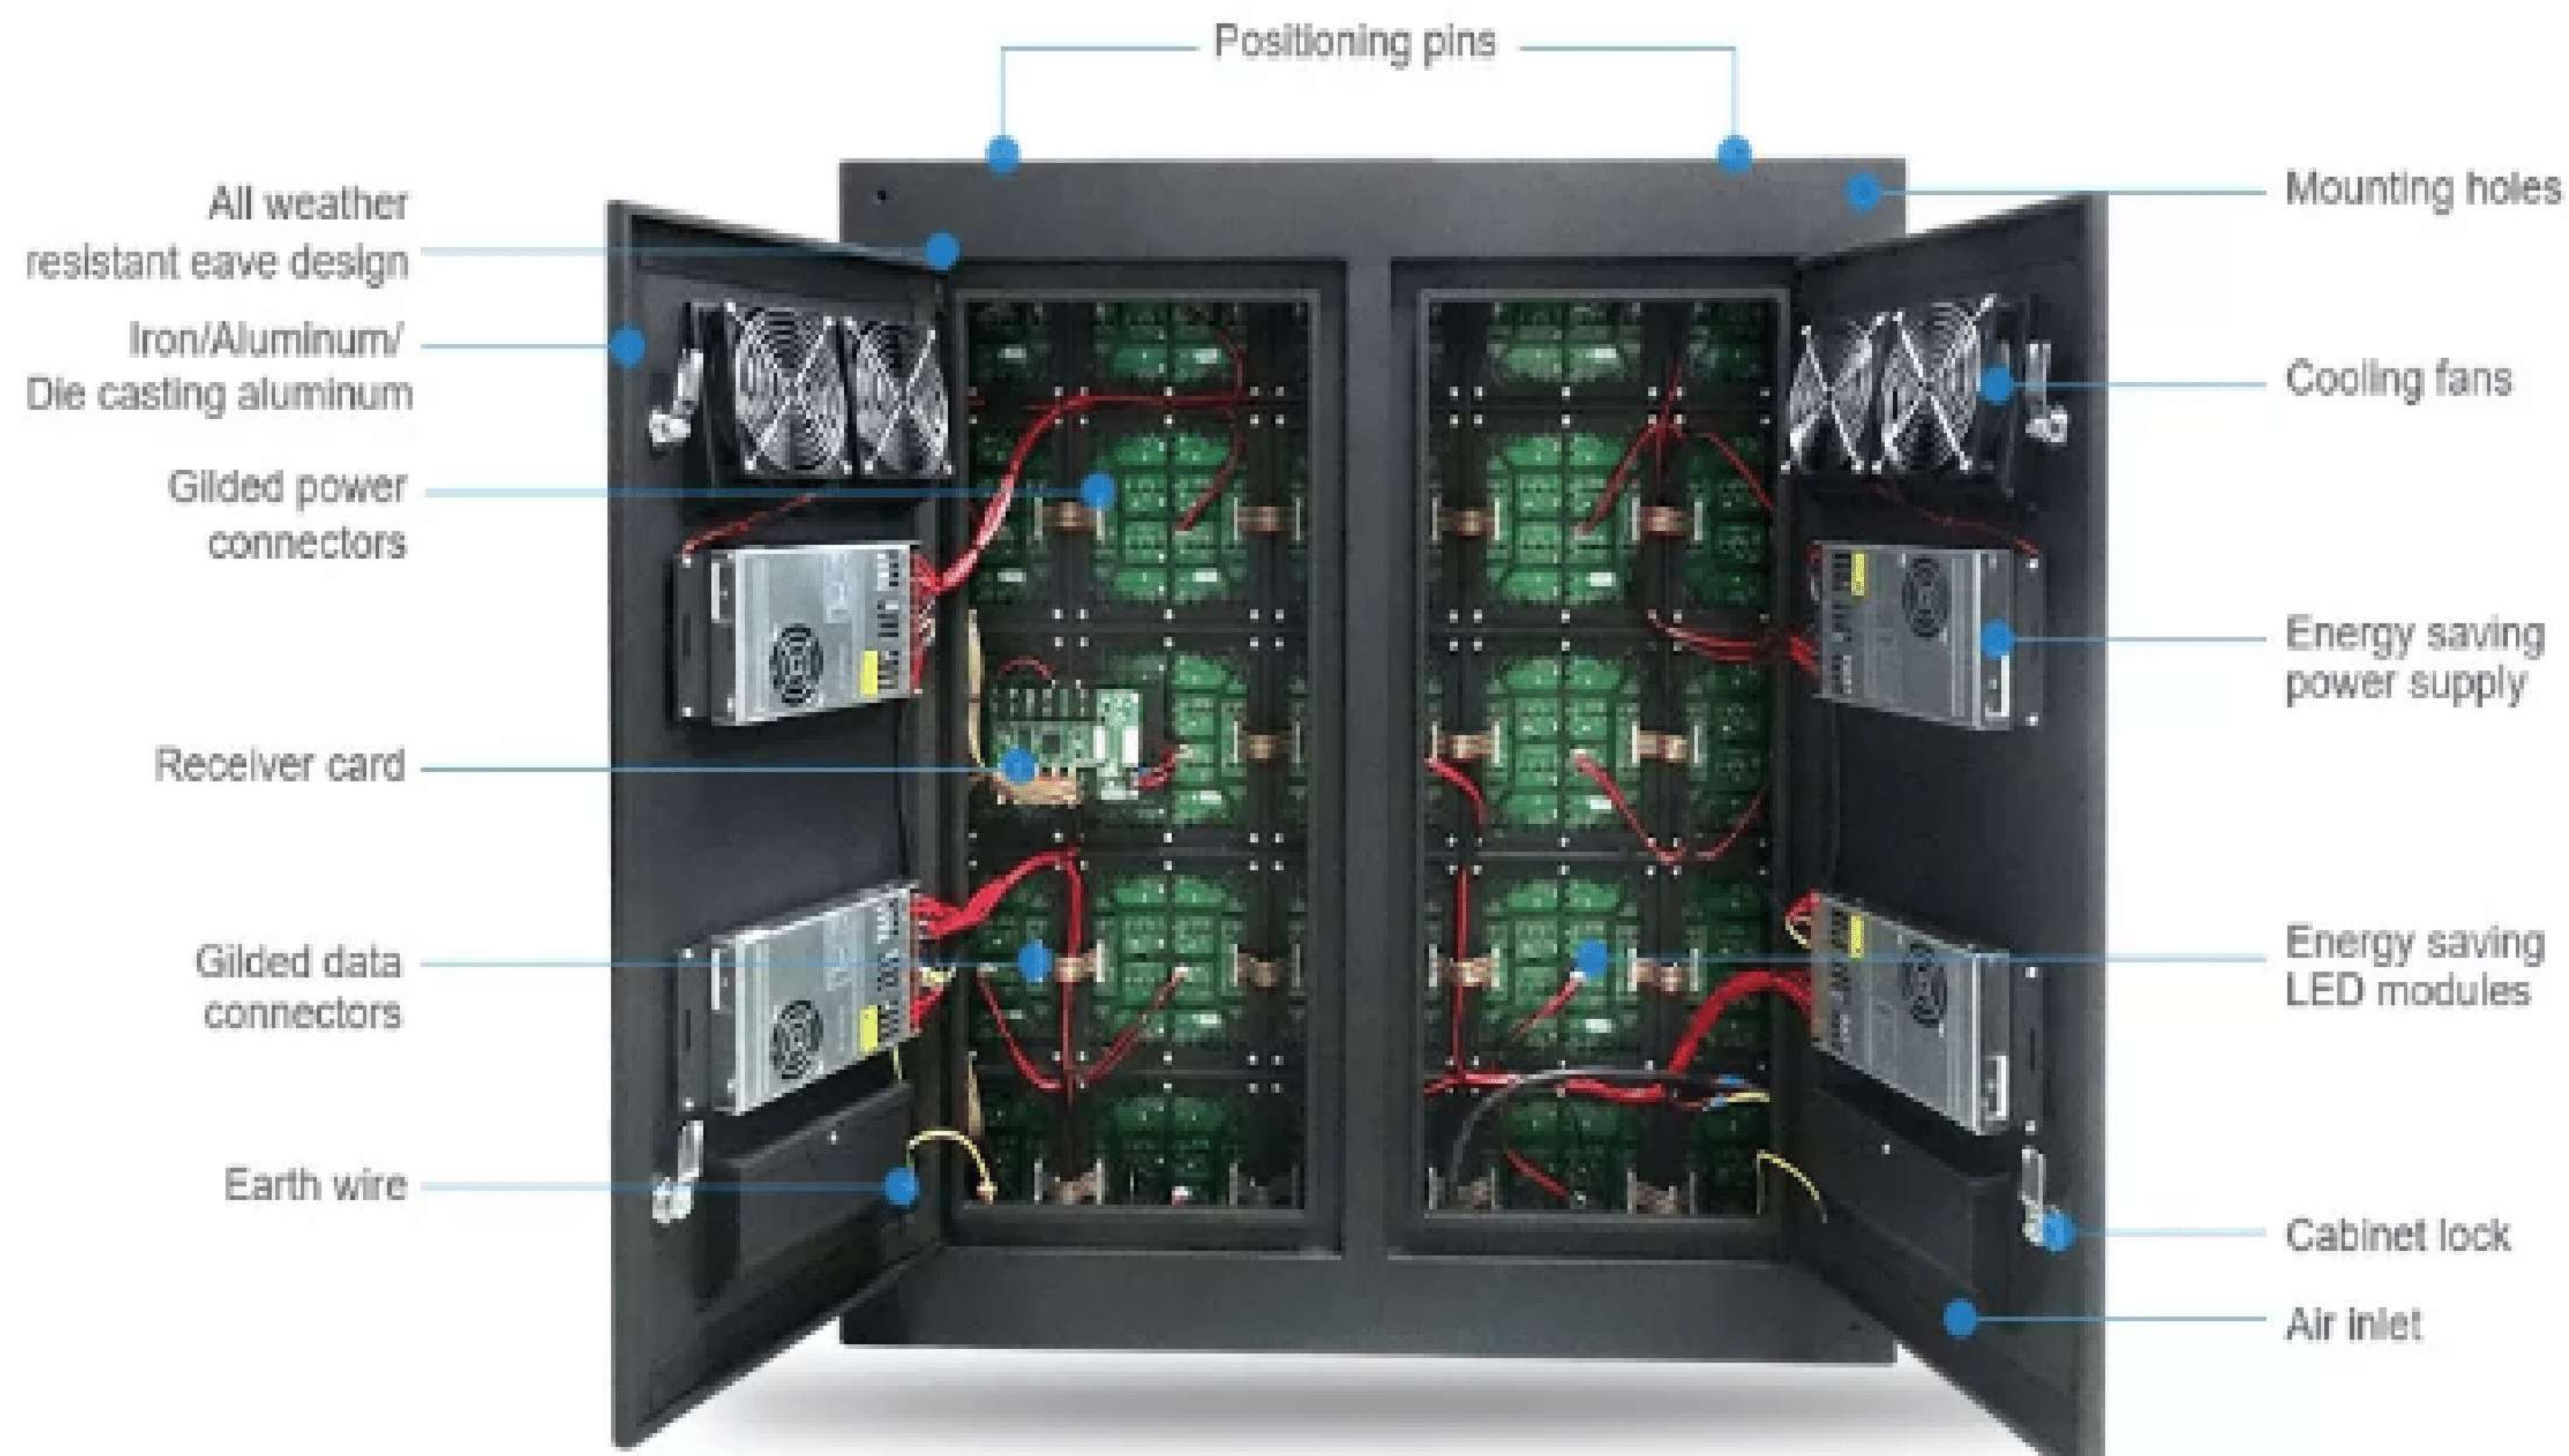

Picture is just reference

Ultralight, About **30** kgs weight





RGB



C E



Low heating-up



High definition
display



Seamless



Easy maintenance



IP65




Low power




Ultra low noise
operation



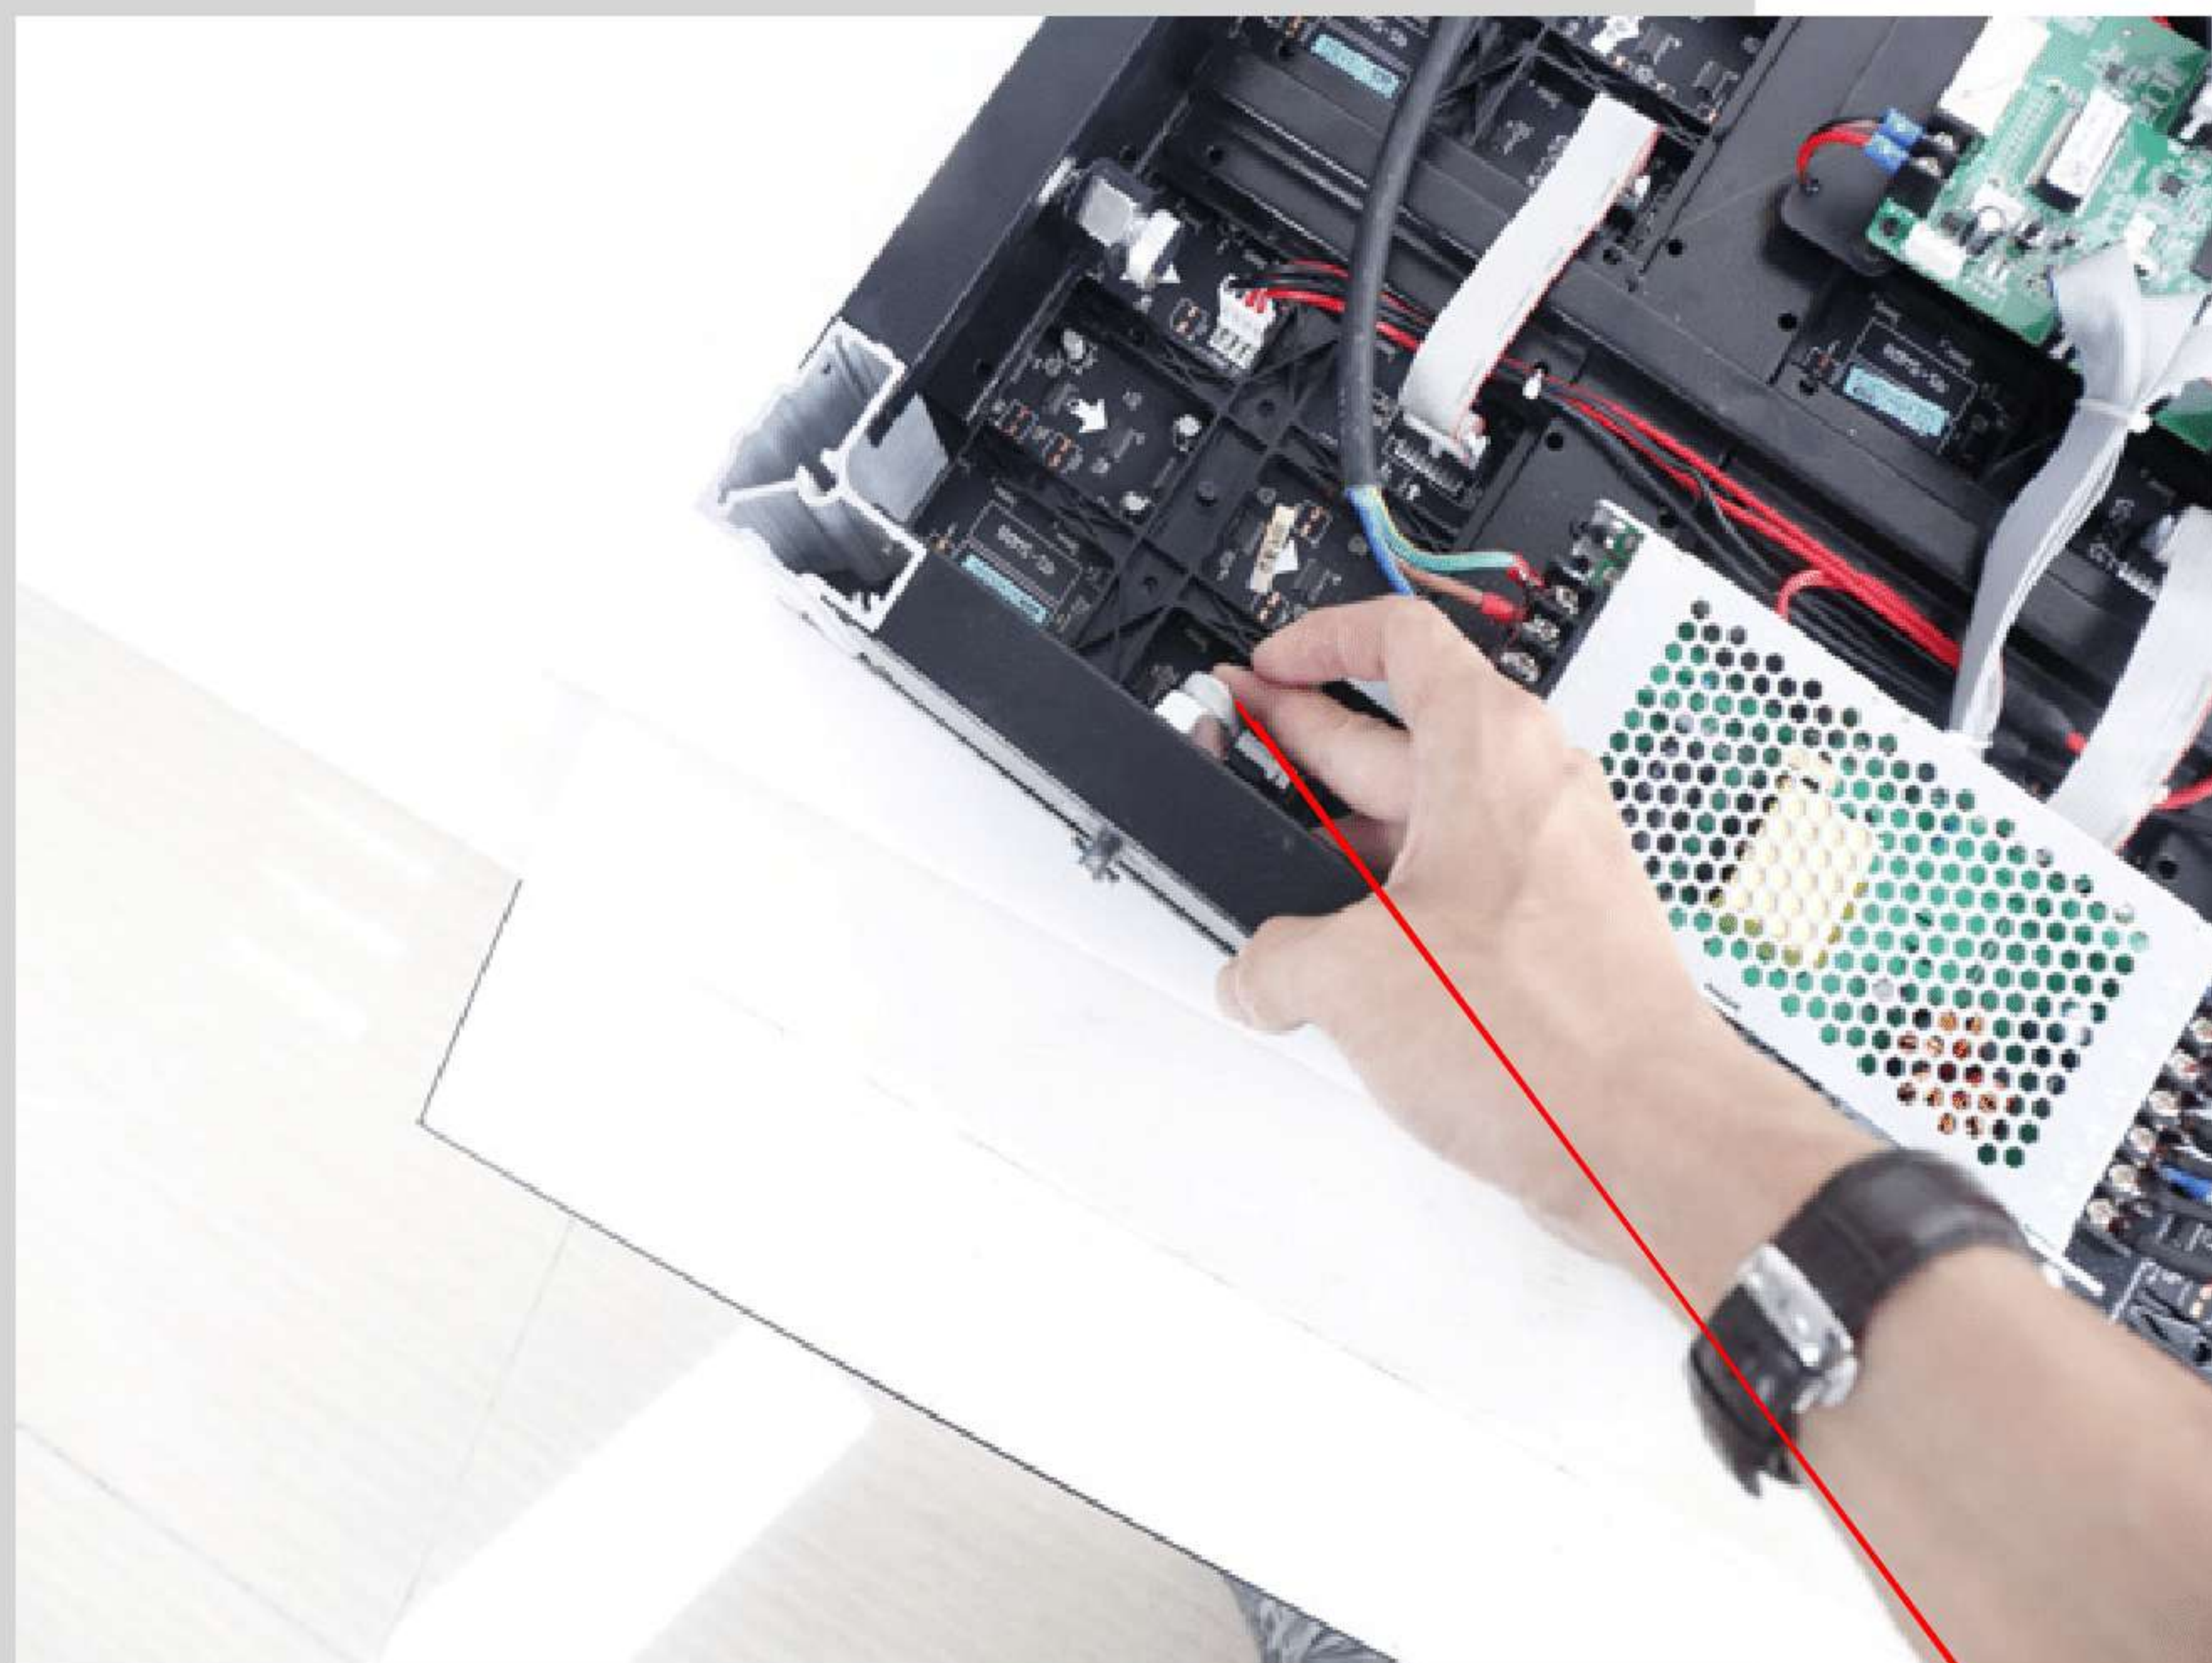

Quick installation with two locks on the upper,
lower, left, and right sides

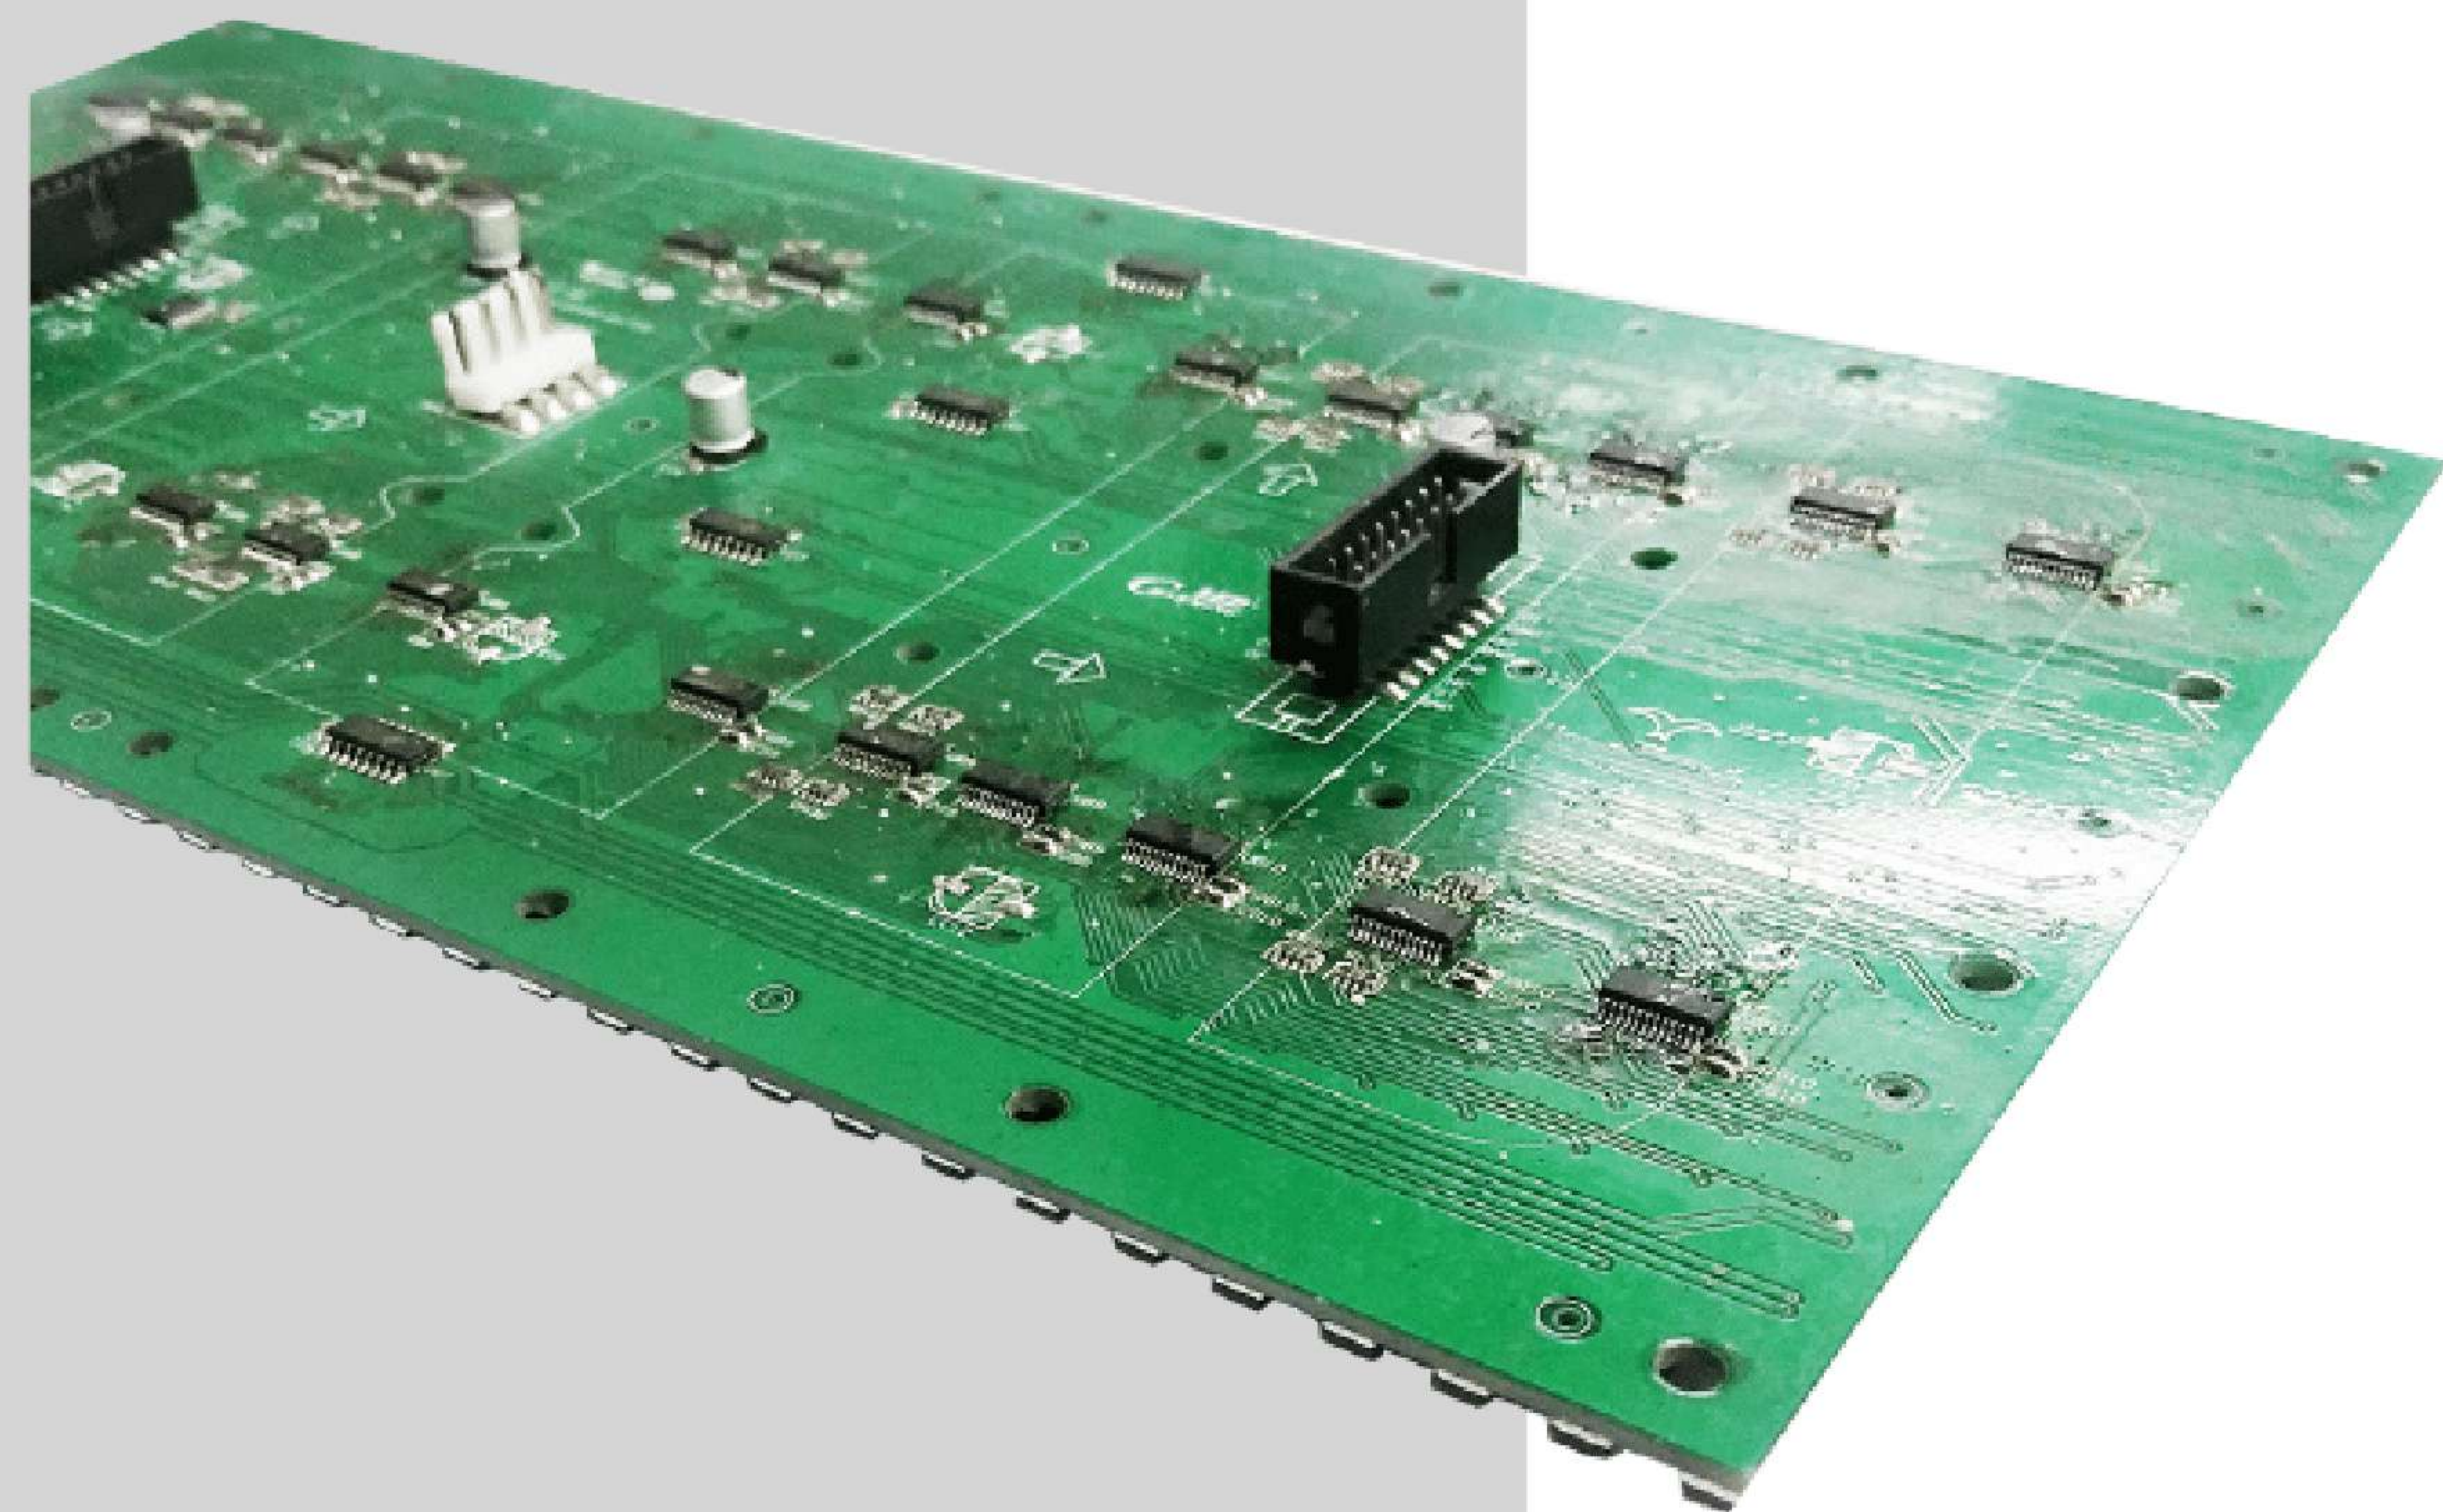

PCB Board

Painting for dustproof,
electrostatic prevention, moisture-proof



Power supply

The power supply have two solution

Solution 1

current sharing power supply


Soultion 2

common power supply

Compare with Function of Solution1 and Solution 2

Solution 1

Current sharing power supply

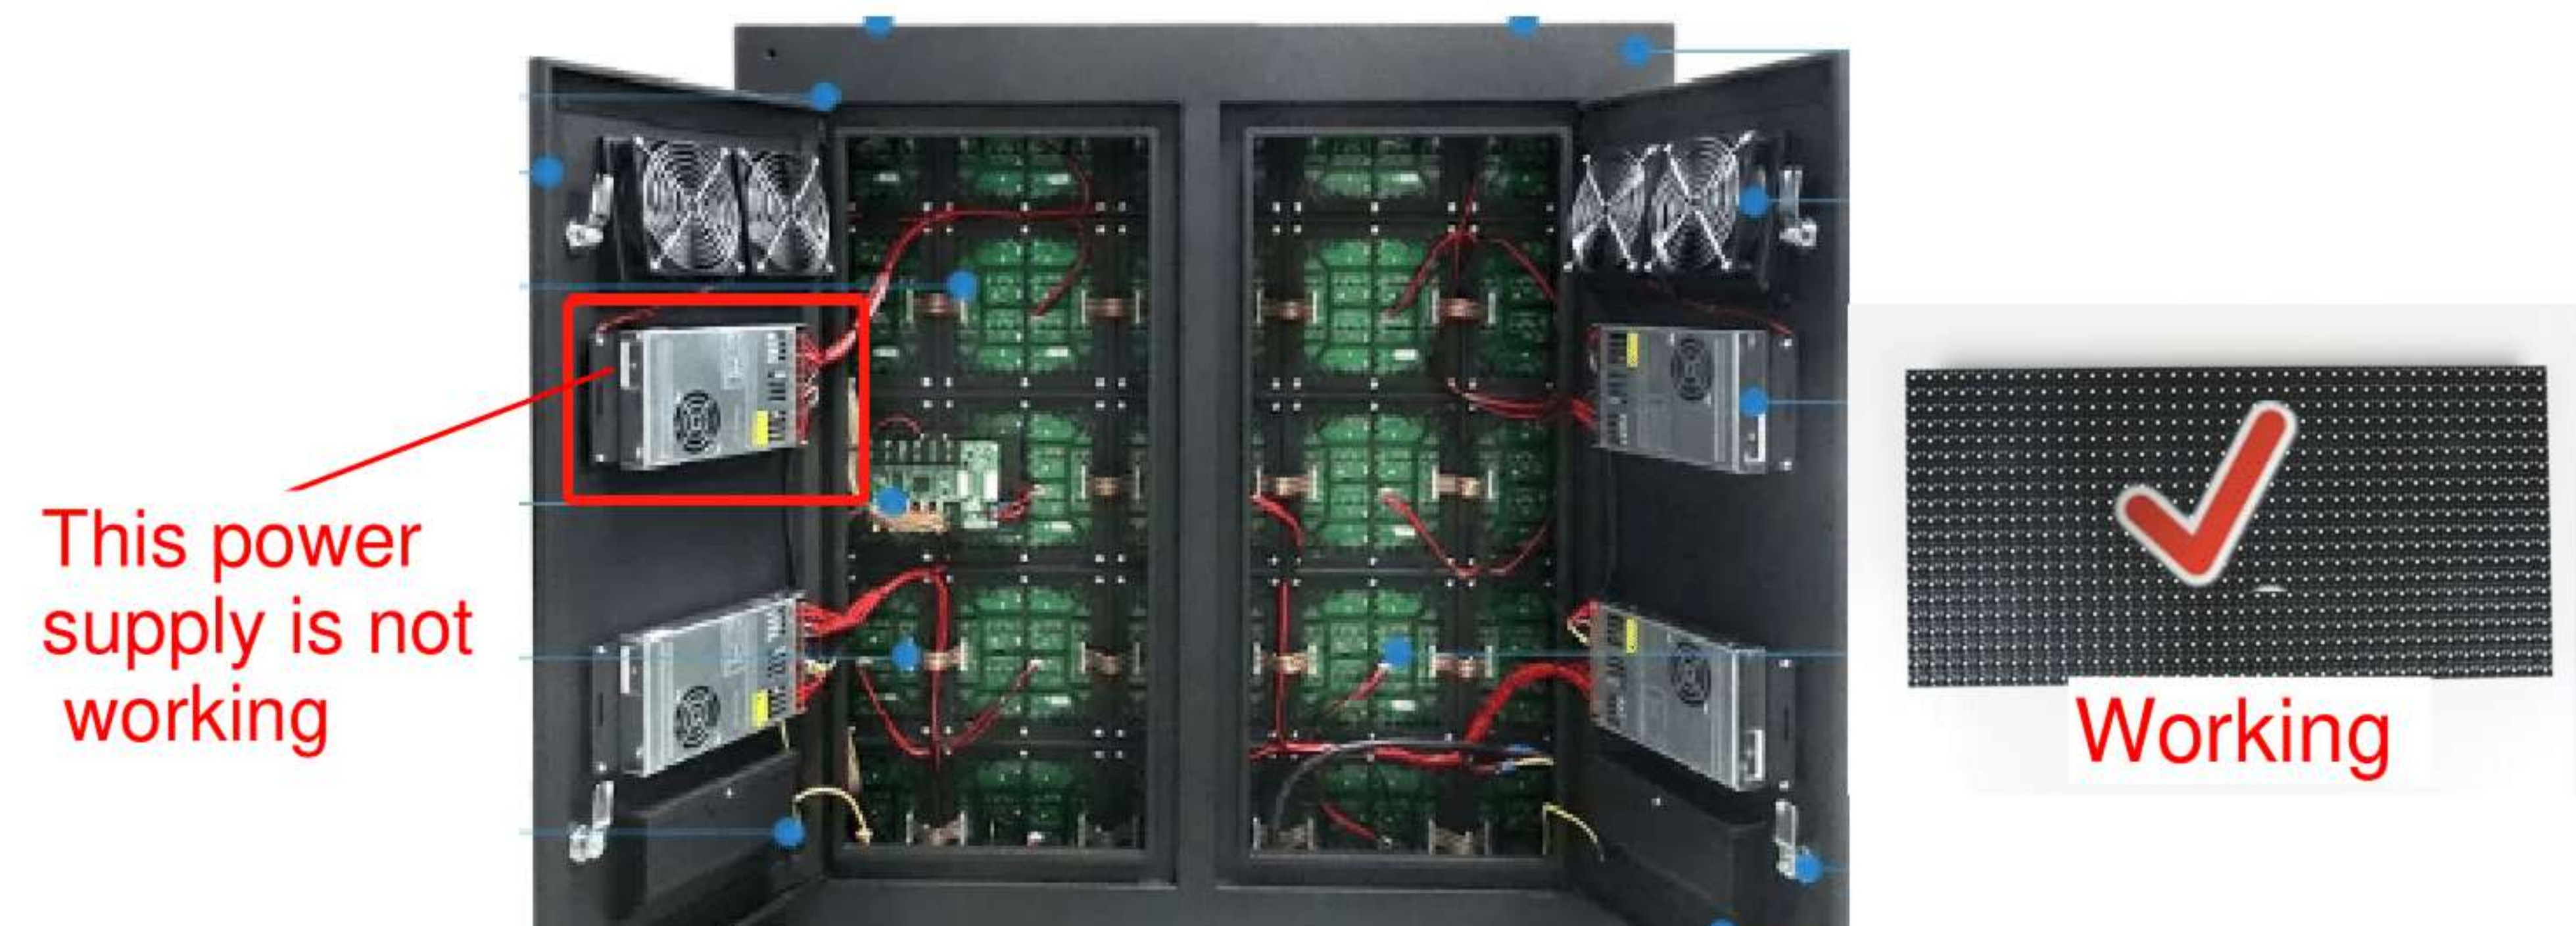

If One of the power supplies is broken, it can depend on the other two power supplies to provide power for the screen to work normally.

Solution 2

Normal power supply:



If one of power supply is bad and needs to be replaced for the power supply screen to function properly


High quality material

Made by Iron material, Fast heat dissipation, anti wear and impact resistance






Designed by retaining plate on vent
Designed by waterproof rubber strip on door
Designed by **creative shape**

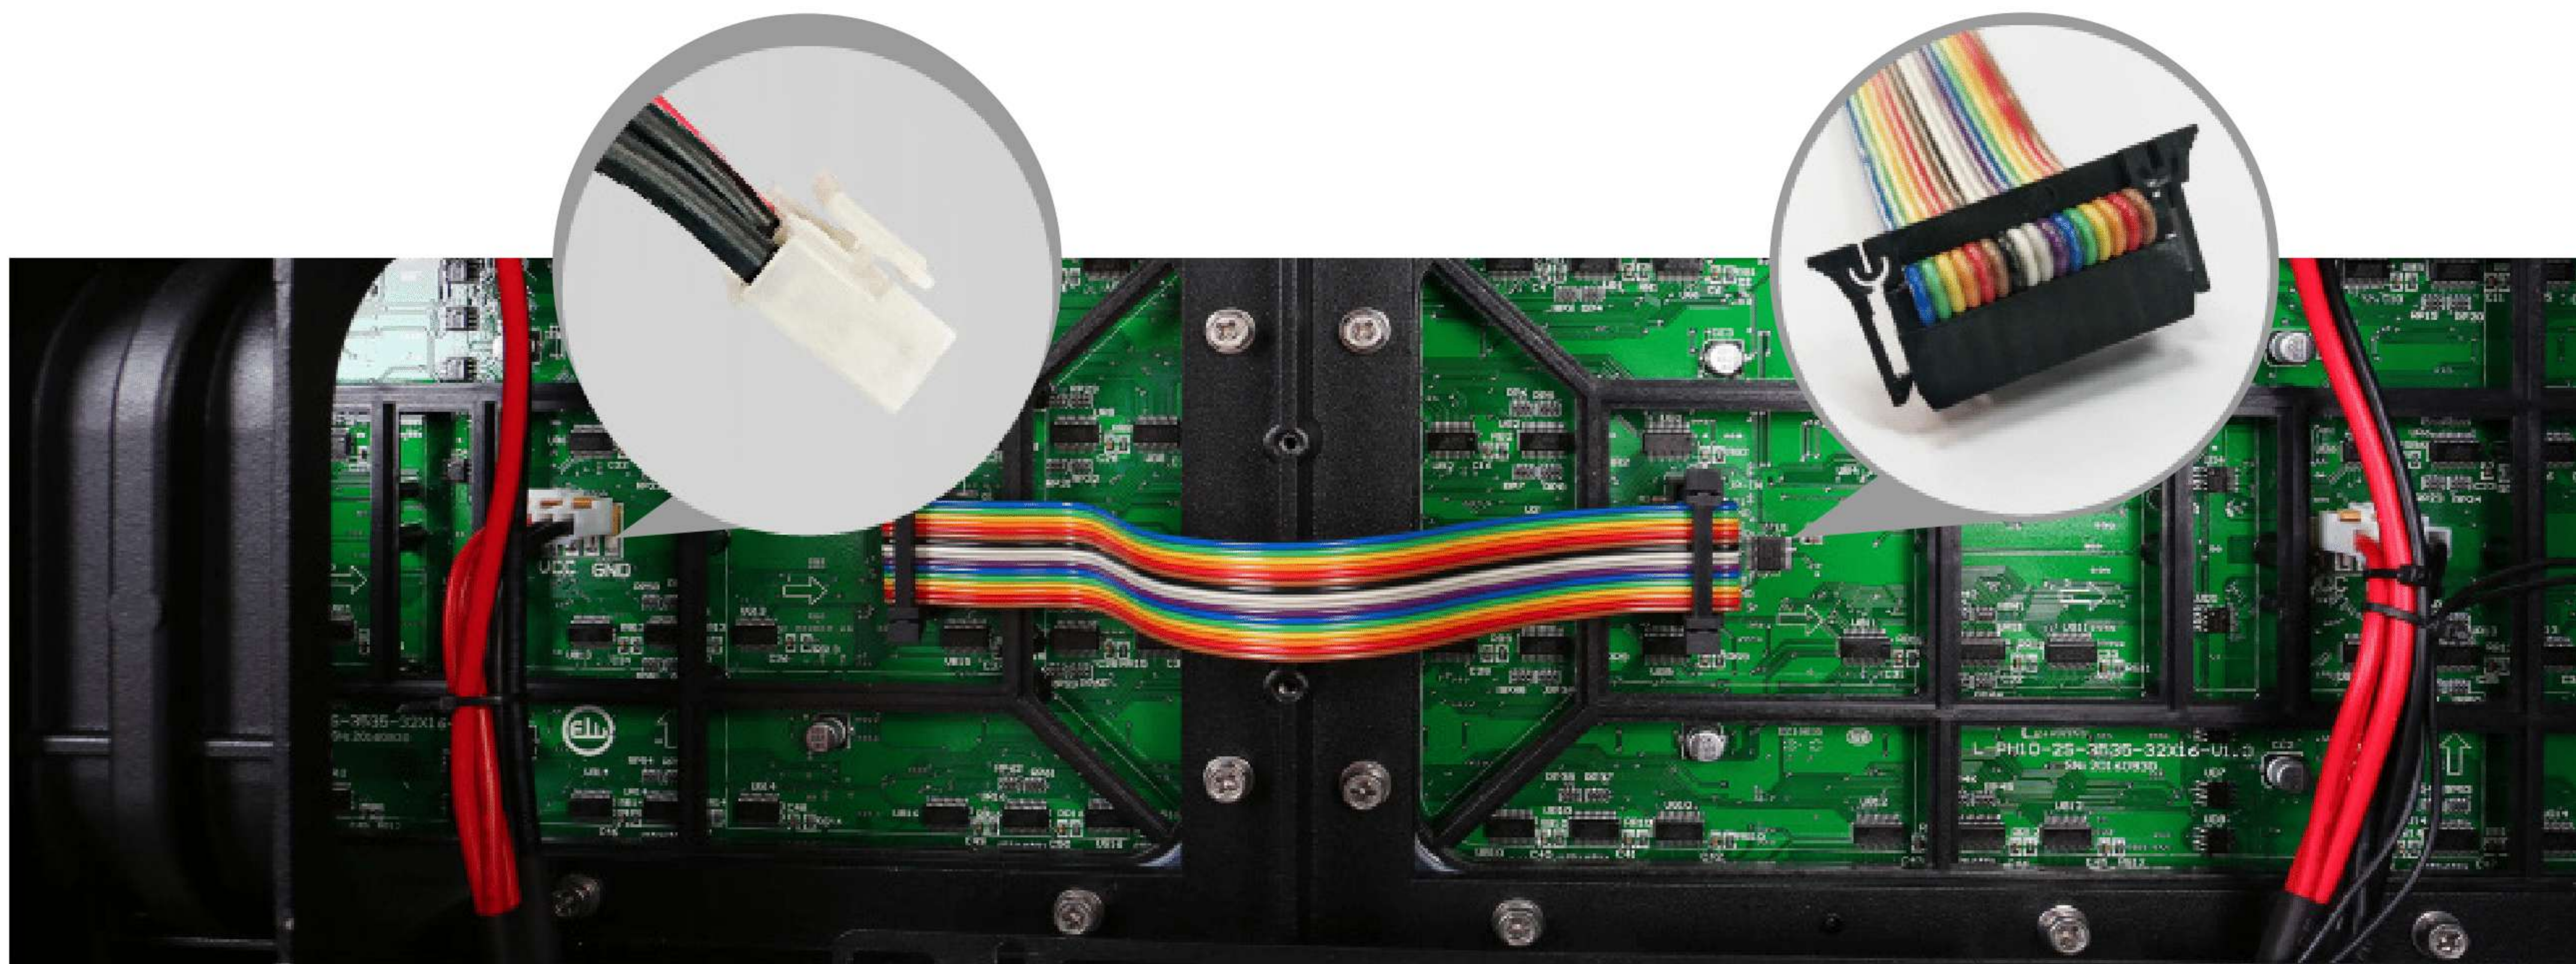

Signal cord and power cord with locker to avoid loose

Seamless splicing


seamless splicing for a better
display effect

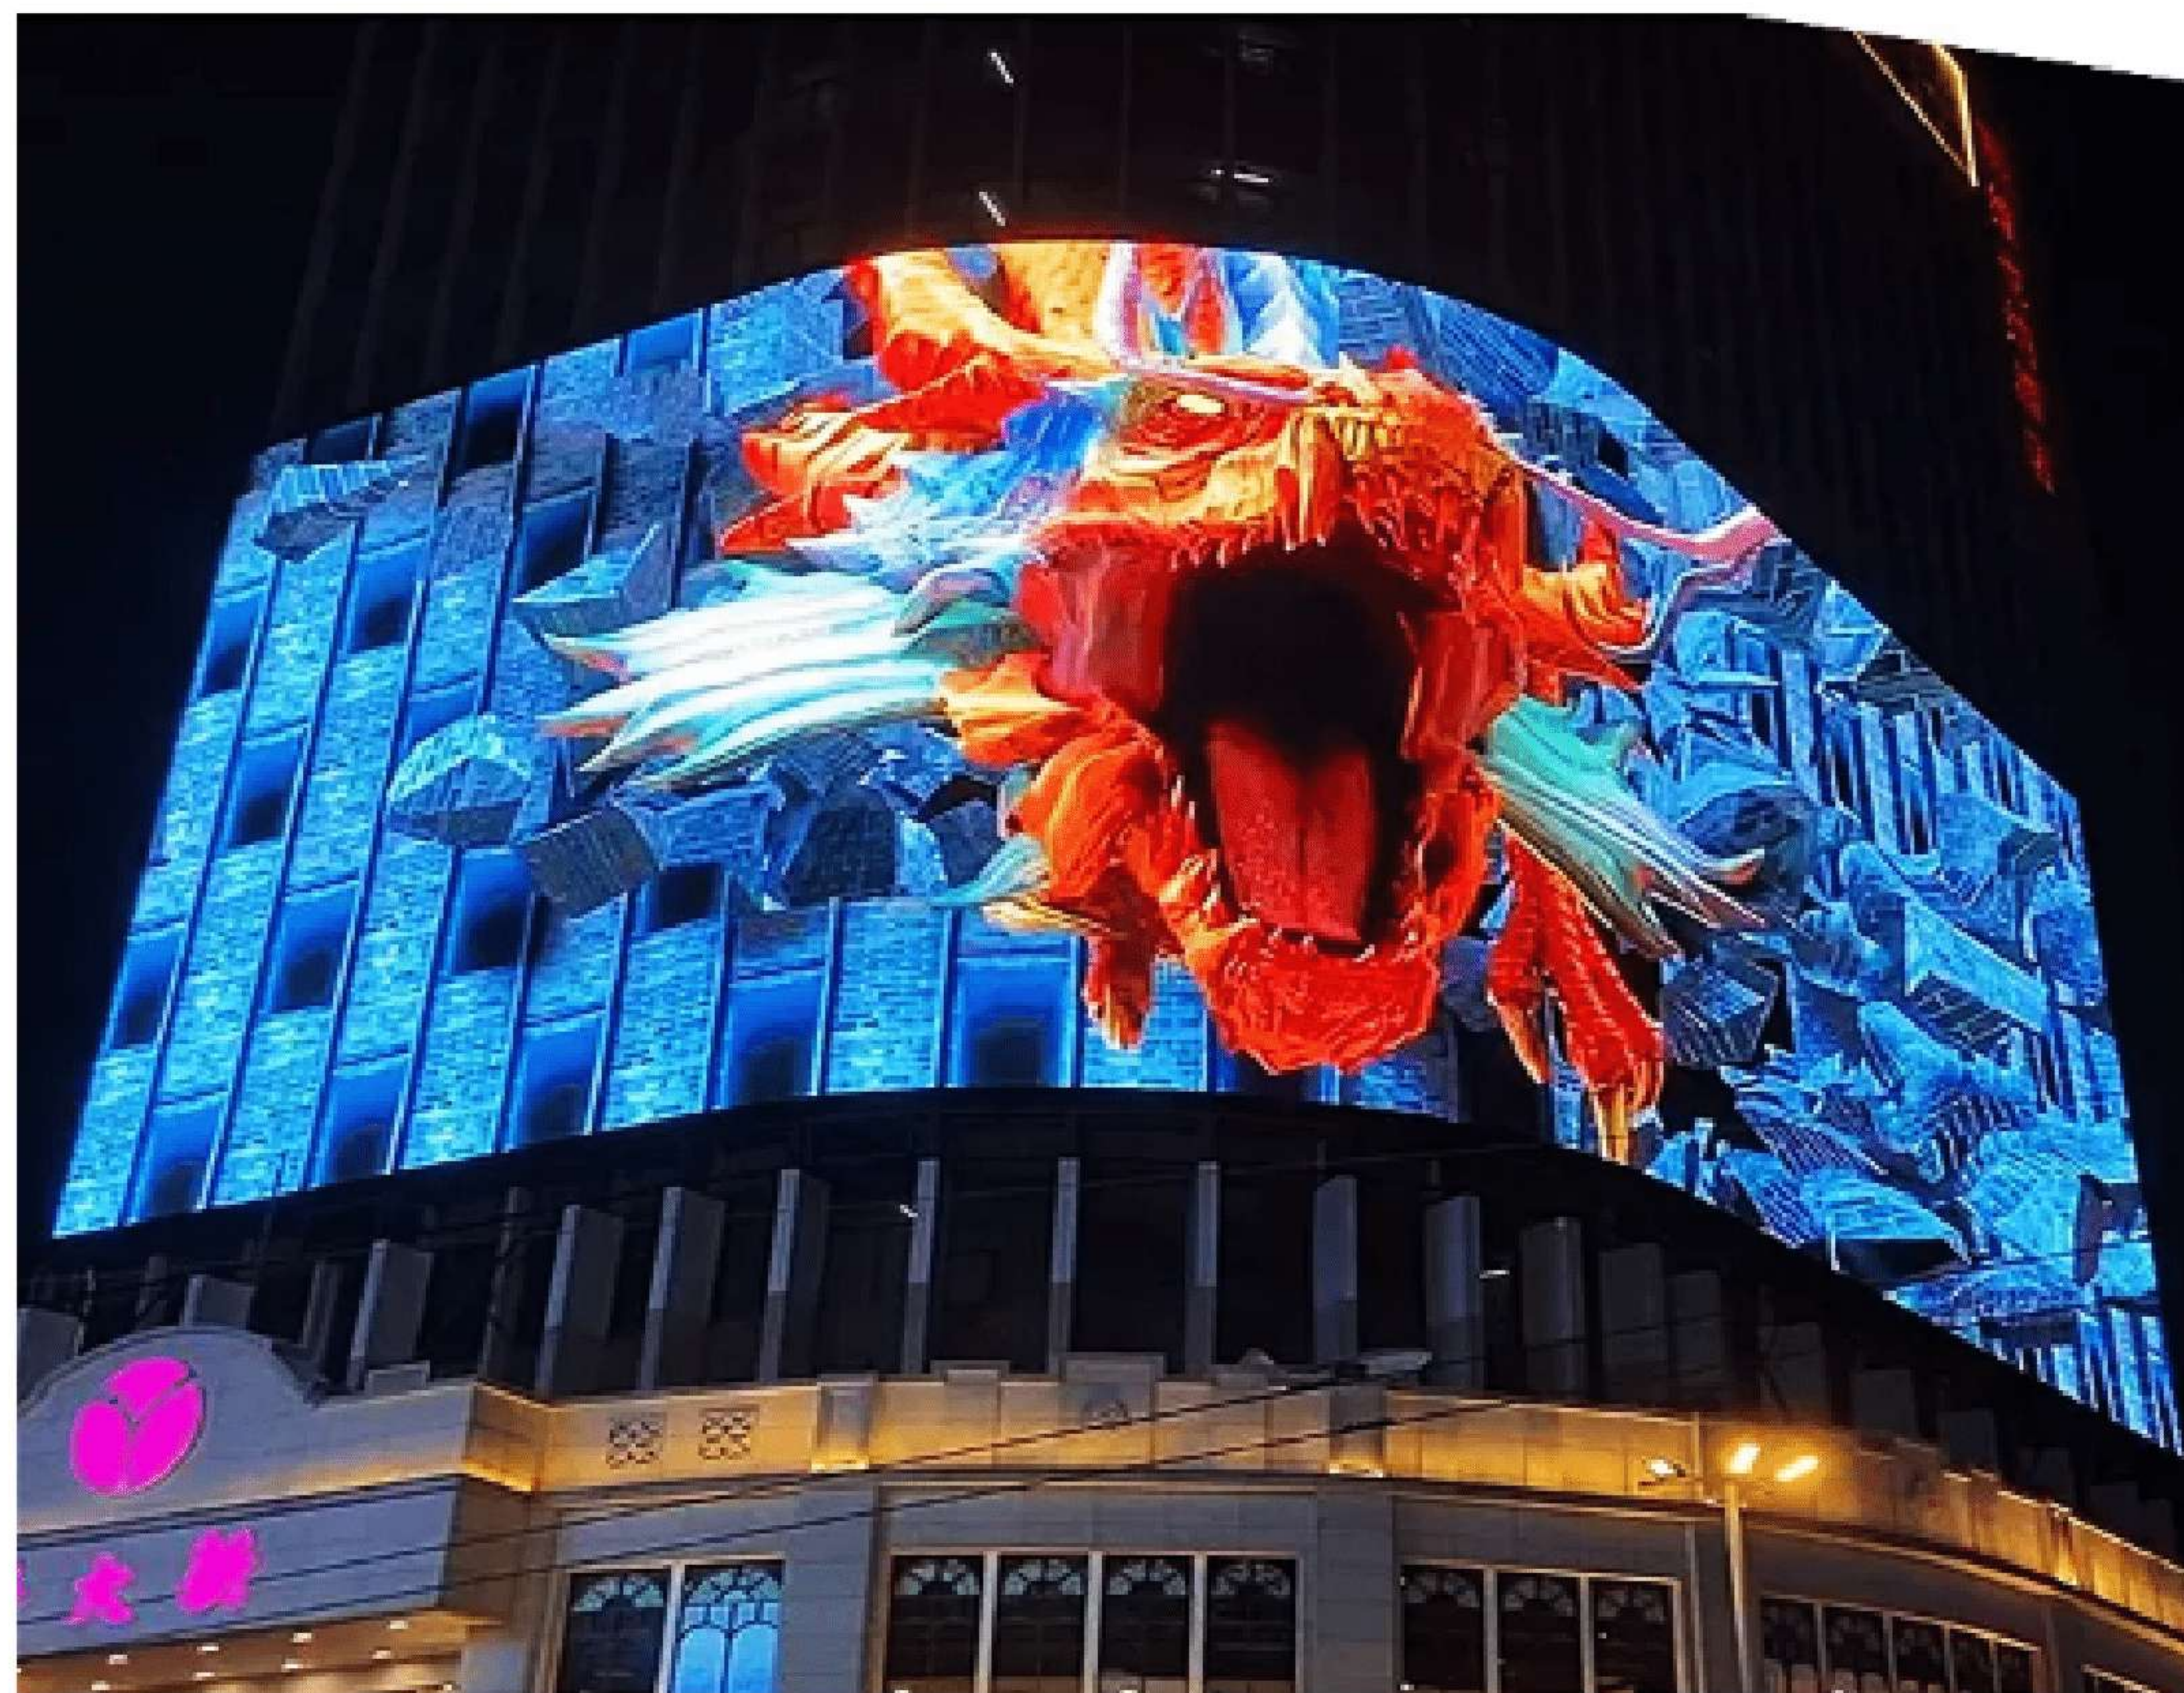



hanging bar

In addition , can be hoisting mounted with hanging bar

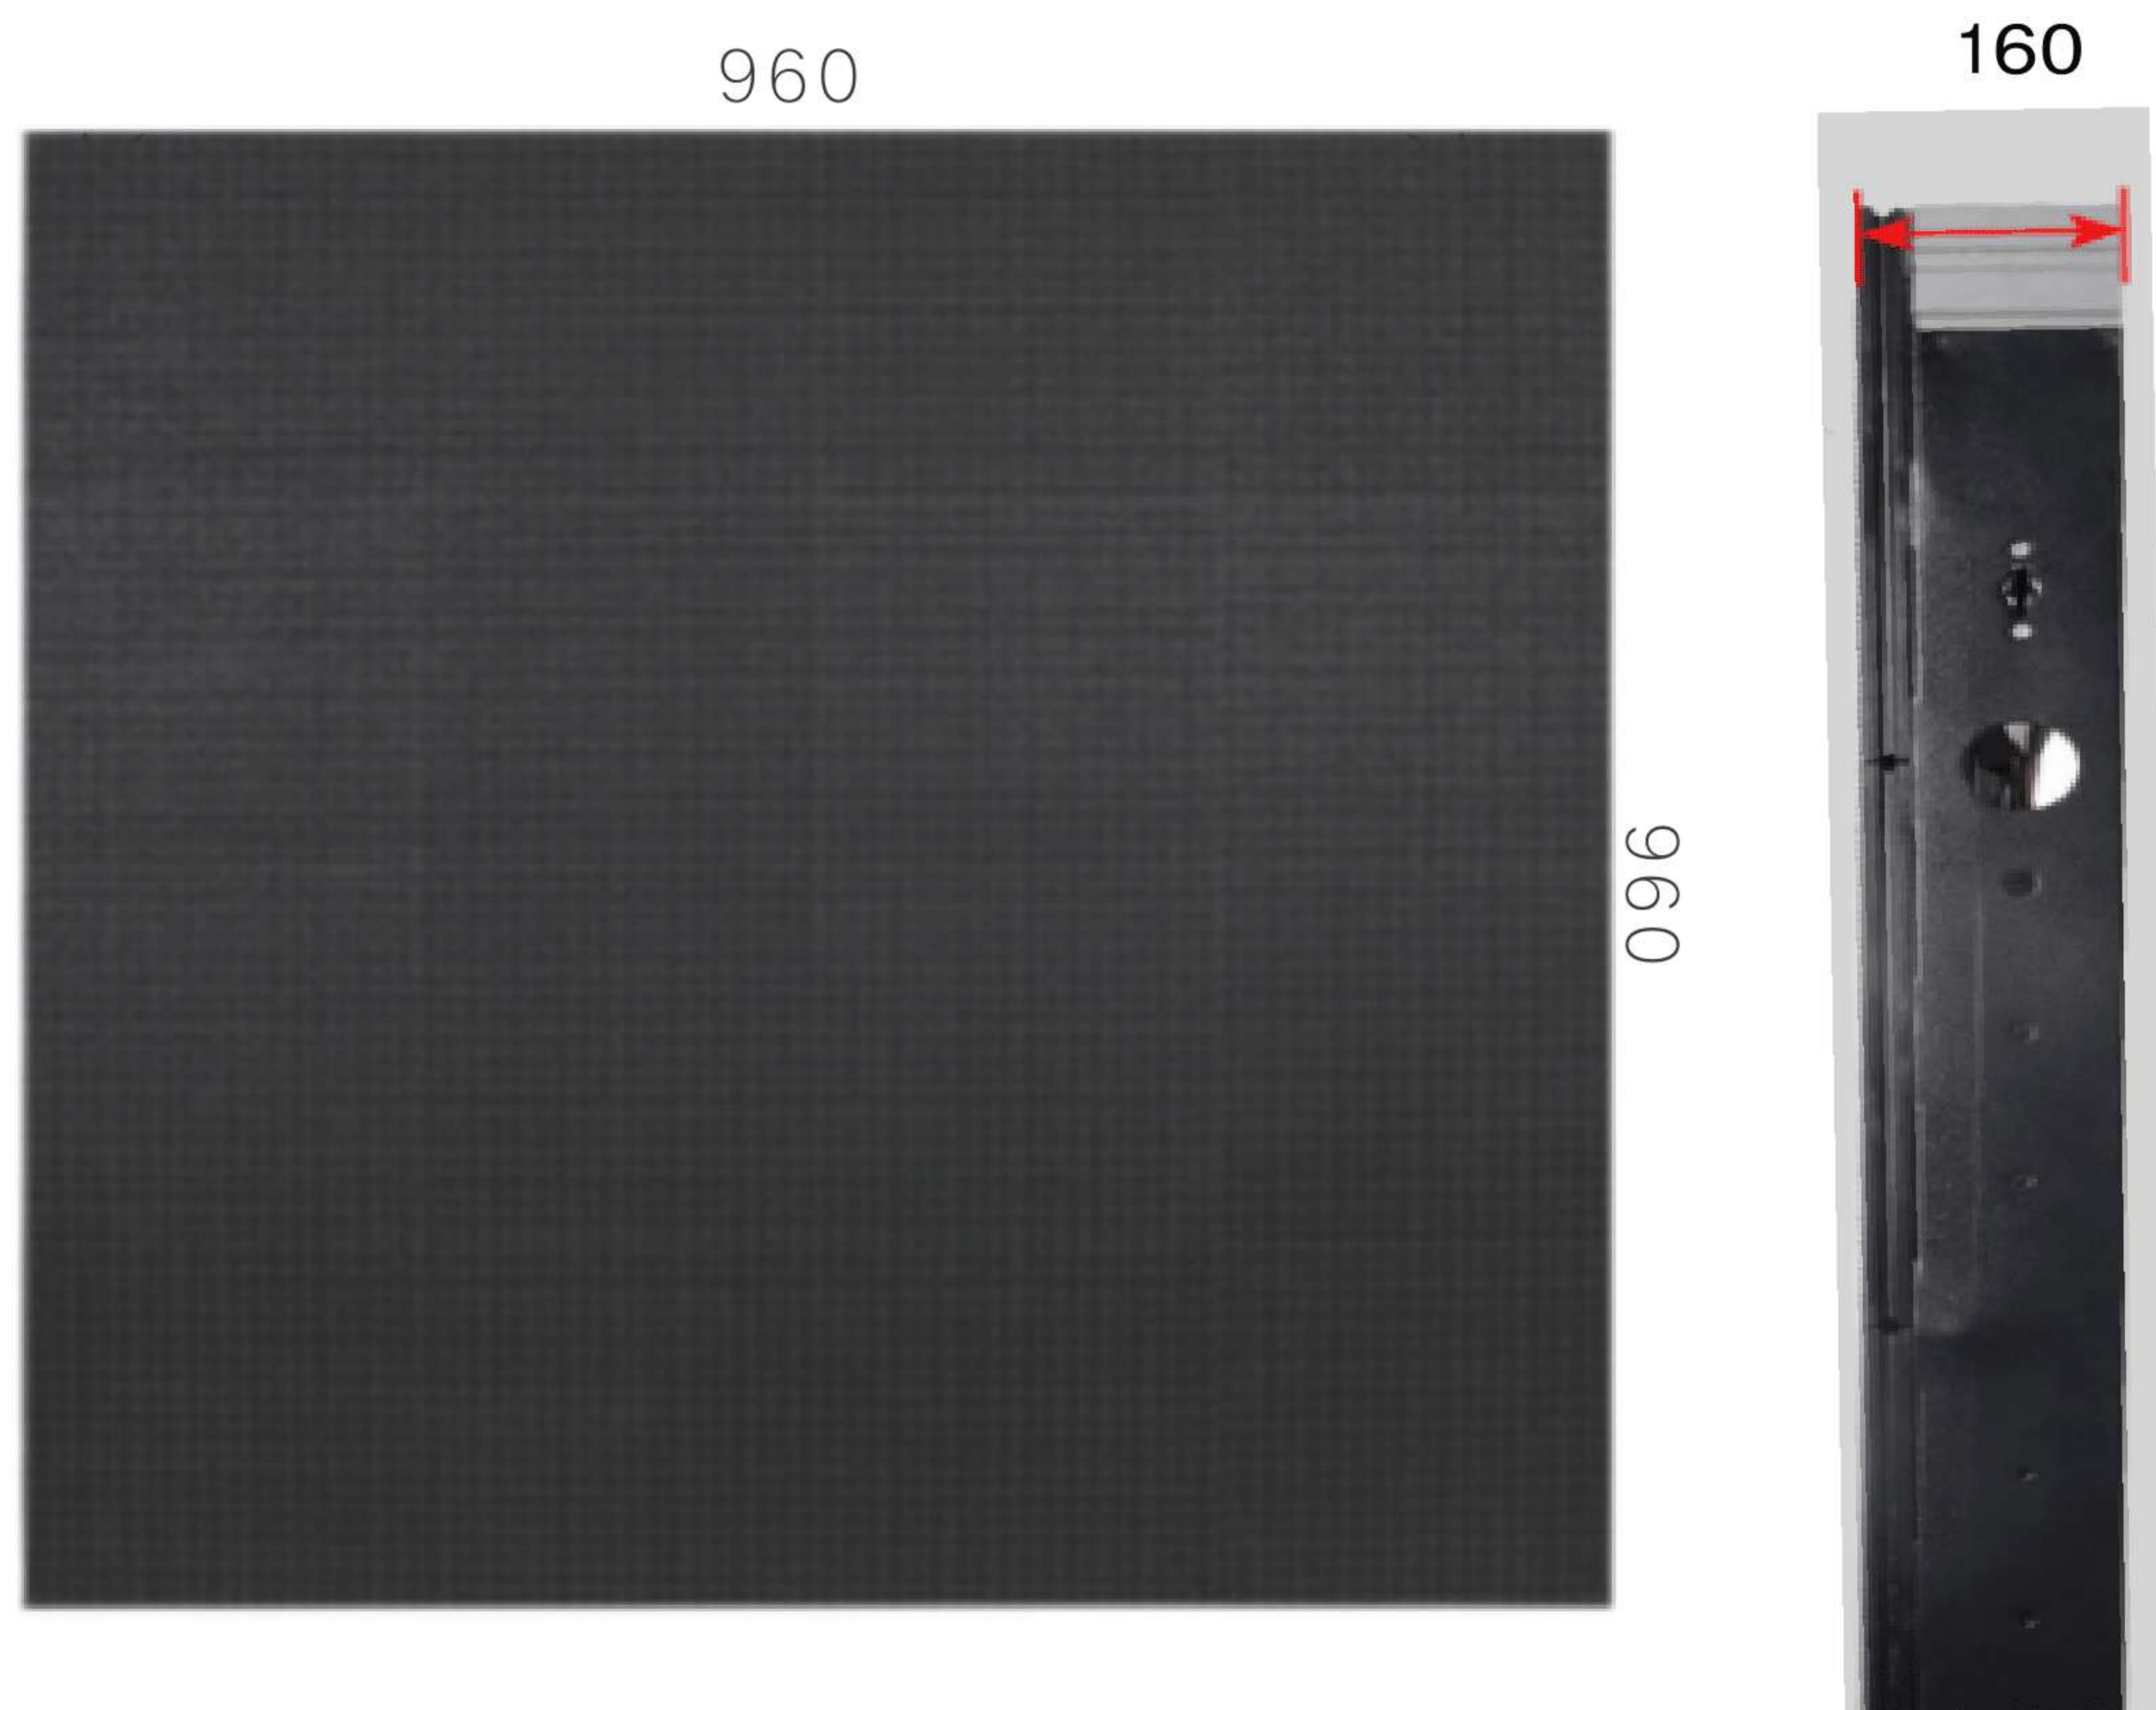


Unit : mm

型 号 Type Number	M4	M5	M666	M8
规格尺寸 Dimension(MM)	960 × 960 × 160 MM	960 × 960 × 160 MM	960 × 960 × 160 MM	960 × 960 × 160 MM
像素点间距 Pixel Pitch(MM)	4MM	5MM	6.66MM	8MM
LED规格 LED Standard	SMD2525/SMD1921	SMD2525/SMD1921	SMD3535	SMD3535
扫描模式 Scan Mode	1/10Scan	1/8Scan	1/6Scan	1/5Scan
像素密度 Pixel Density(Dot/m ²)	62500 Dot/m ²	40000 Dot/m ²	22500 Dot/m ²	15625 Dot/m ²
最大功率 Max.Power(W)	1200W	900W	900W	600W
箱体重量 Cabinet Weight(KG)	28KG	26KG	26KG	26KG
刷 新 率 Refresh Rate (Hz)	3840Hz	1920/3840Hz	1920Hz	1920/3840Hz
亮 度 Brightness (CD/m ²)	5000CD/m ²			
可视角度 Viewing Angle	130 °			
防护等级 Protection Level	IP65			
箱体材质 Cabinet Material	Iron cabinet			
维护方式 Maintenance Method	Back Maintenance			
灰度等级 Grey Level	16 Bit			
工作温度 Working Temperature	-20~60℃			
工作湿度 Working humidity	10%-90%RH			
使用寿命 Life Span	≥100000 Hours			
工作电压 Working Voltage	AC 110V/220V,50/60HZ			



CHARMINGLED PROJECT CASE

ILLUMINATE YOUR WORLD

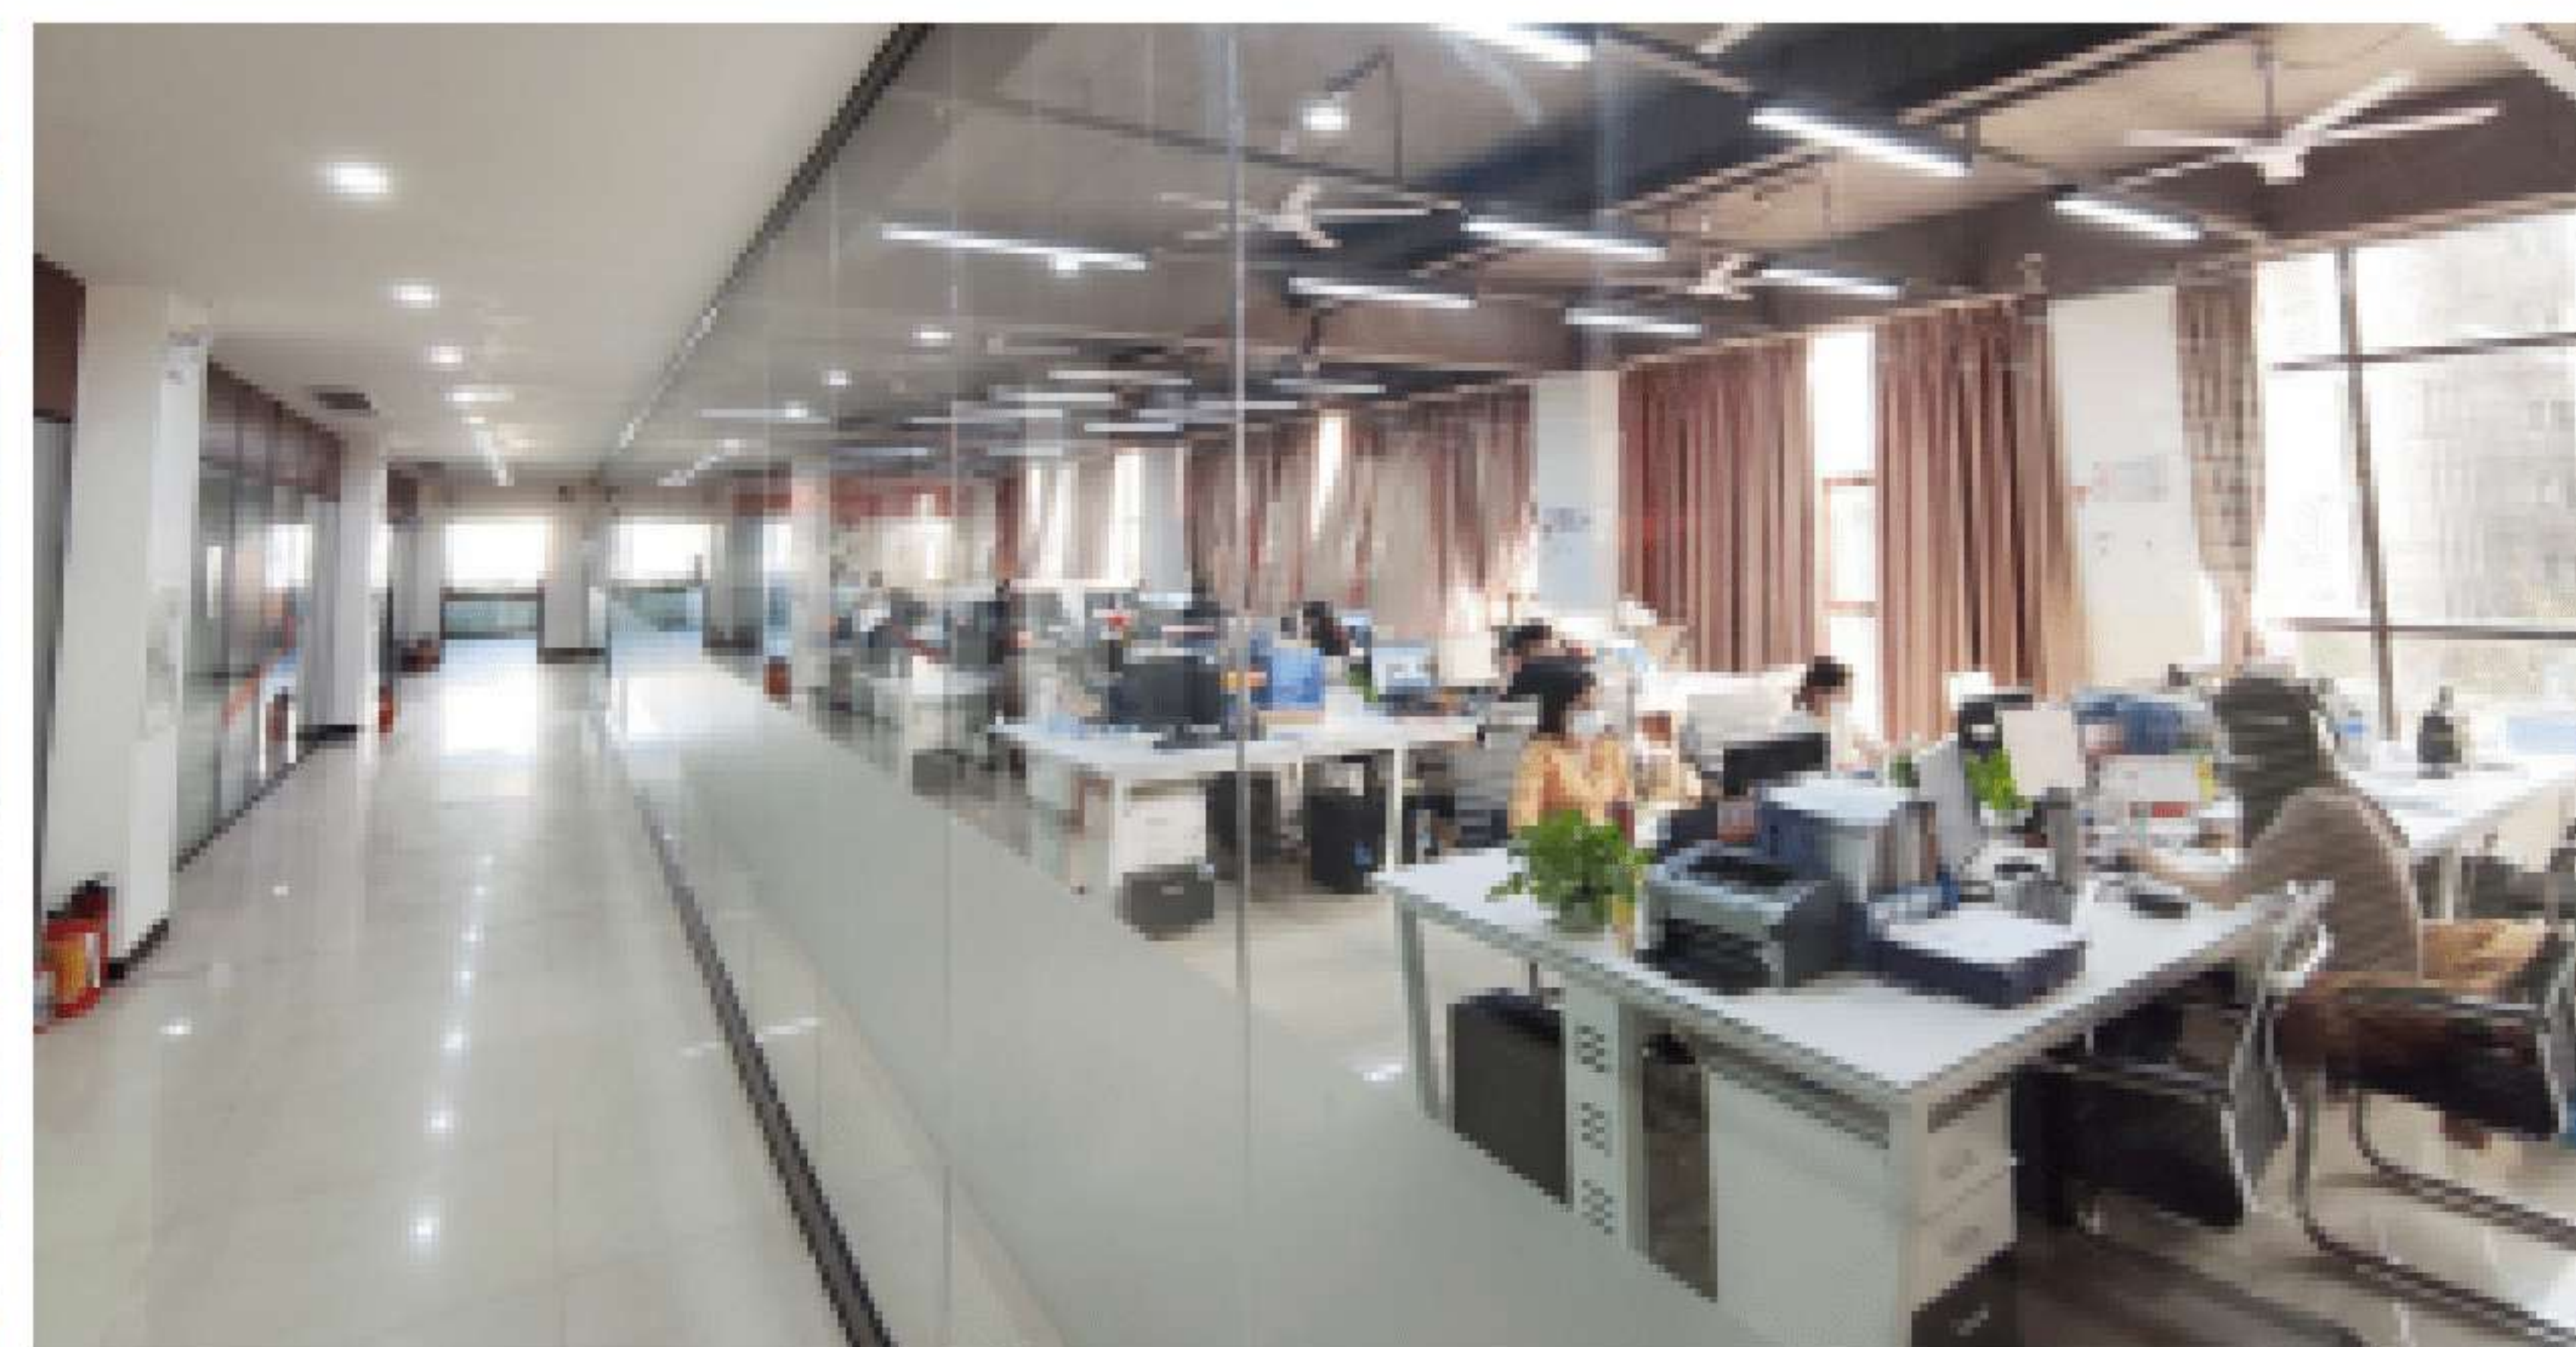

ILLUMINATE YOUR WORLD

CERTIFICATE

CE, RoHS, BIS, CB, IECEE ISO9001:2008 Certified



More than 20,000 successful projects / 130 patents

— OFFICIAL PARTNERS —

(LISTED COMPANIES)



CARGO SHIPPING

Frequent destinations including: More than 150 countries,
More than 20,000 customers (USA, Mexico, Spain,
Germany, France, UK, Saudi Arabia, UAE, India, Indonesia, Australia etc.)



Accept different shipping terms, such as EXW, FOB, CFR, CIF, DDU and DDP, plenty of shipping resources are available to make you rest-assured of shipping.


PRODUCTION PROCESS DIAGRAW

生产工艺示意图




PRODUCTION PROCESS DIAGRAM

生产工艺示意图

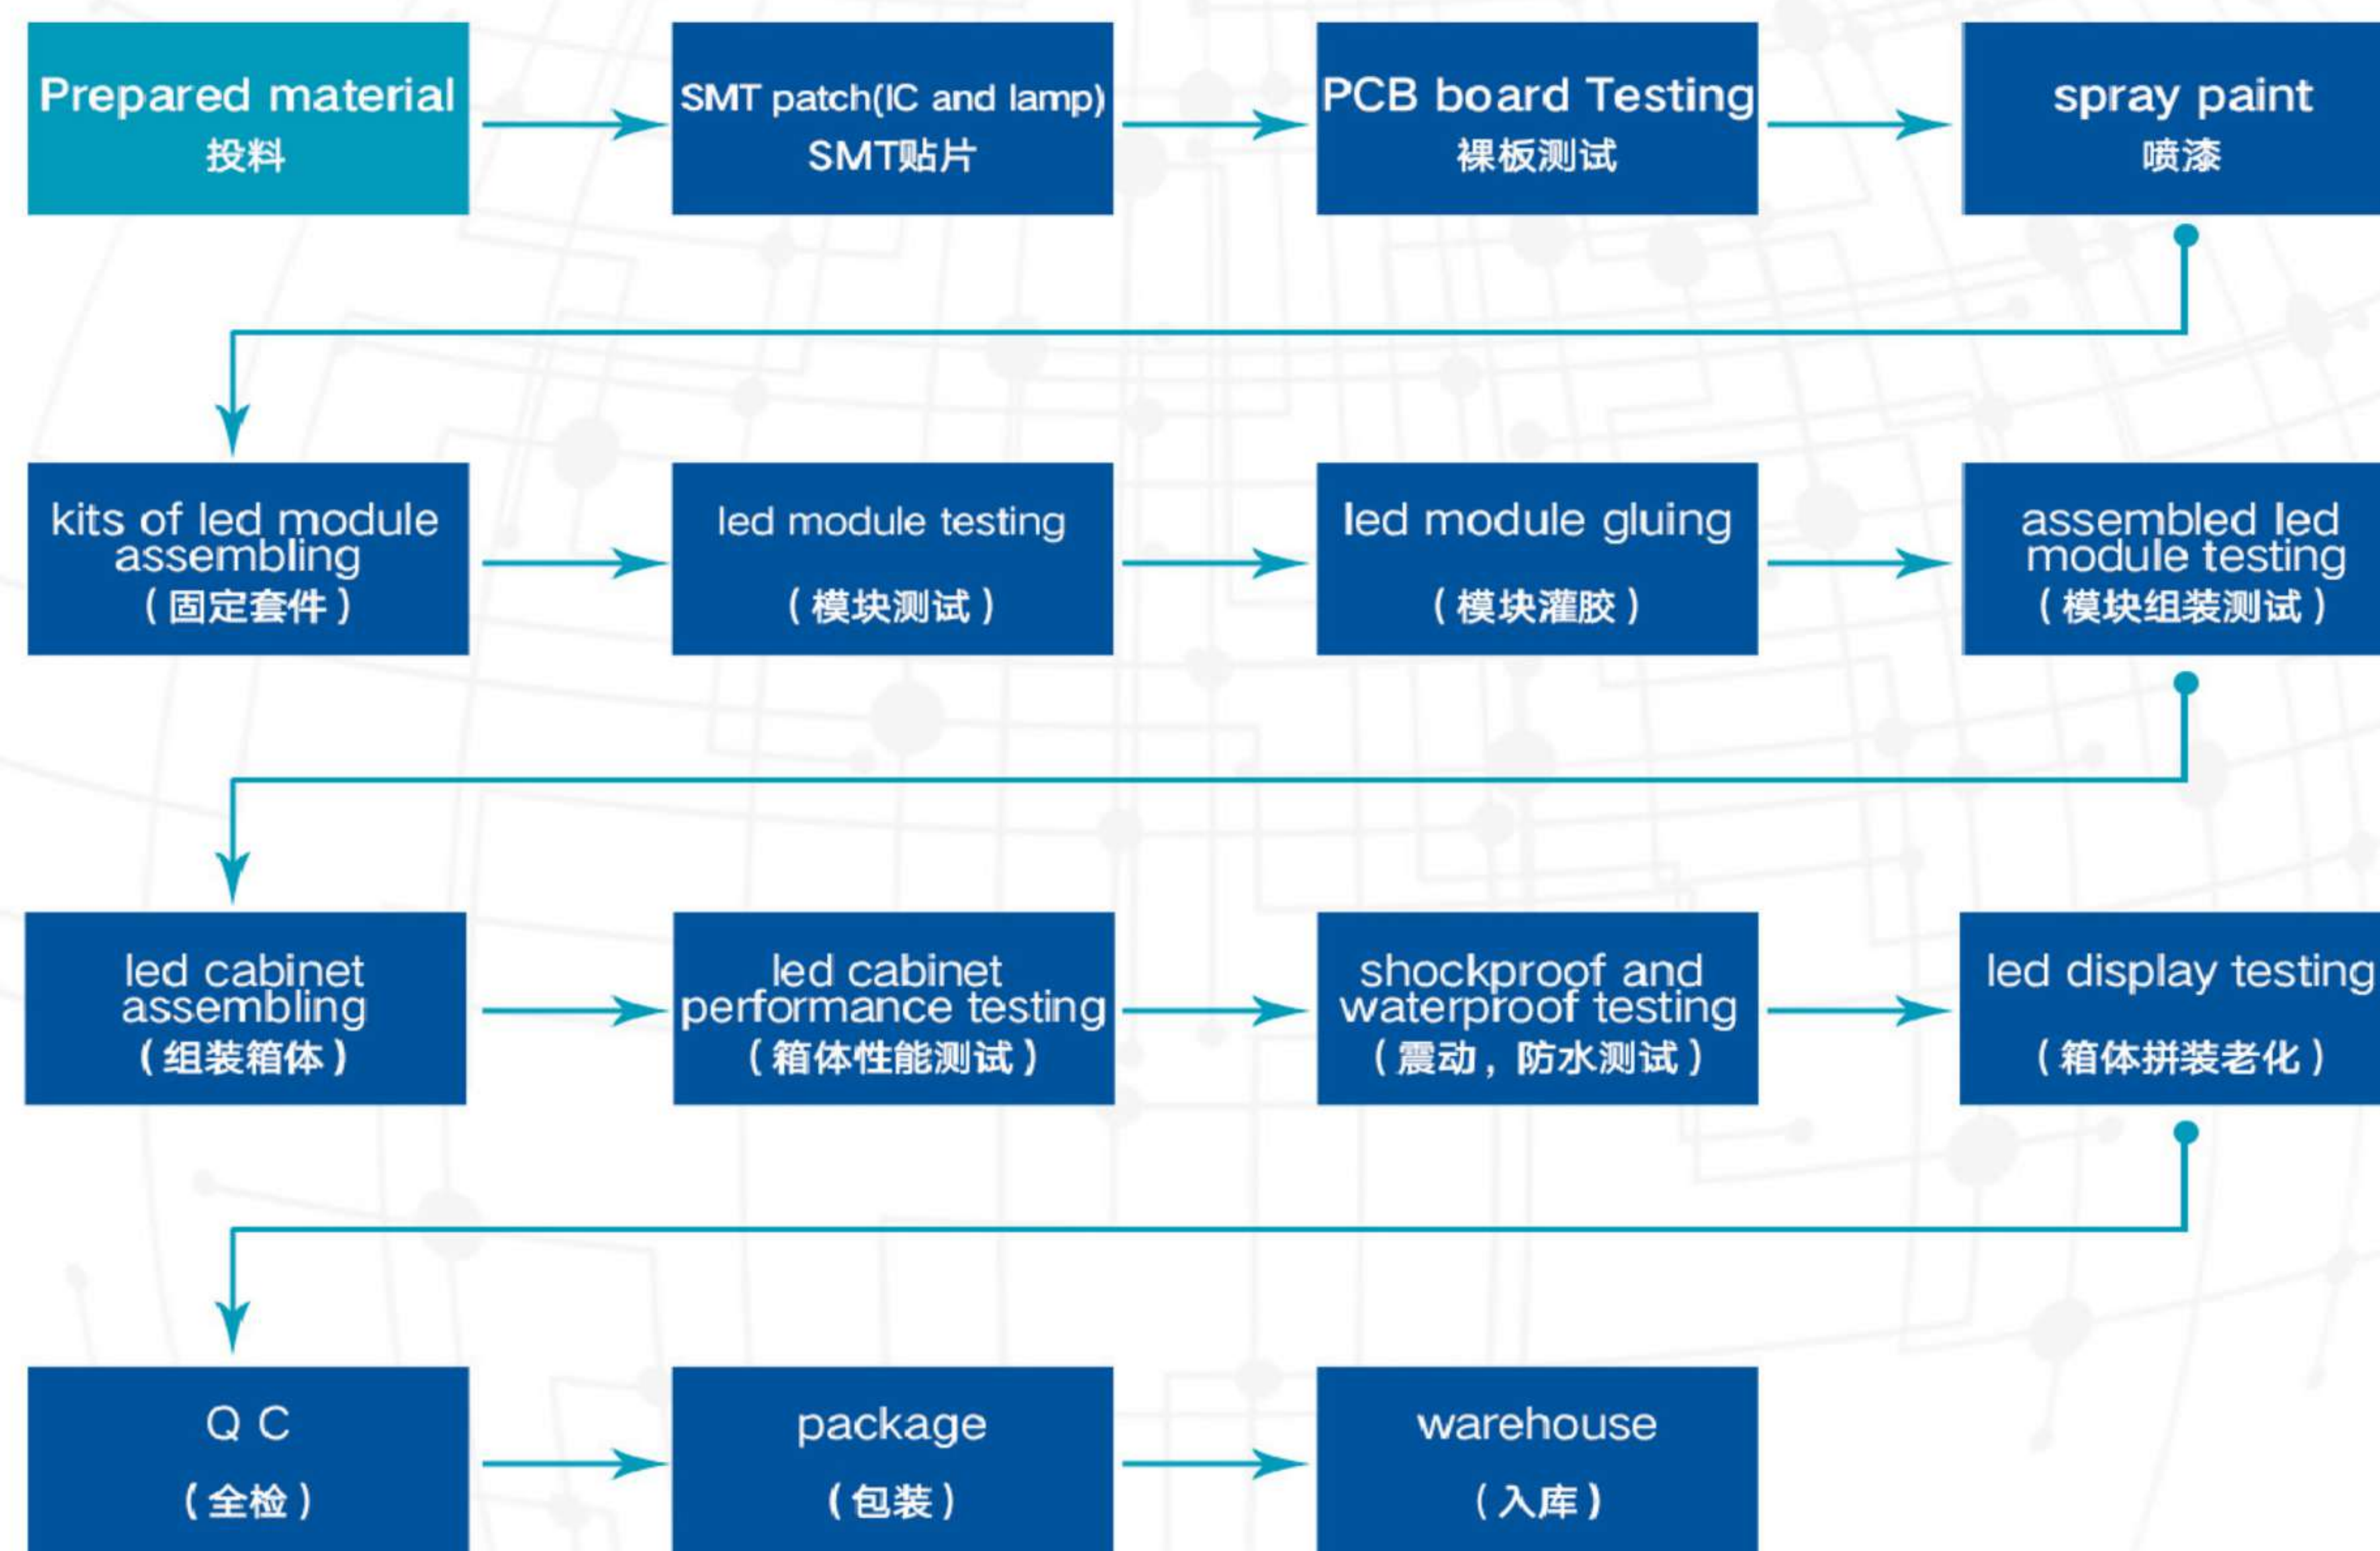

SCREEN LINE CONNECTION DIAGRAM

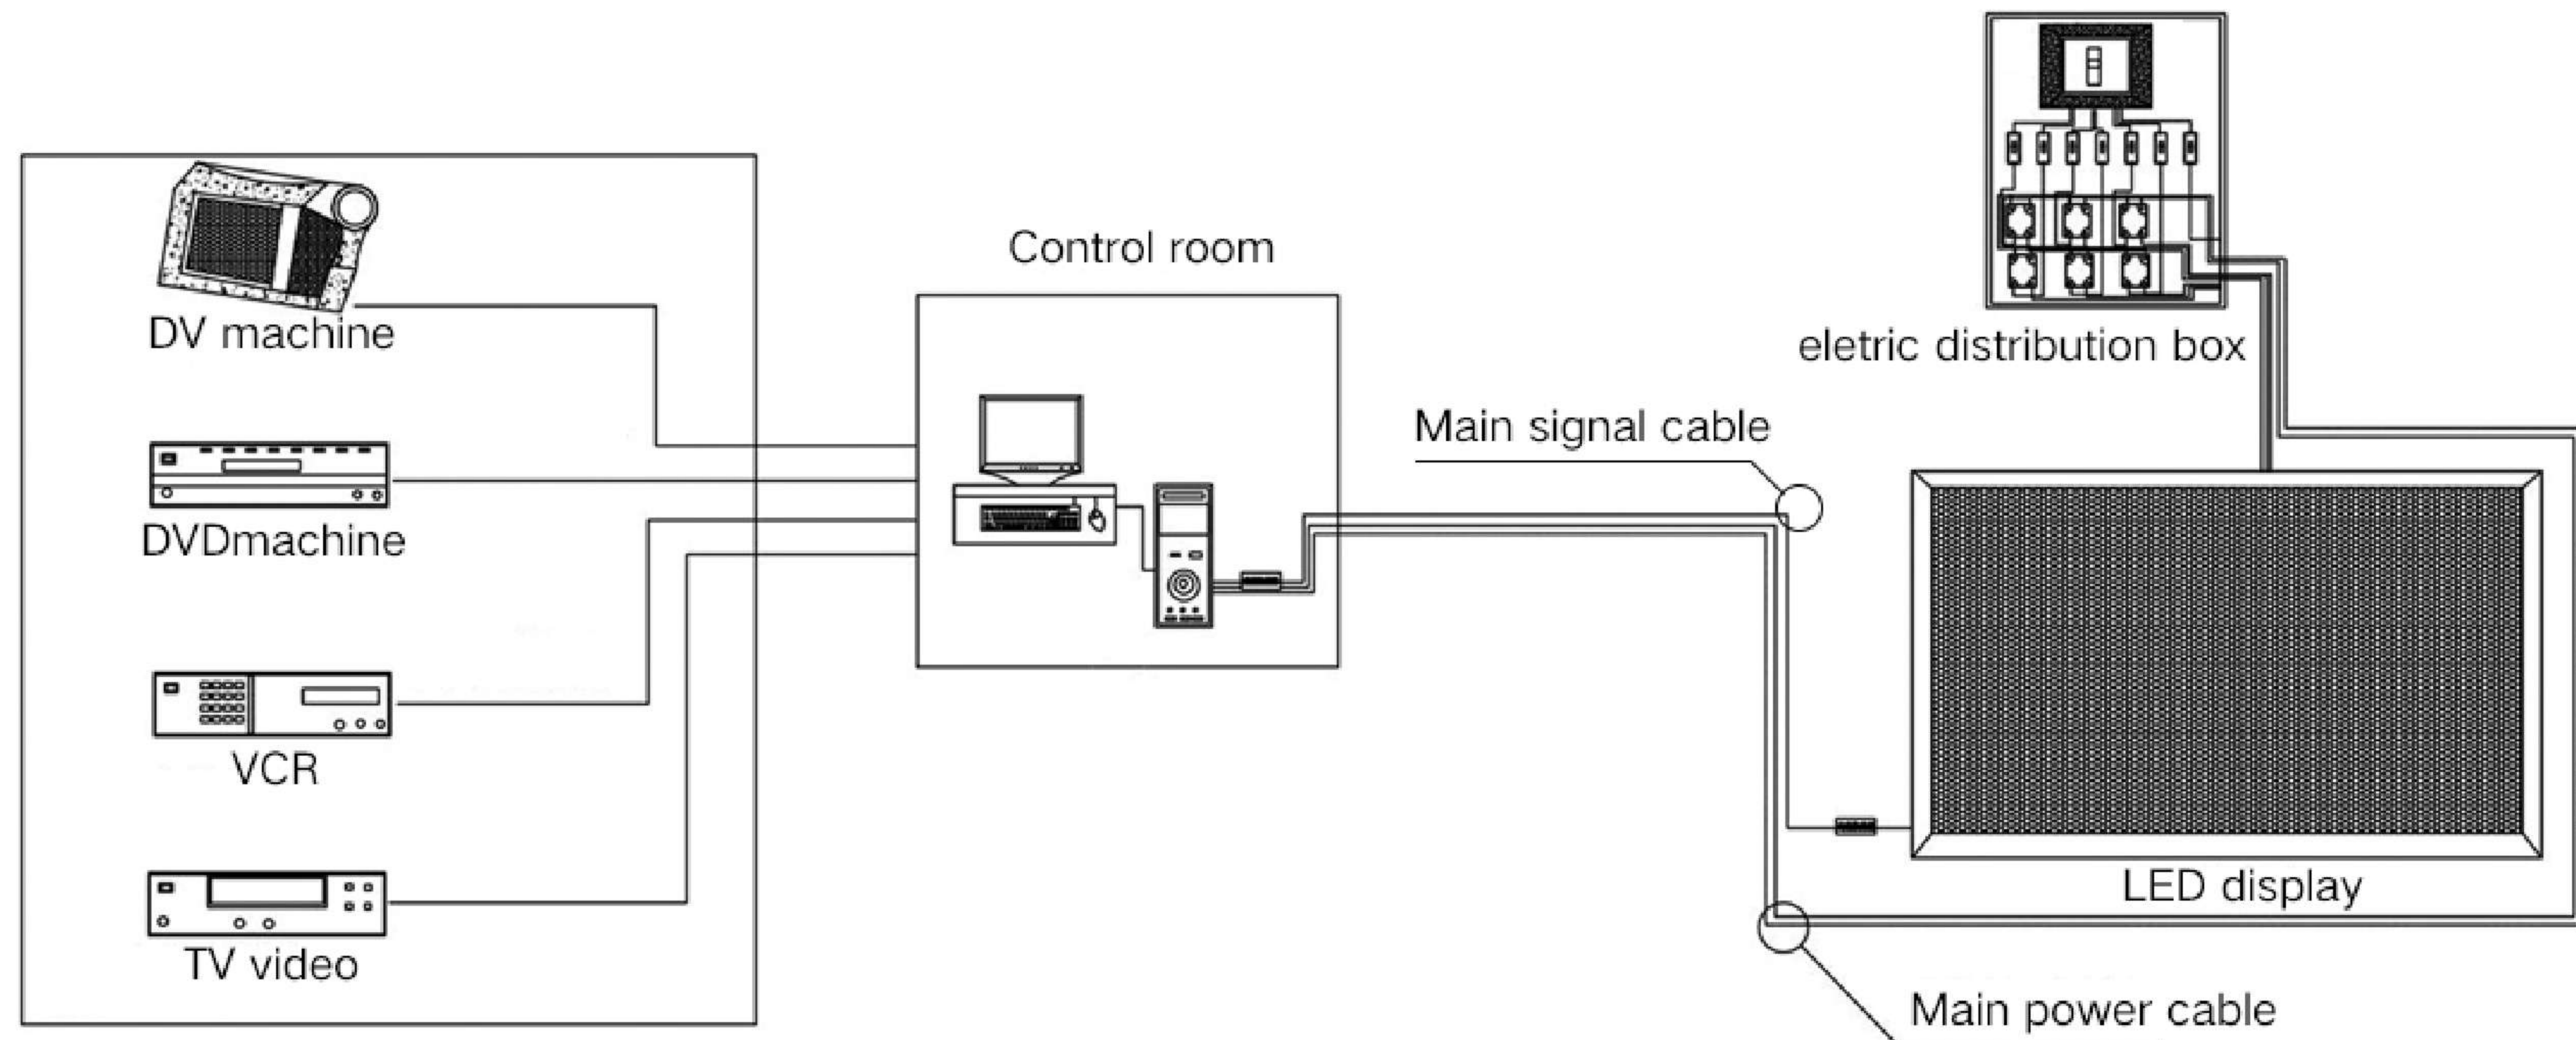

THE EXHIBITION SHOW

GET SHOW 、PROSOUND + LIGHT 、ISE 、INFOCOMM



THE COMPANY SHOWS



Headquarters
building



Charming Co.,Ltd



Guangzhou Charming
Lighting Co.,Ltd



C&e Tech Usa Inc



Madrix China

PRODUCT PACKAGING

According to the different packing patterns of different products, wooden case packing , flight case packing.



Wooden case packing



Flight case packing

CREATE A MORE BEAUTIFUL VISUAL FEAST FOR THE WORLD



CHARMING CO.LTD

Address: Guangdong Foshan - Nanhai Charming Headquarters

WWW.CHARMINGLED.NET



FORTIS TECH CO.LTD

Address: A-01, Gomes Industrial Estate, Andheri East, Mumbai

WWW.FORTISTECH.IN

