

Outdoor simple iron cabinet

P3.91 Outdoor Display

CHARMING CO.,LTD

WWW.CHARMINGLED.NET

- SINCE 2003 -

I L L U M I N A T E Y O U R W O R L D



Outdoor simple iron cabinet

P3.91 Outdoor Display

Pre installation maintenance

500×500/500×1000×85mm

ILLUMINATE YOUR WORLD





RGB



HD Display



Seamless Splicing



Pre maintenance



Split Structure
Design



energy
conservation





Silent operation



Wide angle display



IP65

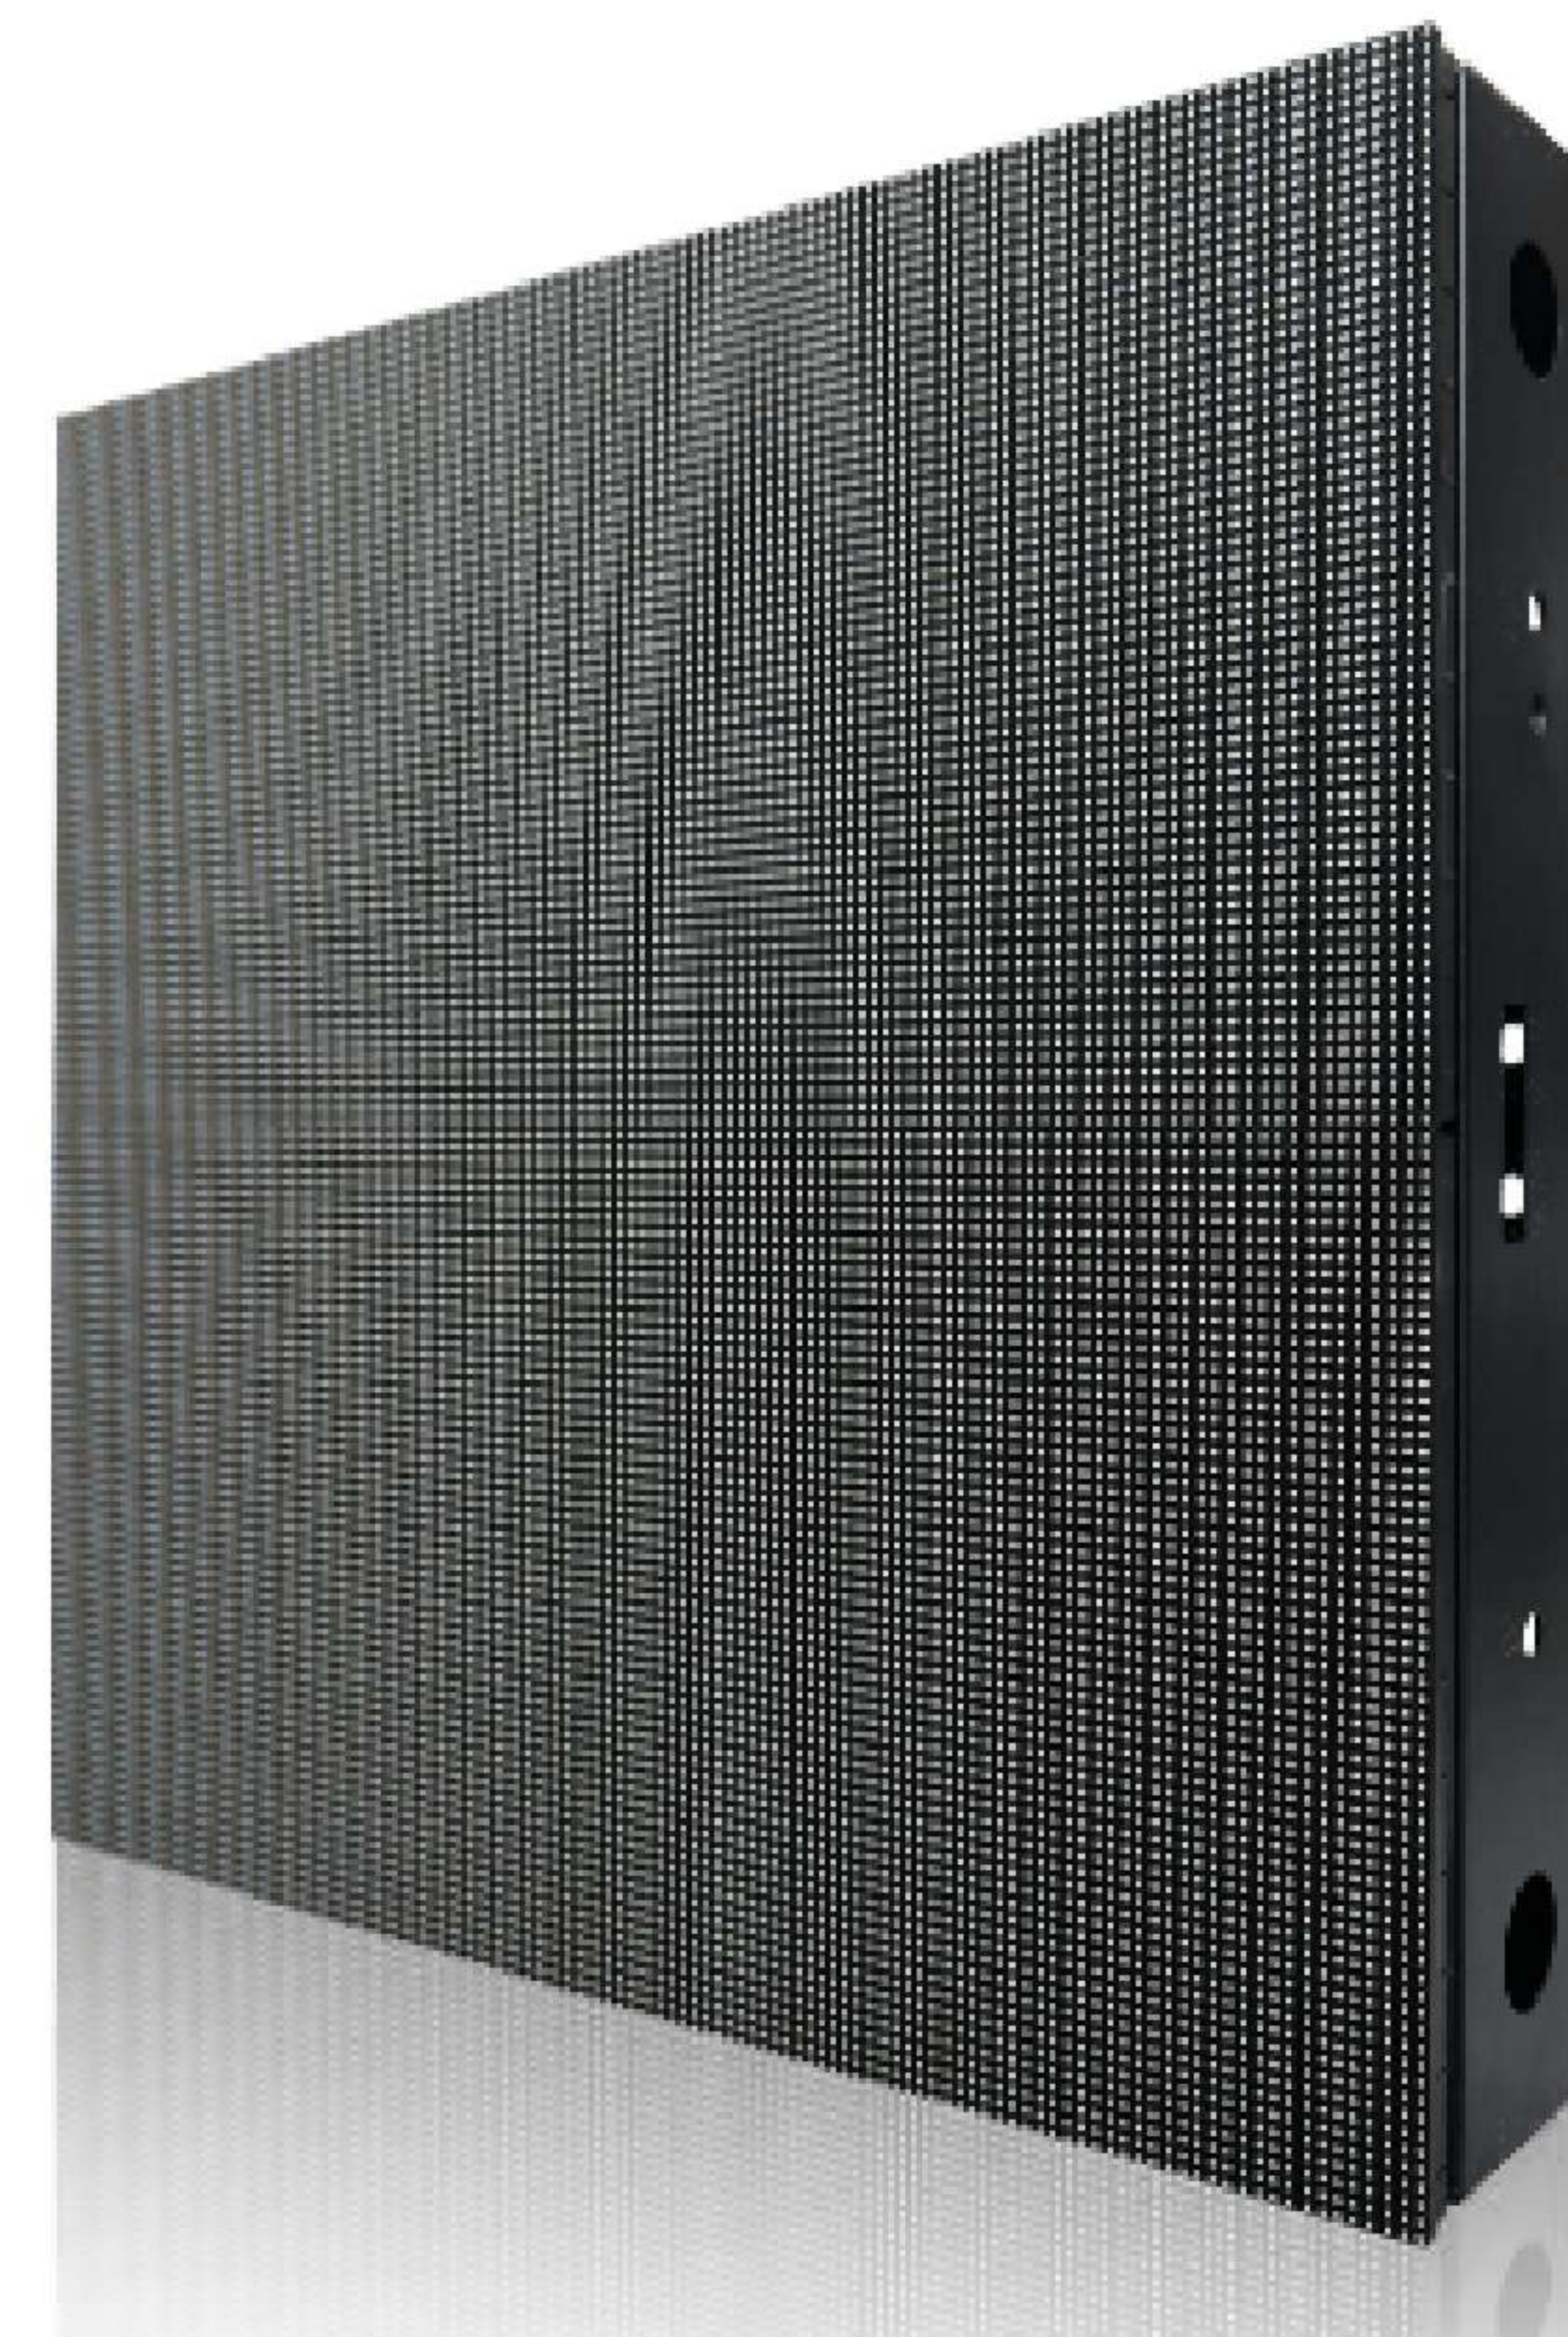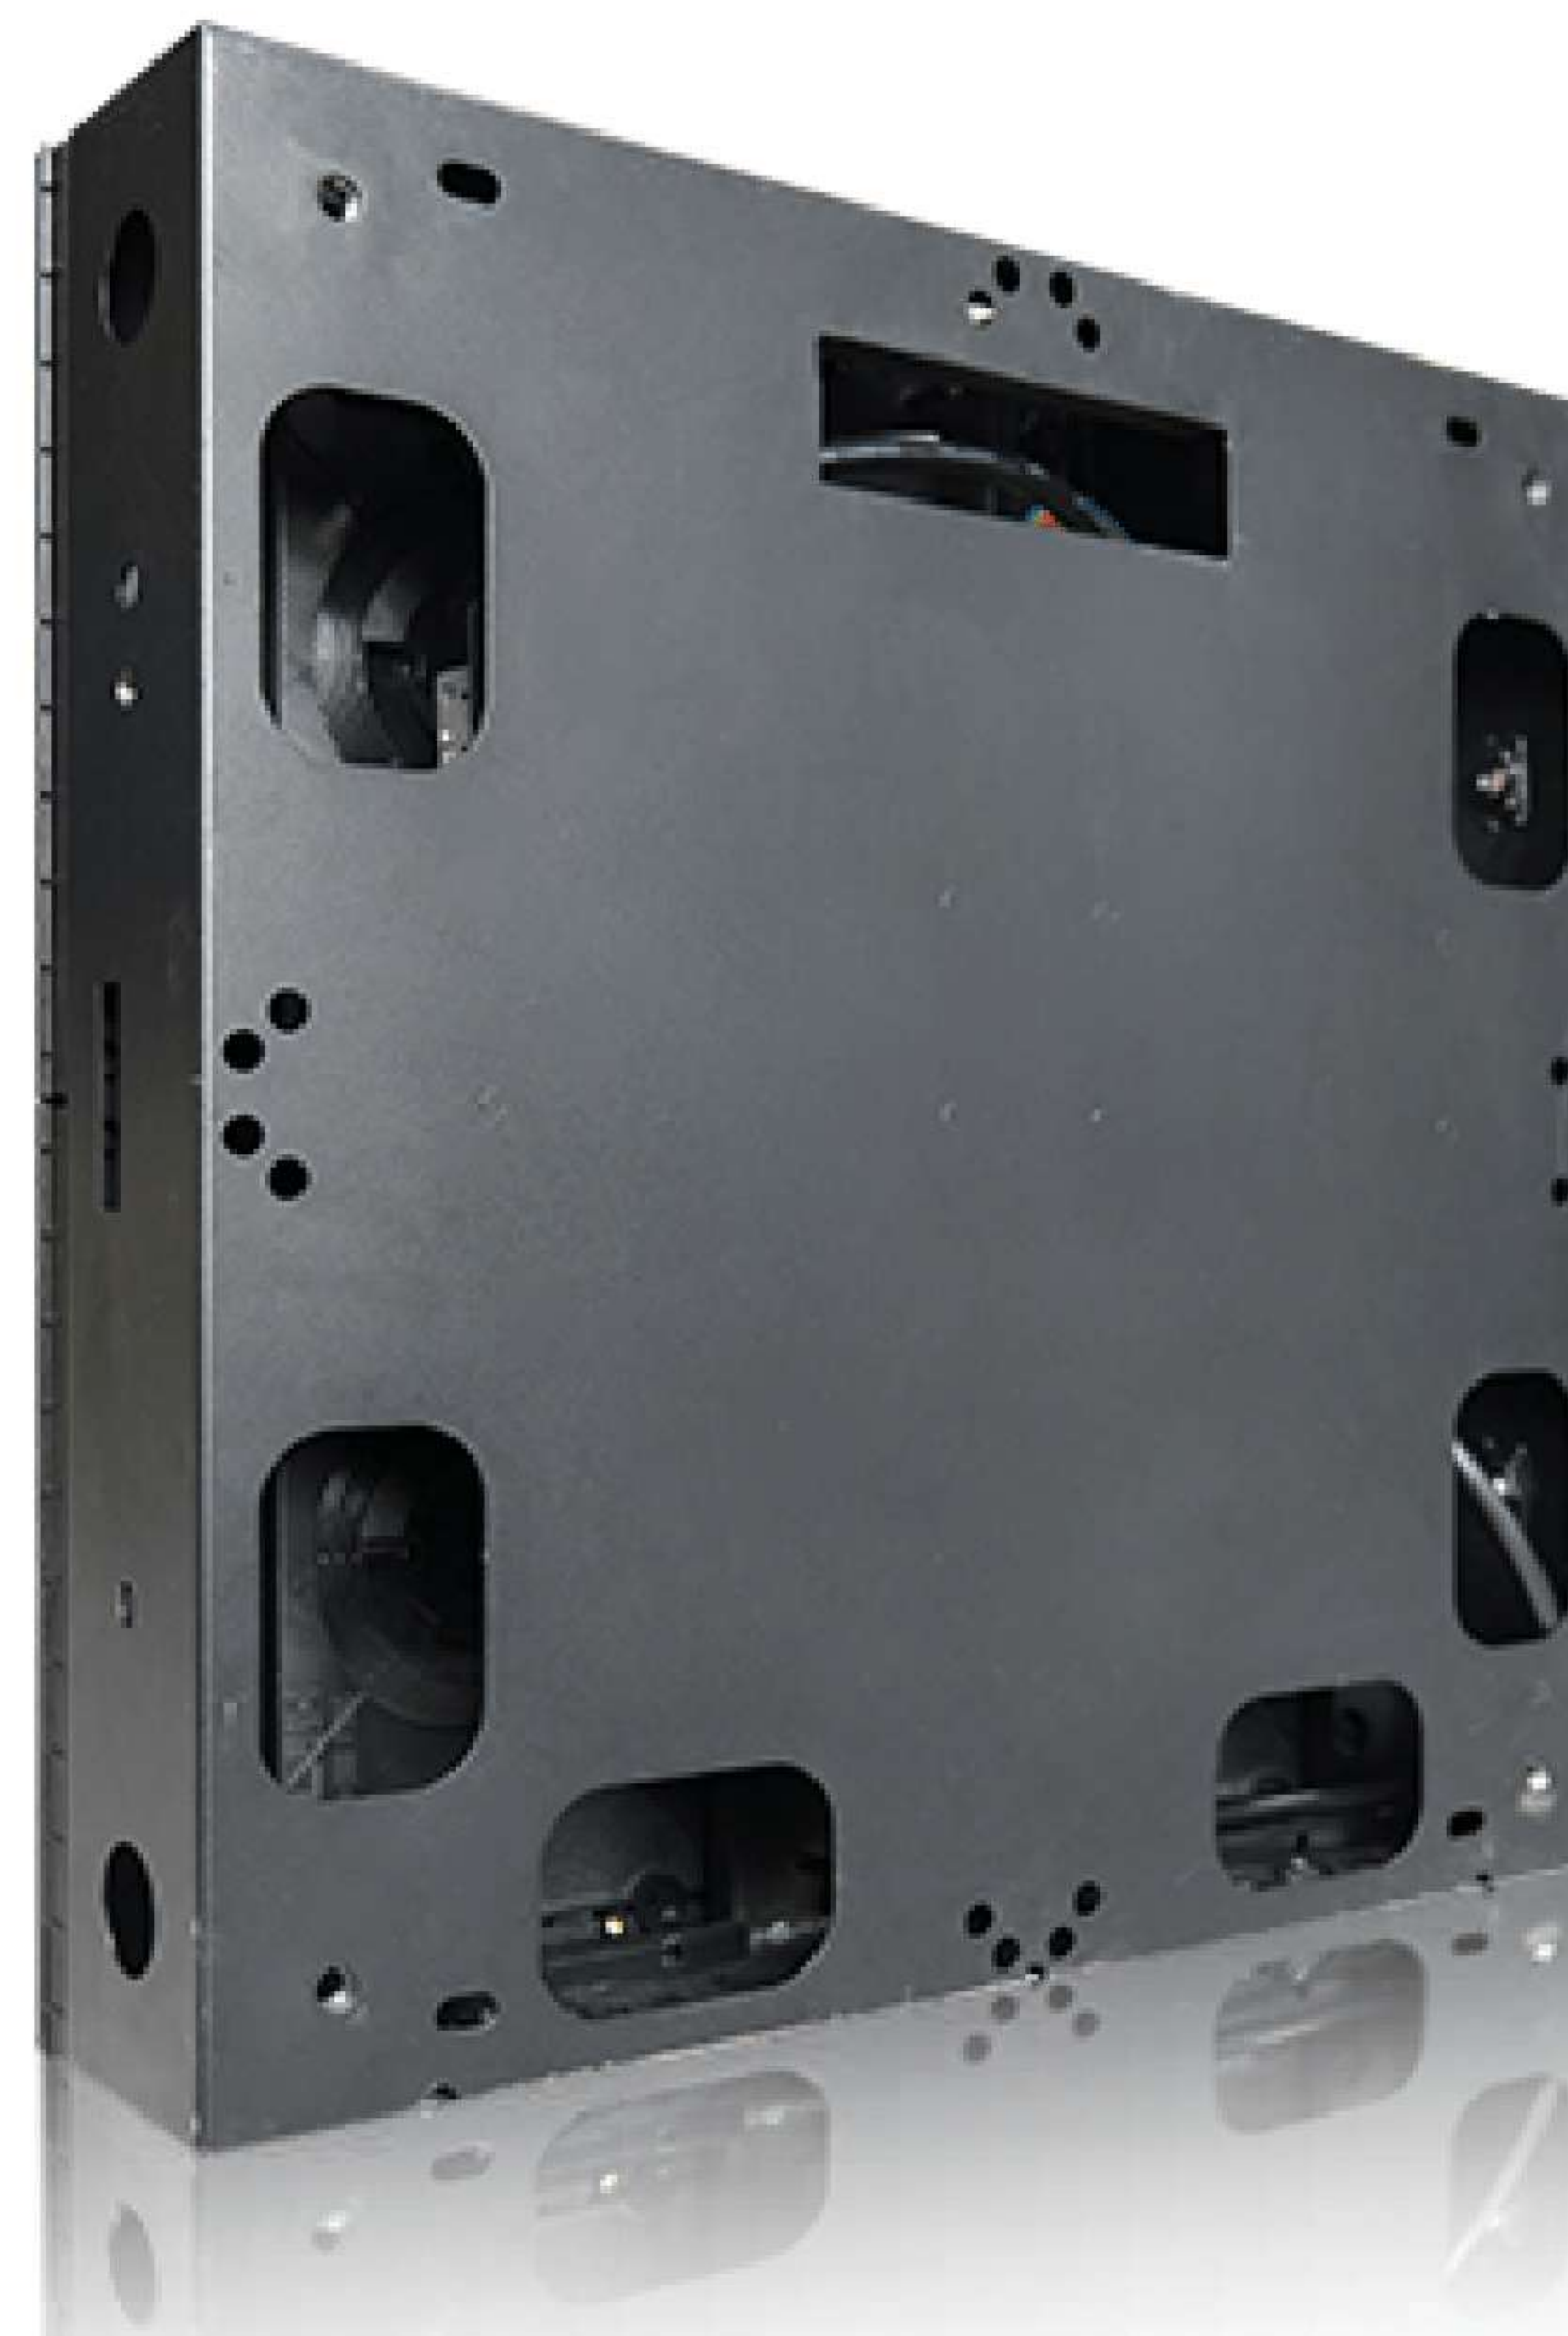





thickness only **108** mm




WEIGHT

500×500mm Canbinet only **8.7** kg
500×1000mm Canbinet only **16.6** kg




Edge lock connection design

Quick assembly, lifting,
and fixing between boxes
are both applicable

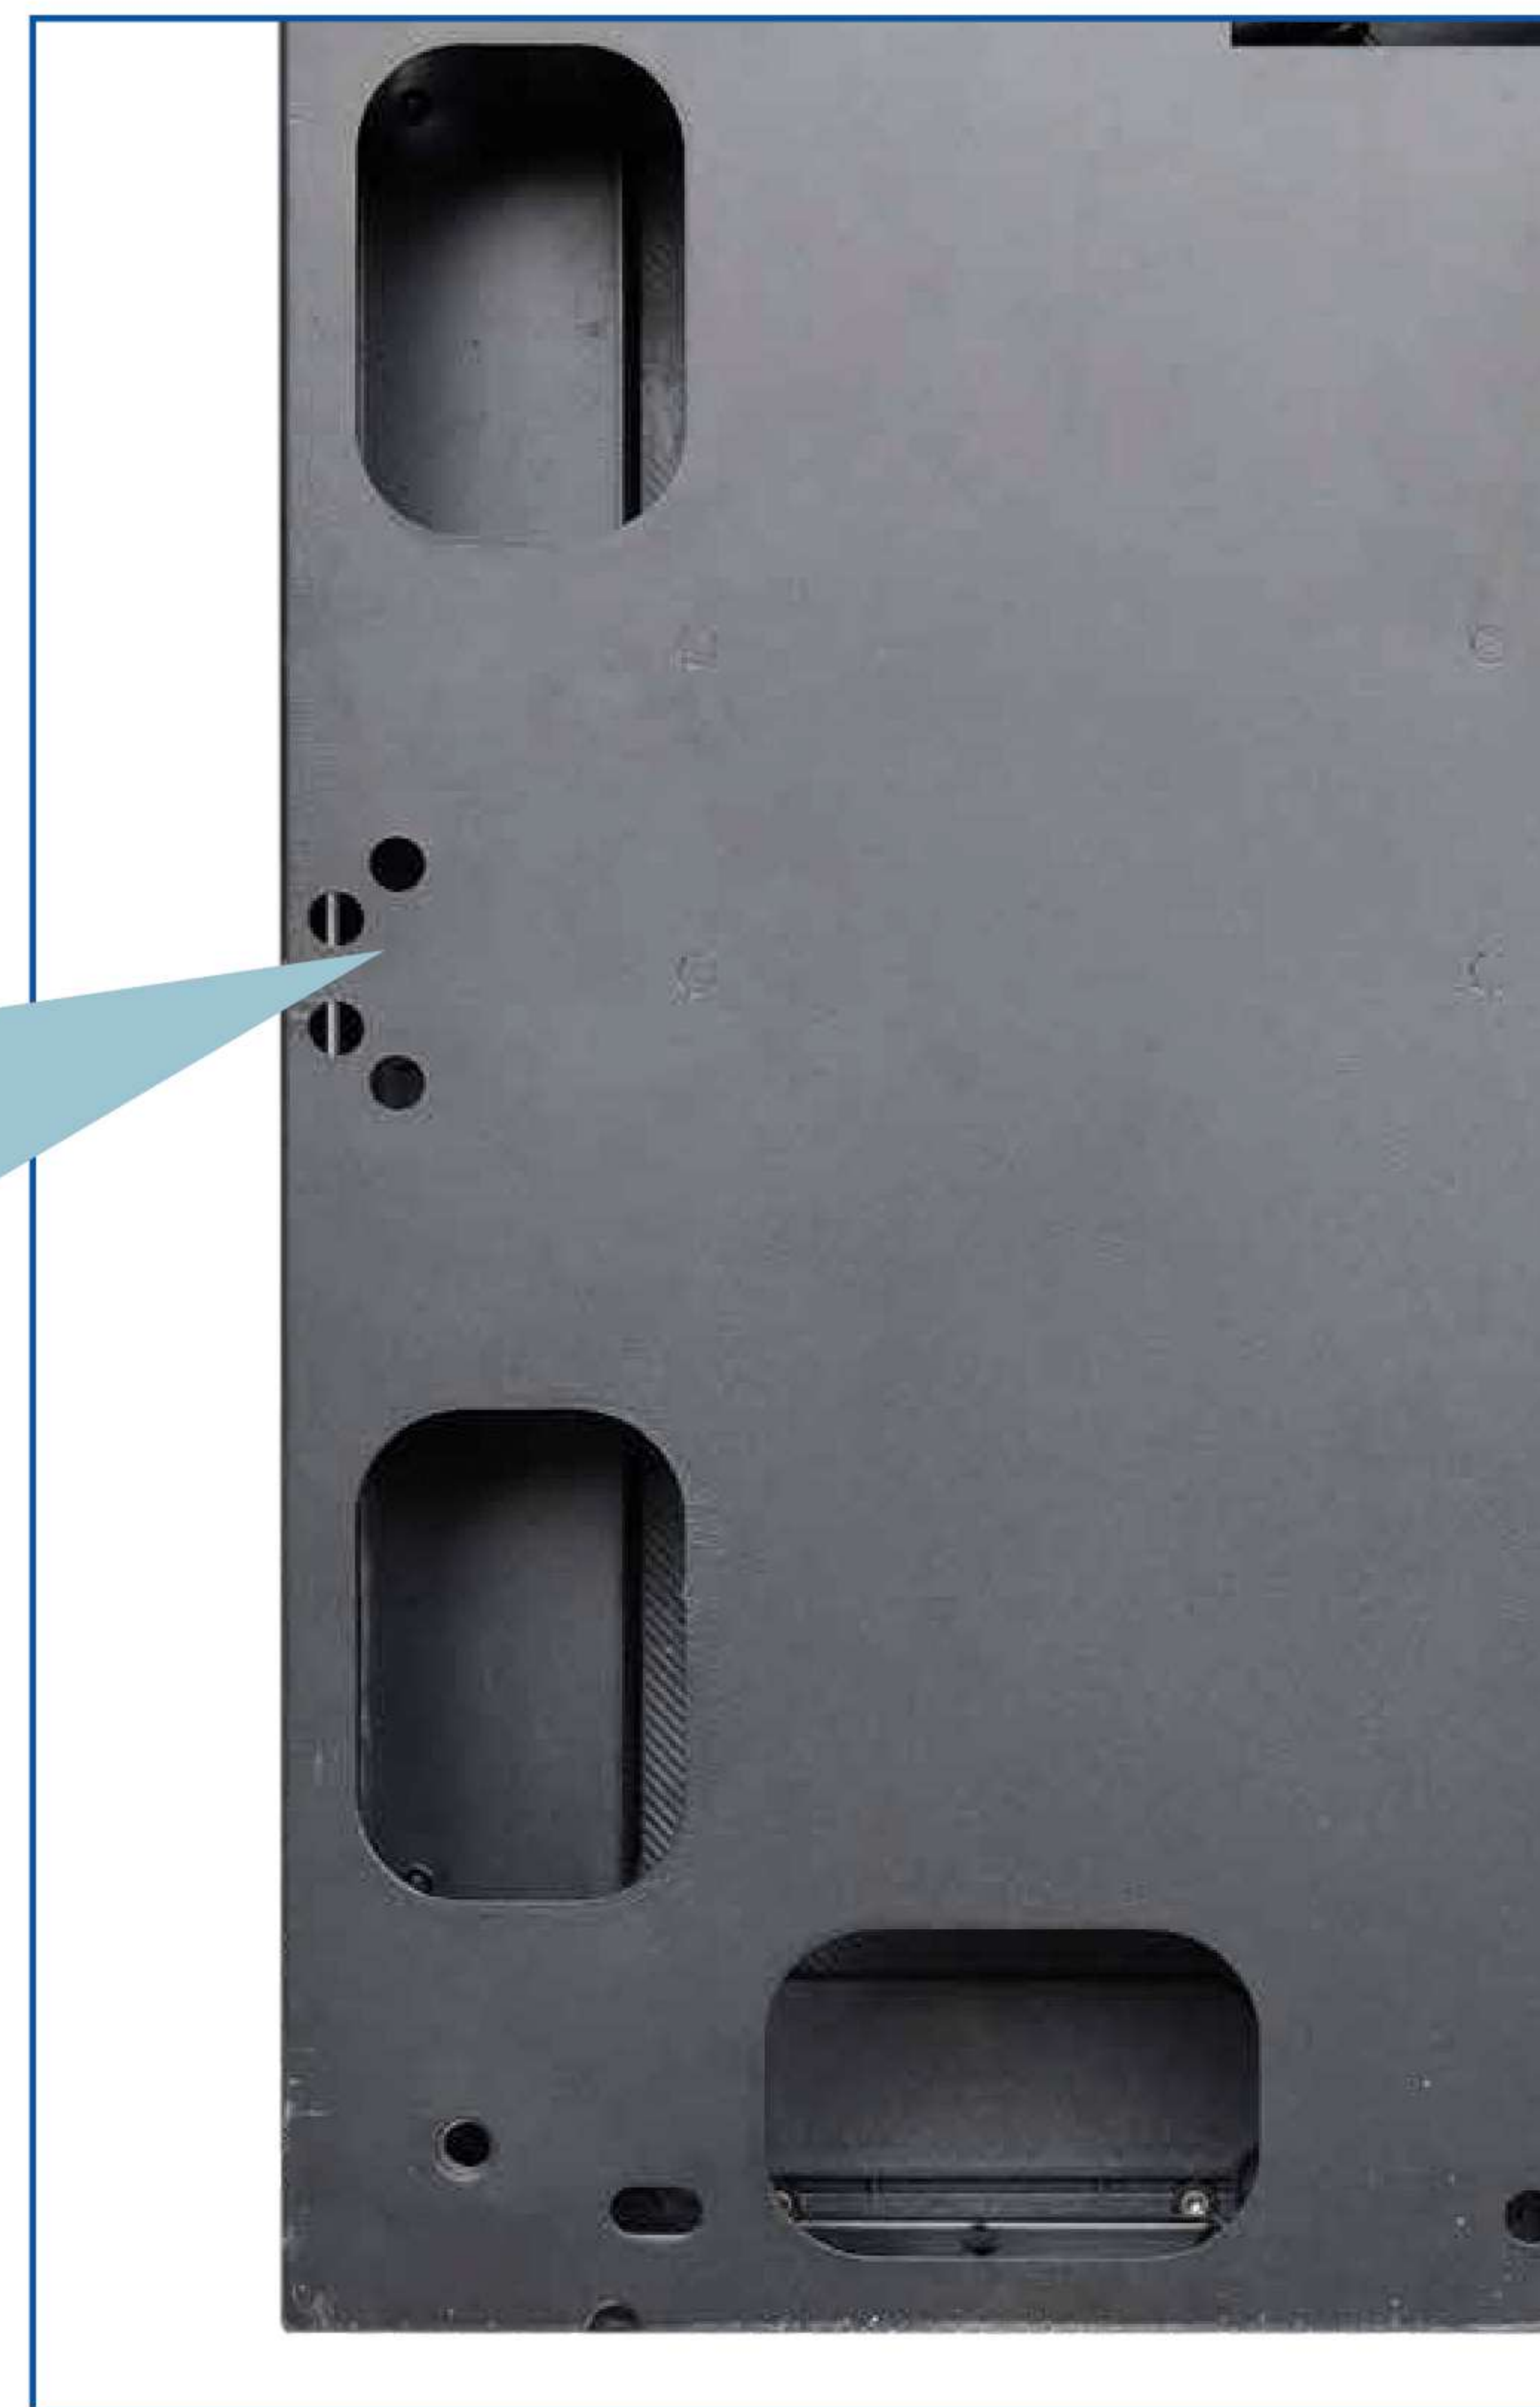


Ultra broad perspective

140 ° ultra wide perspective,
interpreting the same exciting effect from different angles

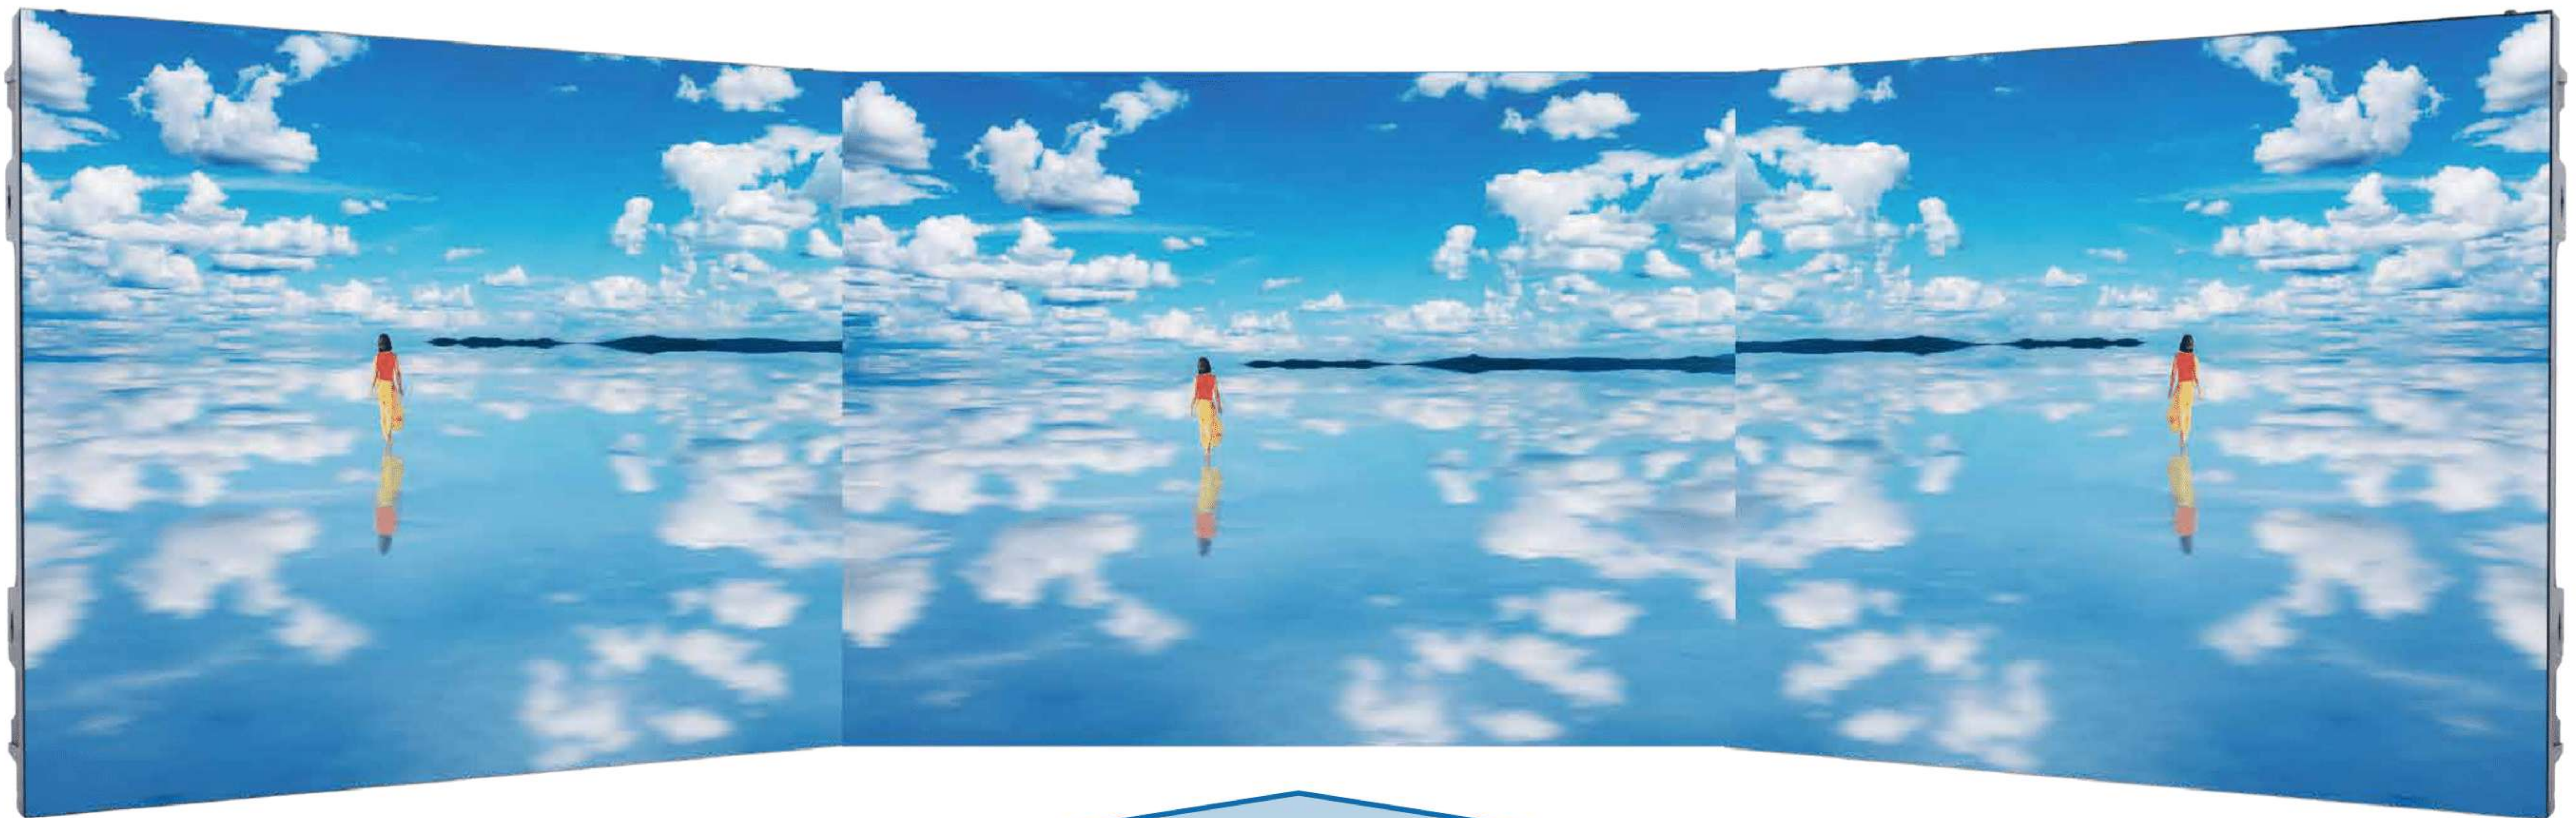


140°

16 bit high grayscale

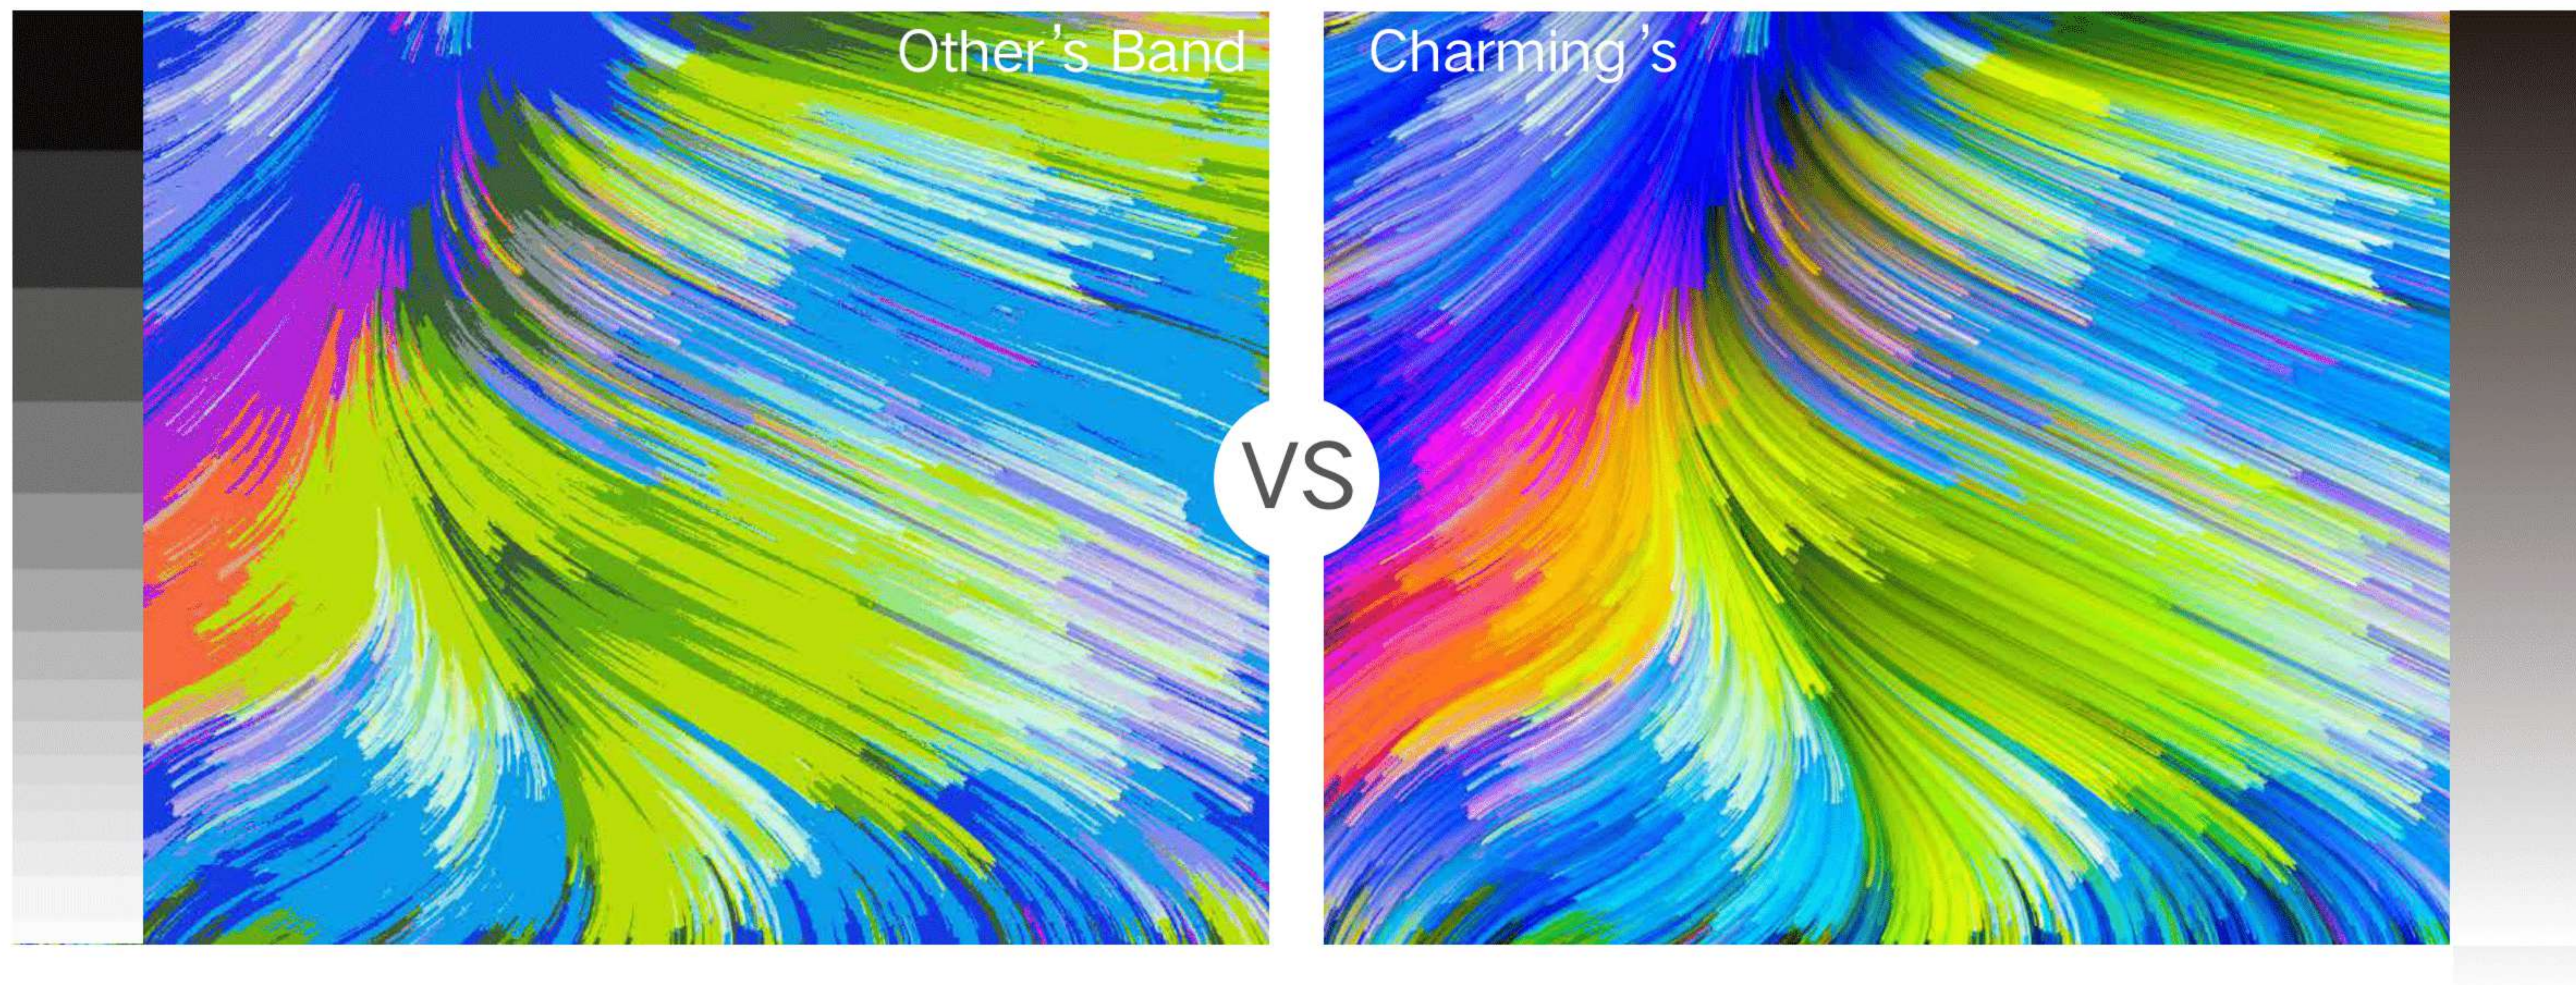

The grayscale level is the decisive factor in displaying colors.
The higher the grayscale level, the richer the displayed
colors and the more delicate the image.

1920/7680Hz High refresh rate

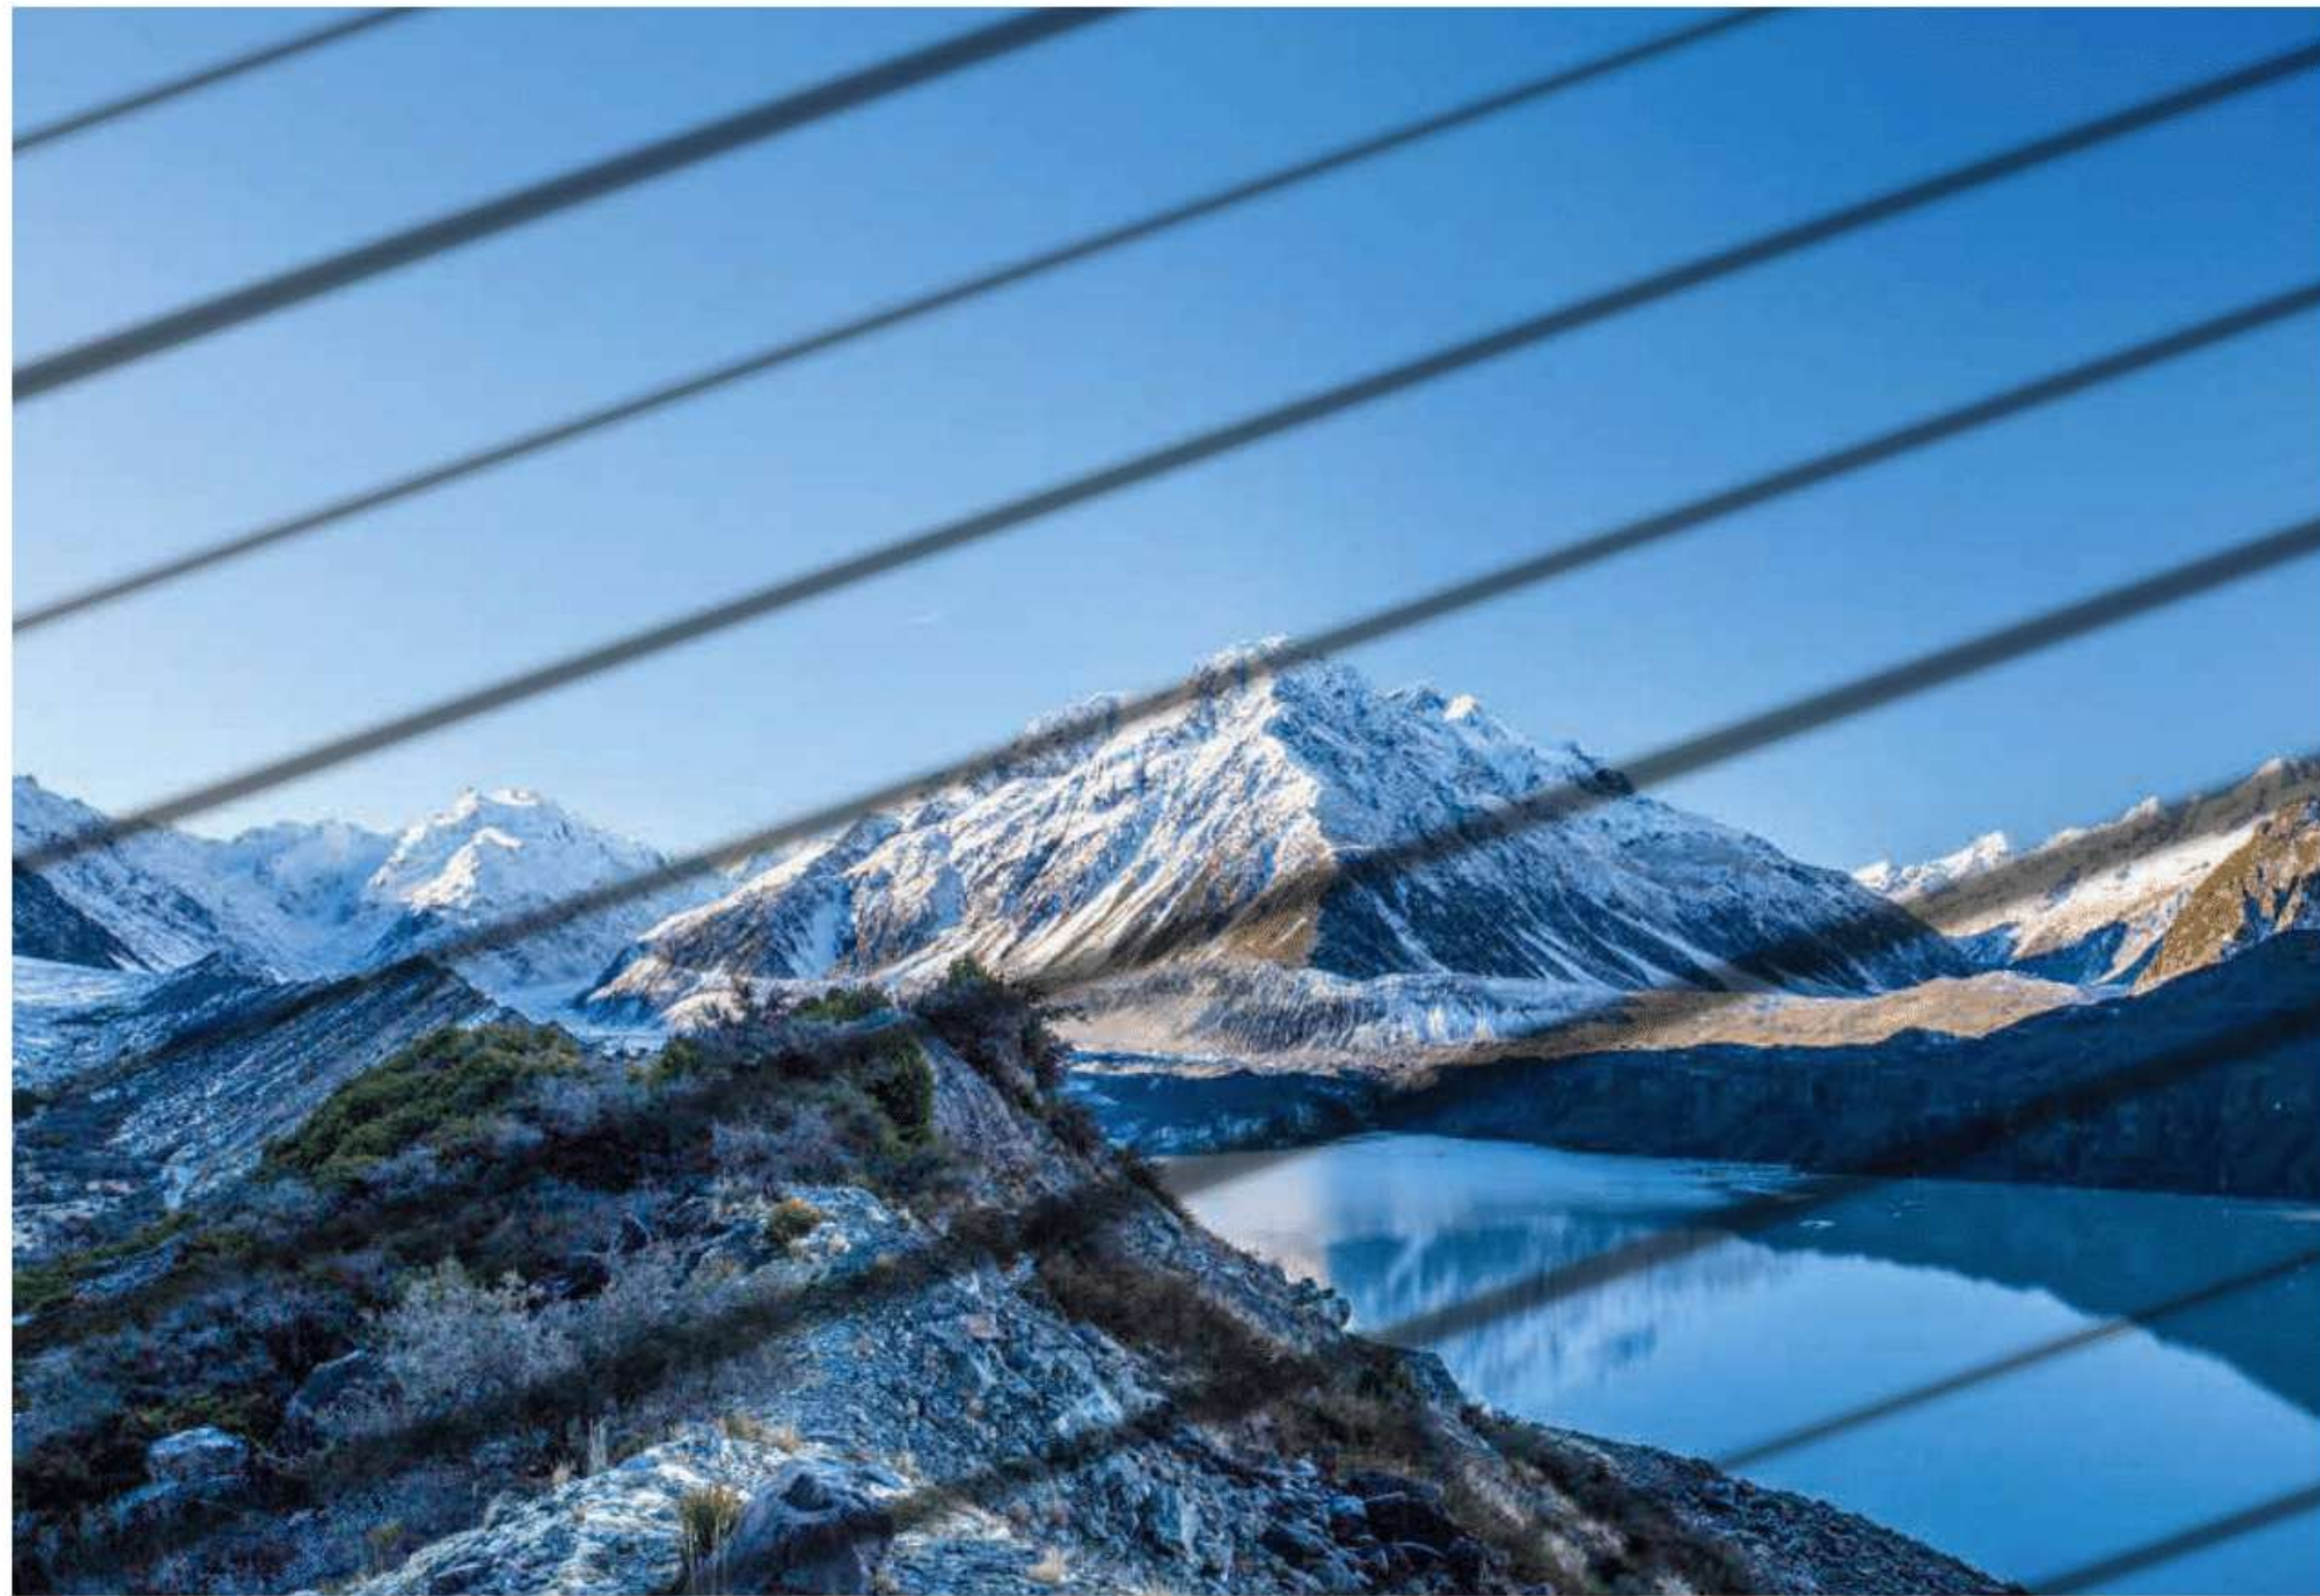

Low refresh rate



High refresh rate


The display is smooth like flowing water, with clear image quality and vivid colors



Wider color range



To ensure high-quality visual effects with higher clarity, contrast, and saturation.

Using high-quality lamp beads for a longer lifespan than typical products on the market

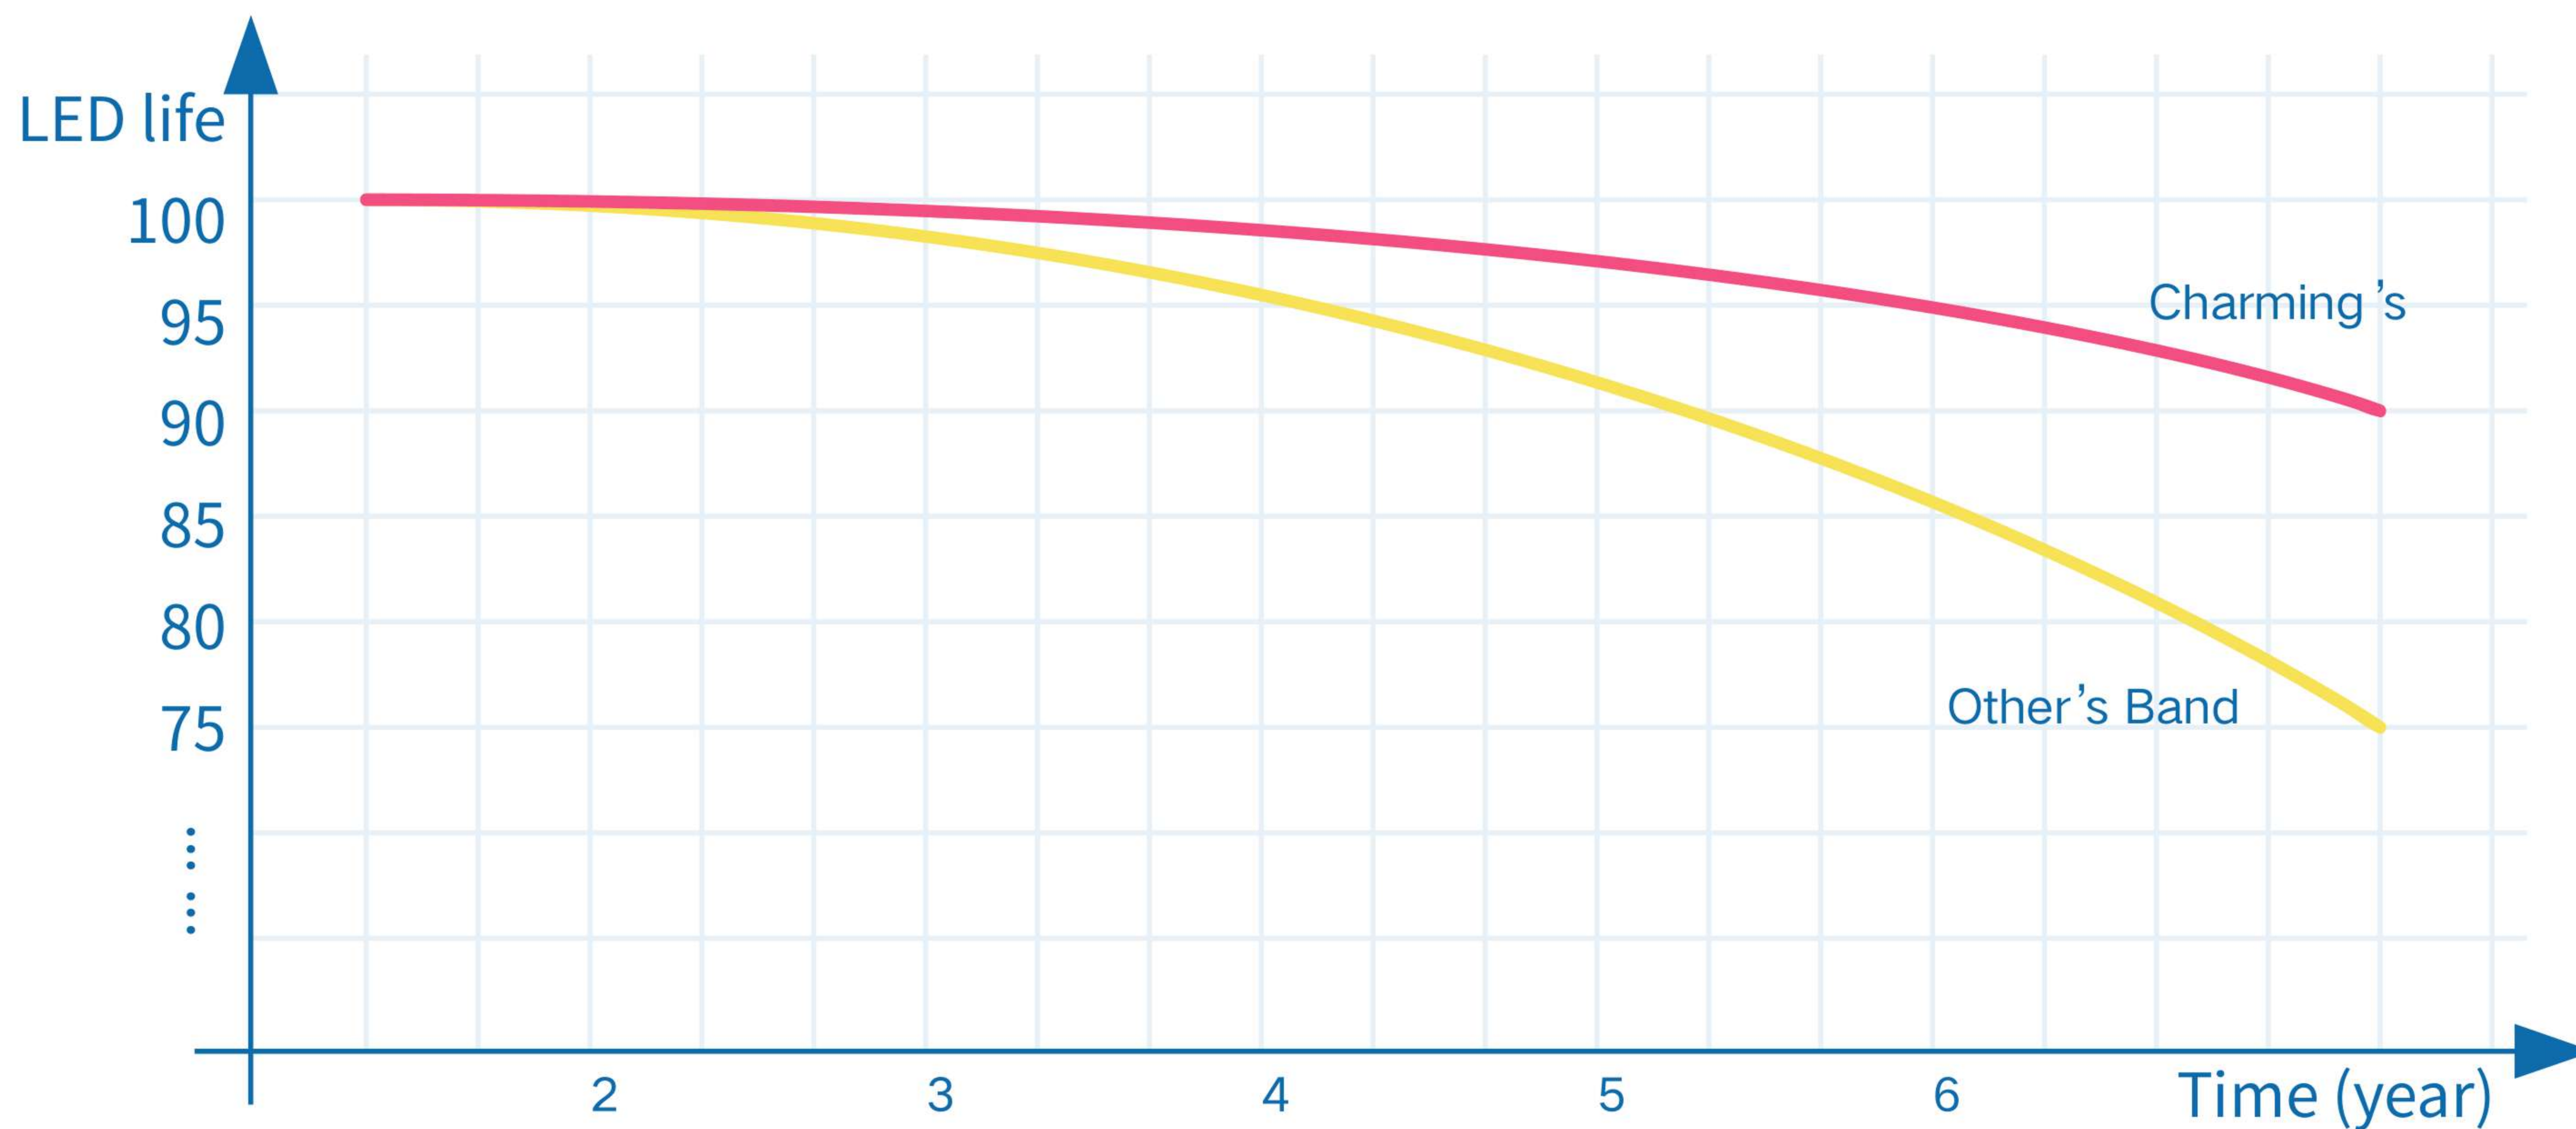

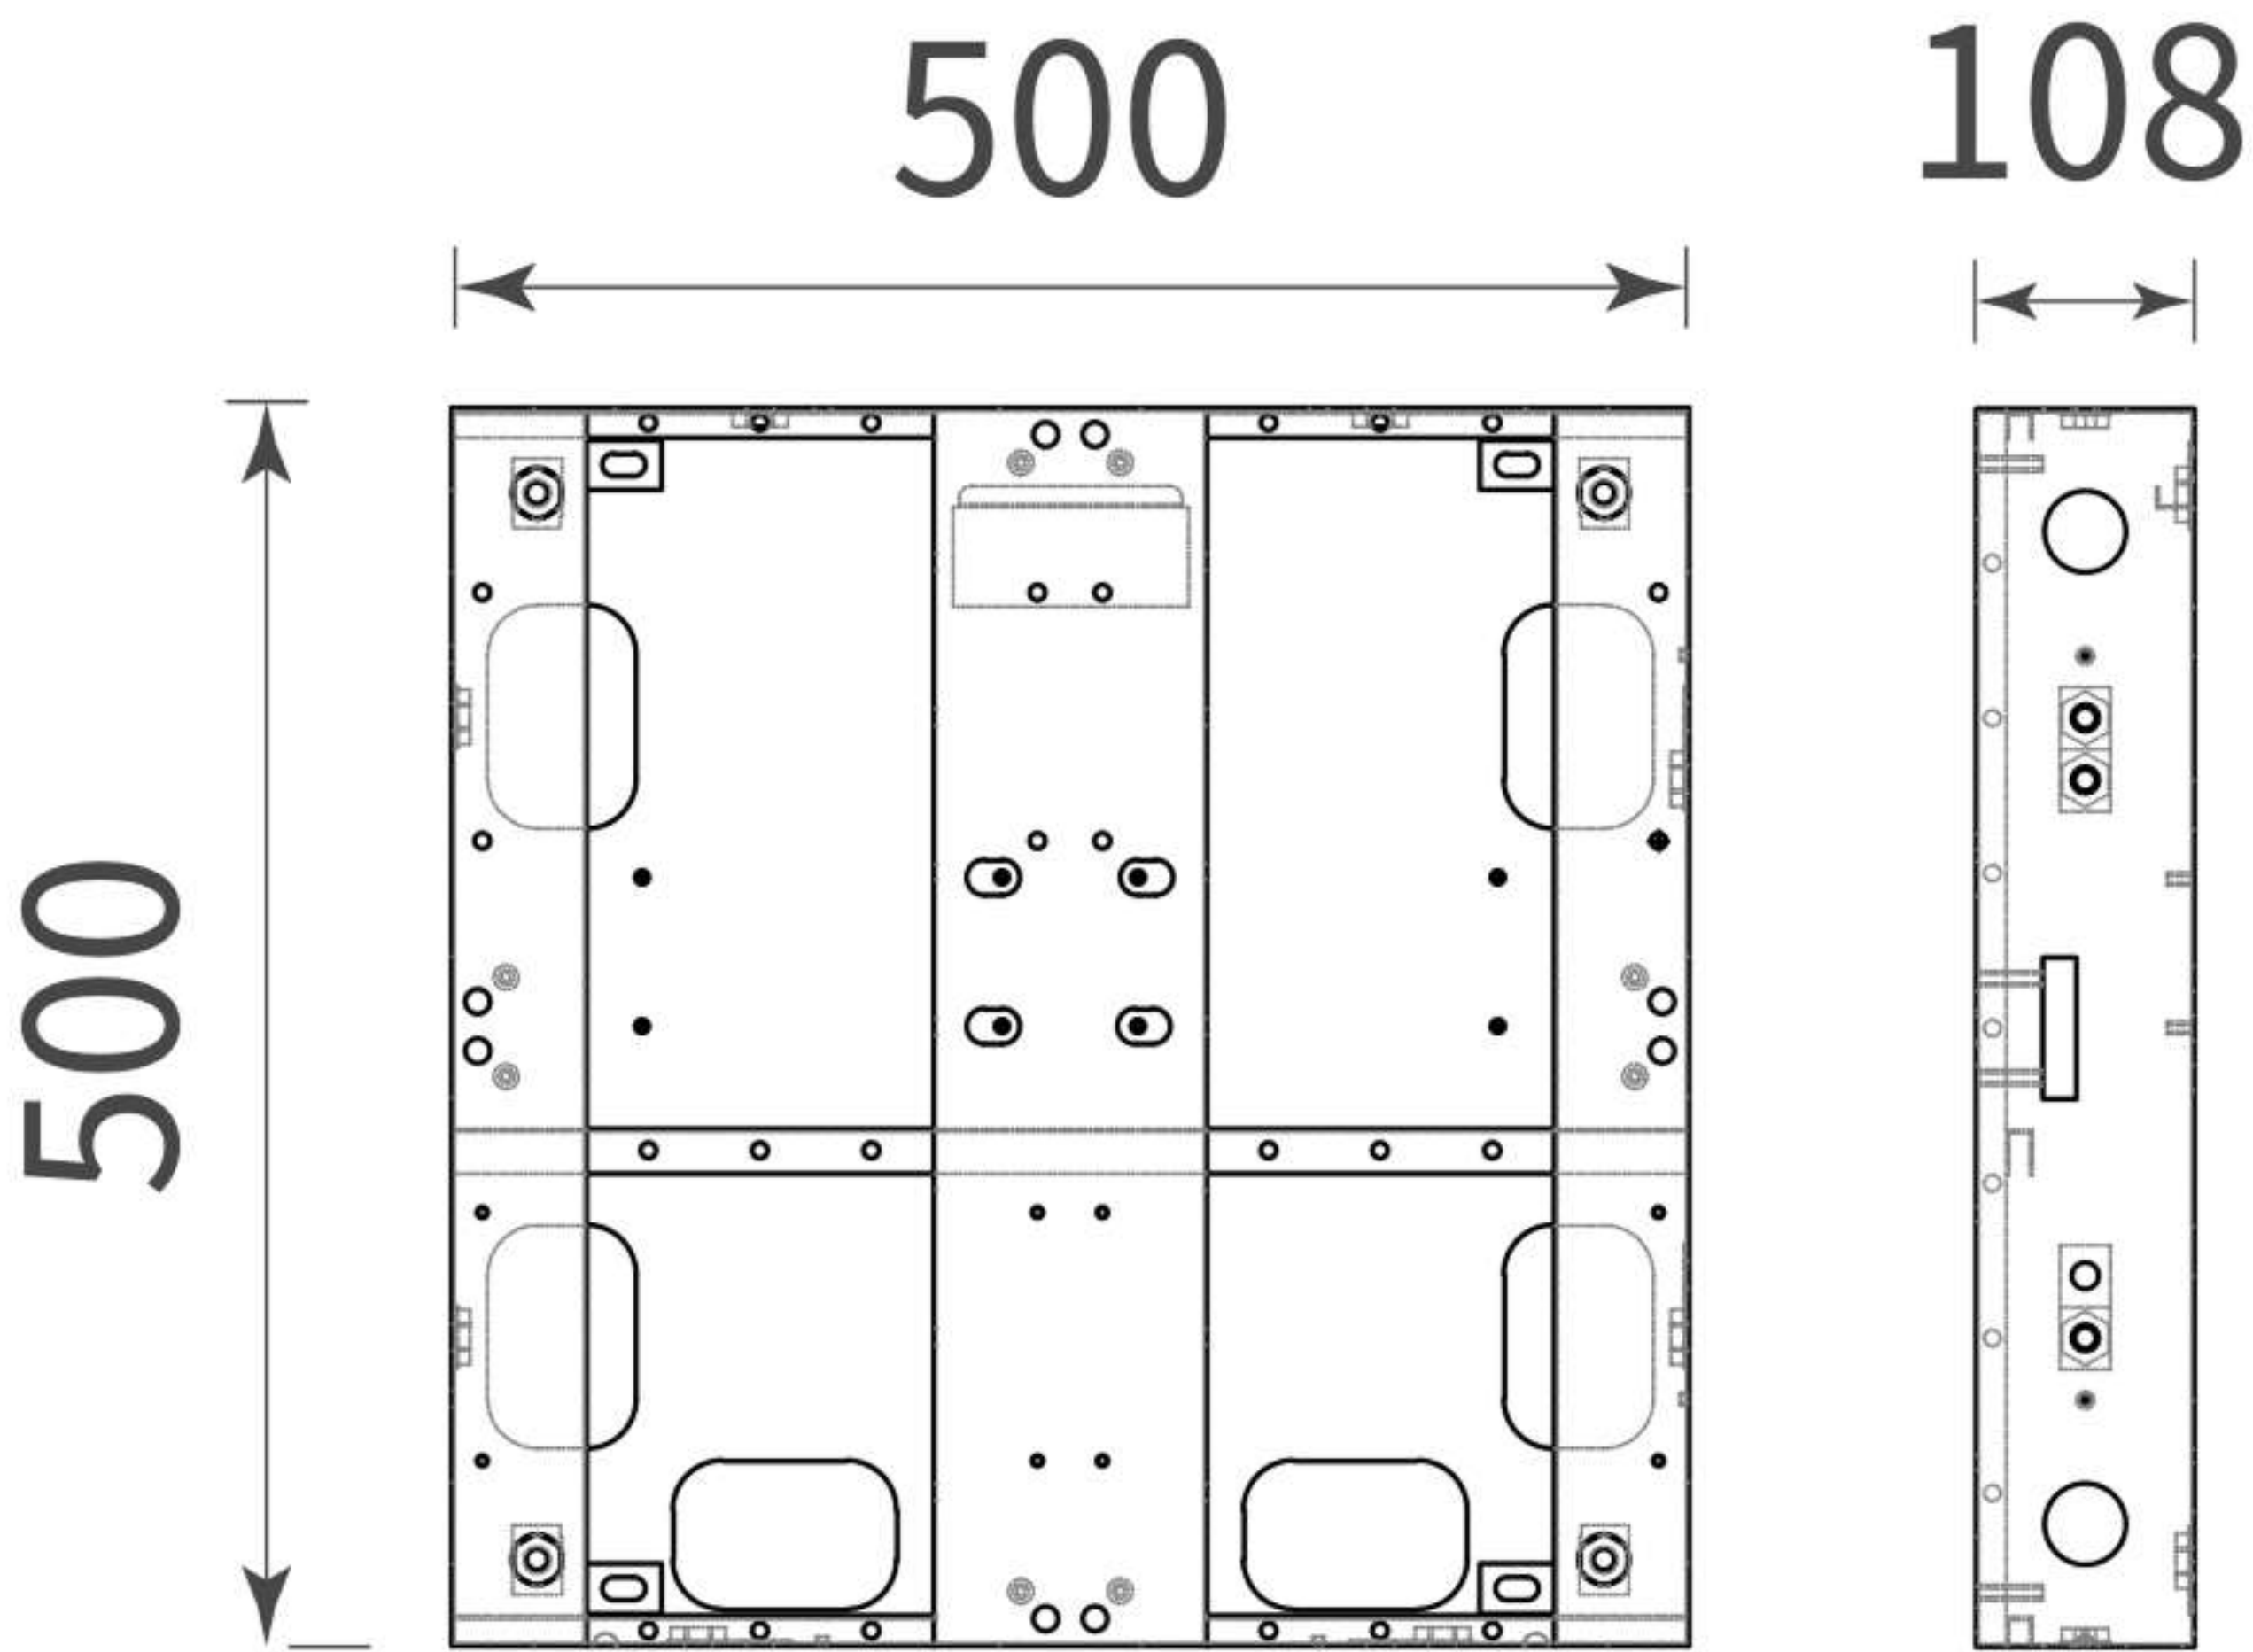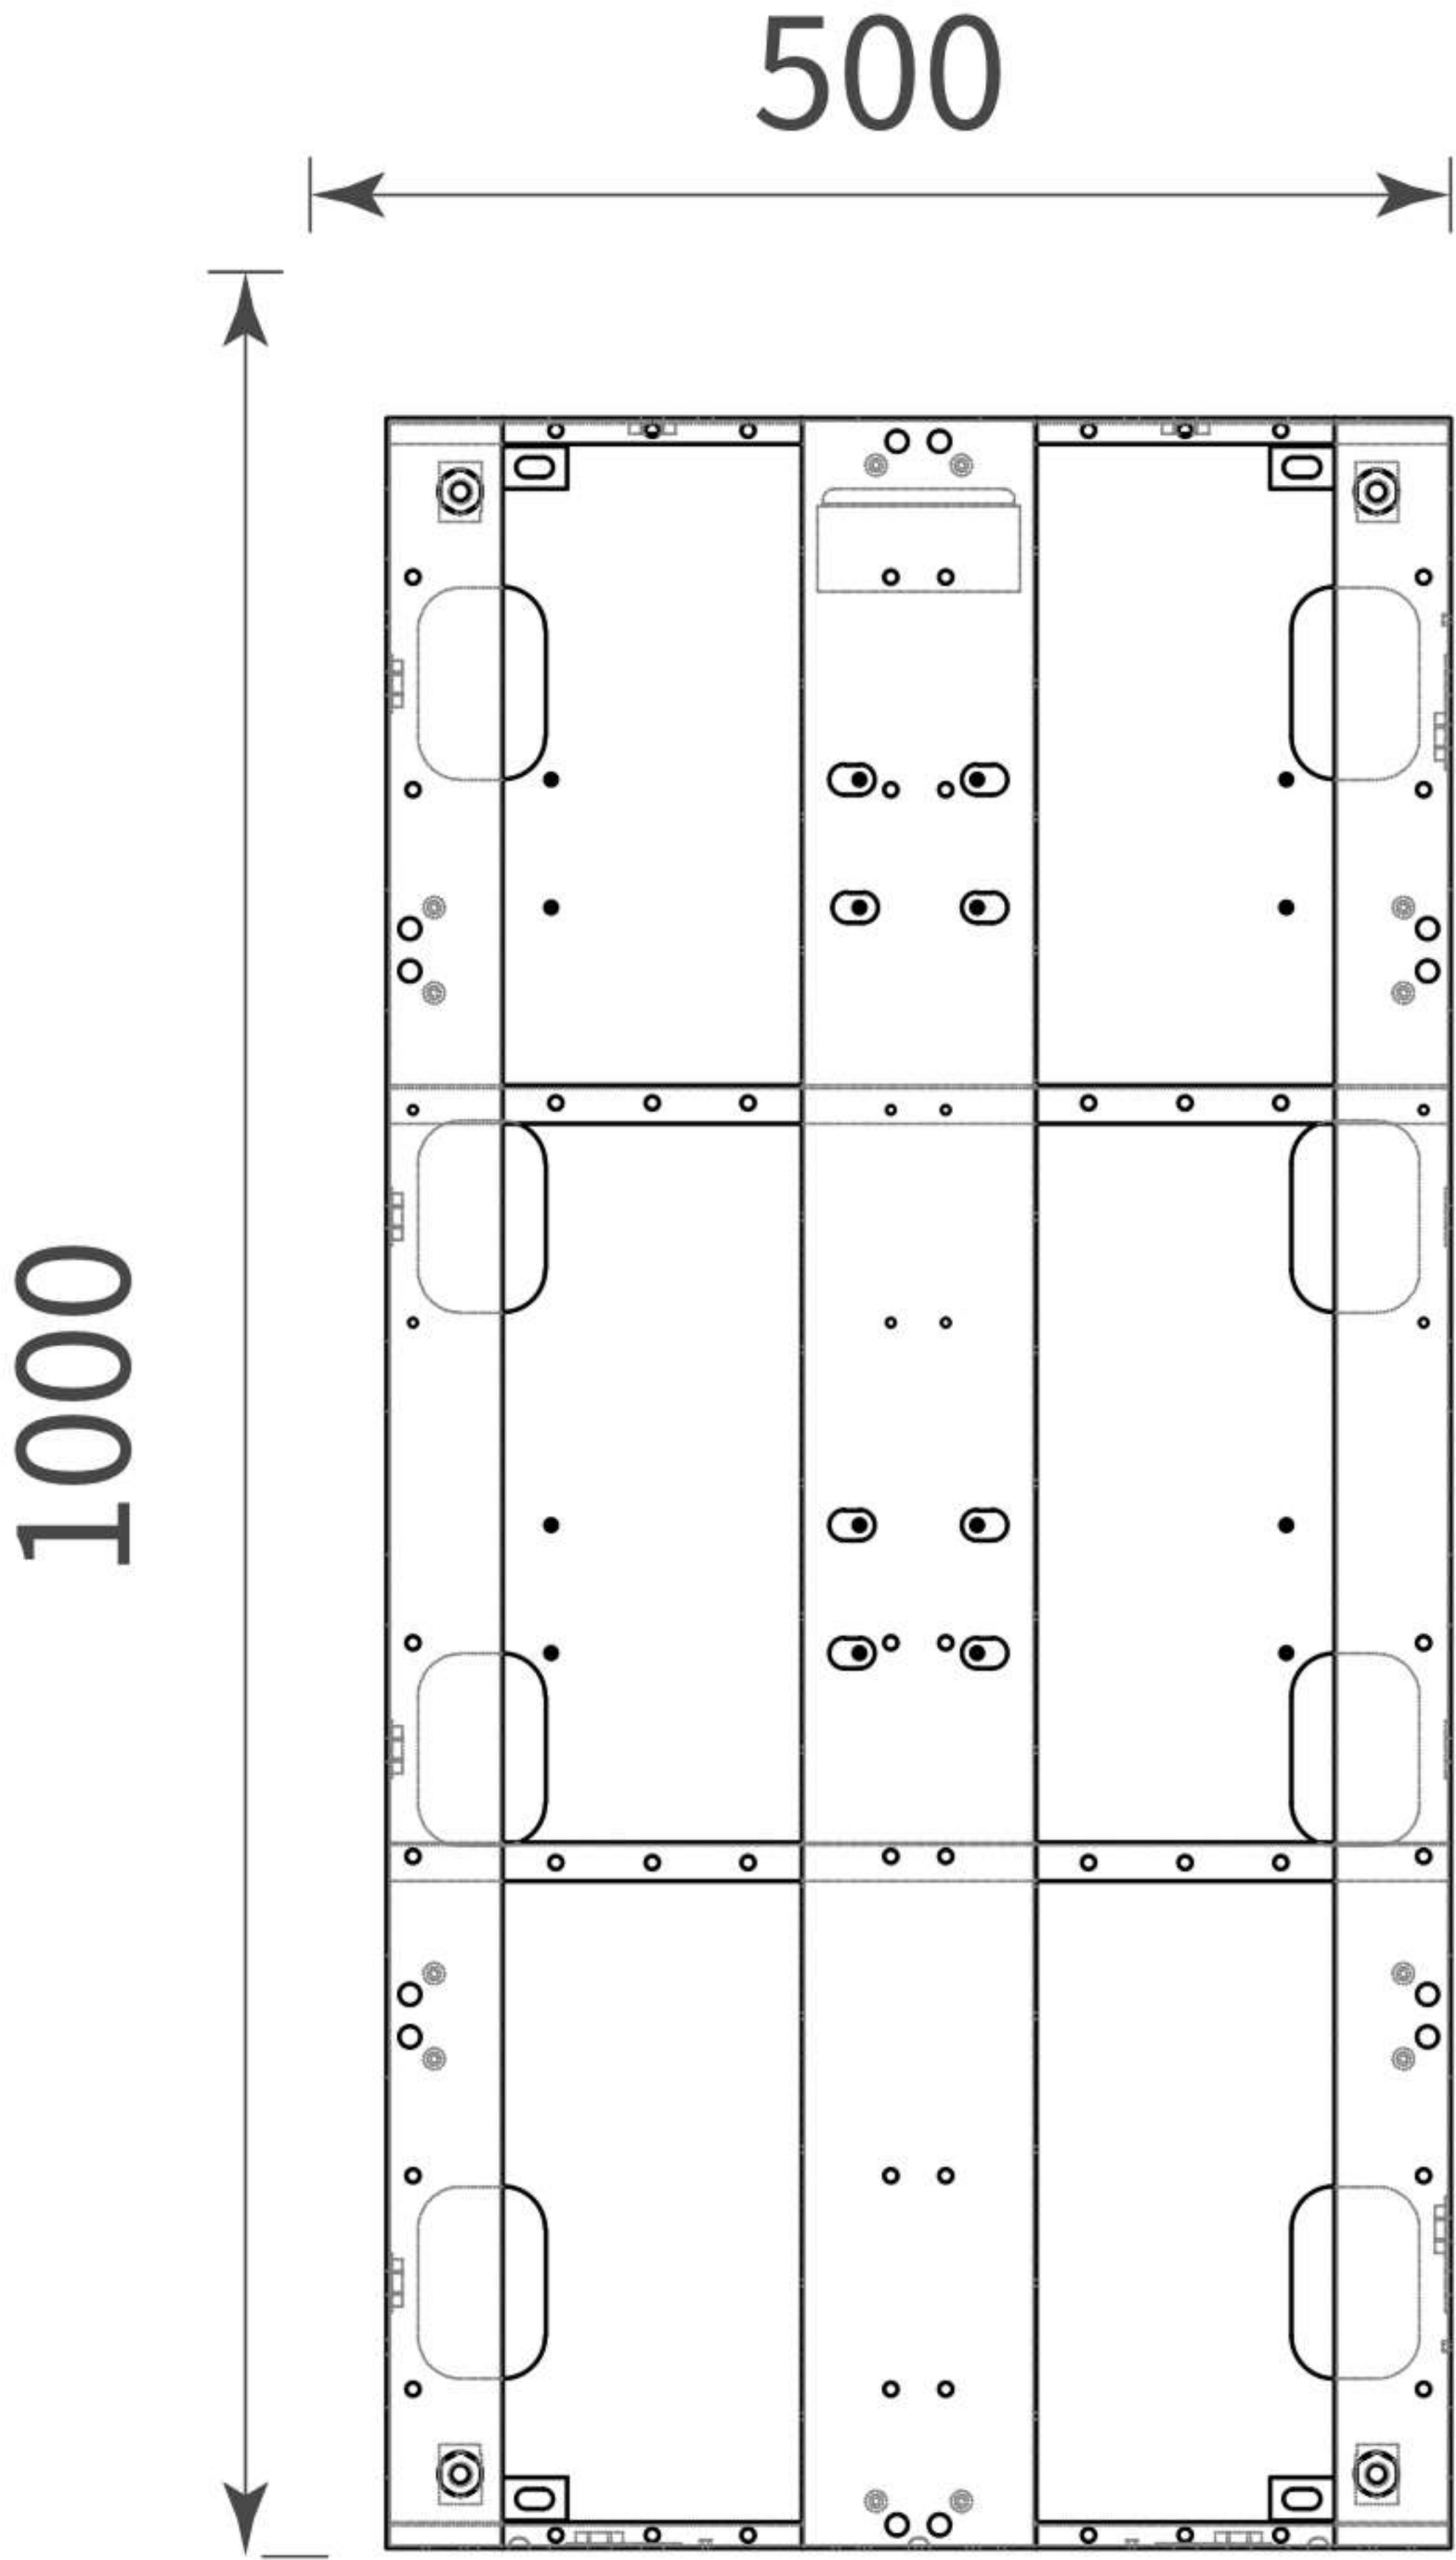

Unit:mm

型 号 Type Number	391-500	391-1000
规格尺寸 Dimension(MM)	500x500x108MM	500x1000x108MM
最大功率Max.Power(W)	200W	400W
箱体重量 Cabinet Weight(KG)	8.7KG	16.6KG
亮度Brightness(CD/m)	≥4500CD/m ²	
LED规格 LED Standard	SMD1921	
可视角度 Viewing Angle	140°	
防护等级 Protection Level	IP65	
刷新率 Refresh Rate(Hz)	1920Hz / 3840Hz / 7680Hz	
像素点间距 Pixel Pitch(MM)	3.91MM	
扫描模式 Scan Mode	1/16 Scan	
像素密度 Pixel Density(Dot/m)	65536 Dot/m ²	
箱体材质 Cabinet Material	Iron	
维护方式 Maintenance Method	Pre maintenance	
灰度等级 Grey Level	14-16 Bit	
工作温度Working Temperature	-20~60°C	
工作湿度Working Humidity	10%-90%RH	
使用寿命 Life Span	≥50000 Hours	
工作电压 Working Voltage	AC 110V/220V,50/60HZ	

TEAM SPIRIT



Official partners



CARGO SHIPPING

Frequent destinations cover over 150 countries/regions.

More than 20,000 customers from

North and South American, Europe, Middle East, East-South Asia, Africa, Australia, etc.




Accept different shipping terms, such as EXW, FOB, CFR, CIF, DDU and DDP, plenty of shipping resources are available to make you rest-assured of shipping.

PRODUCTION PROCESS DIAGRAM




生产工艺图

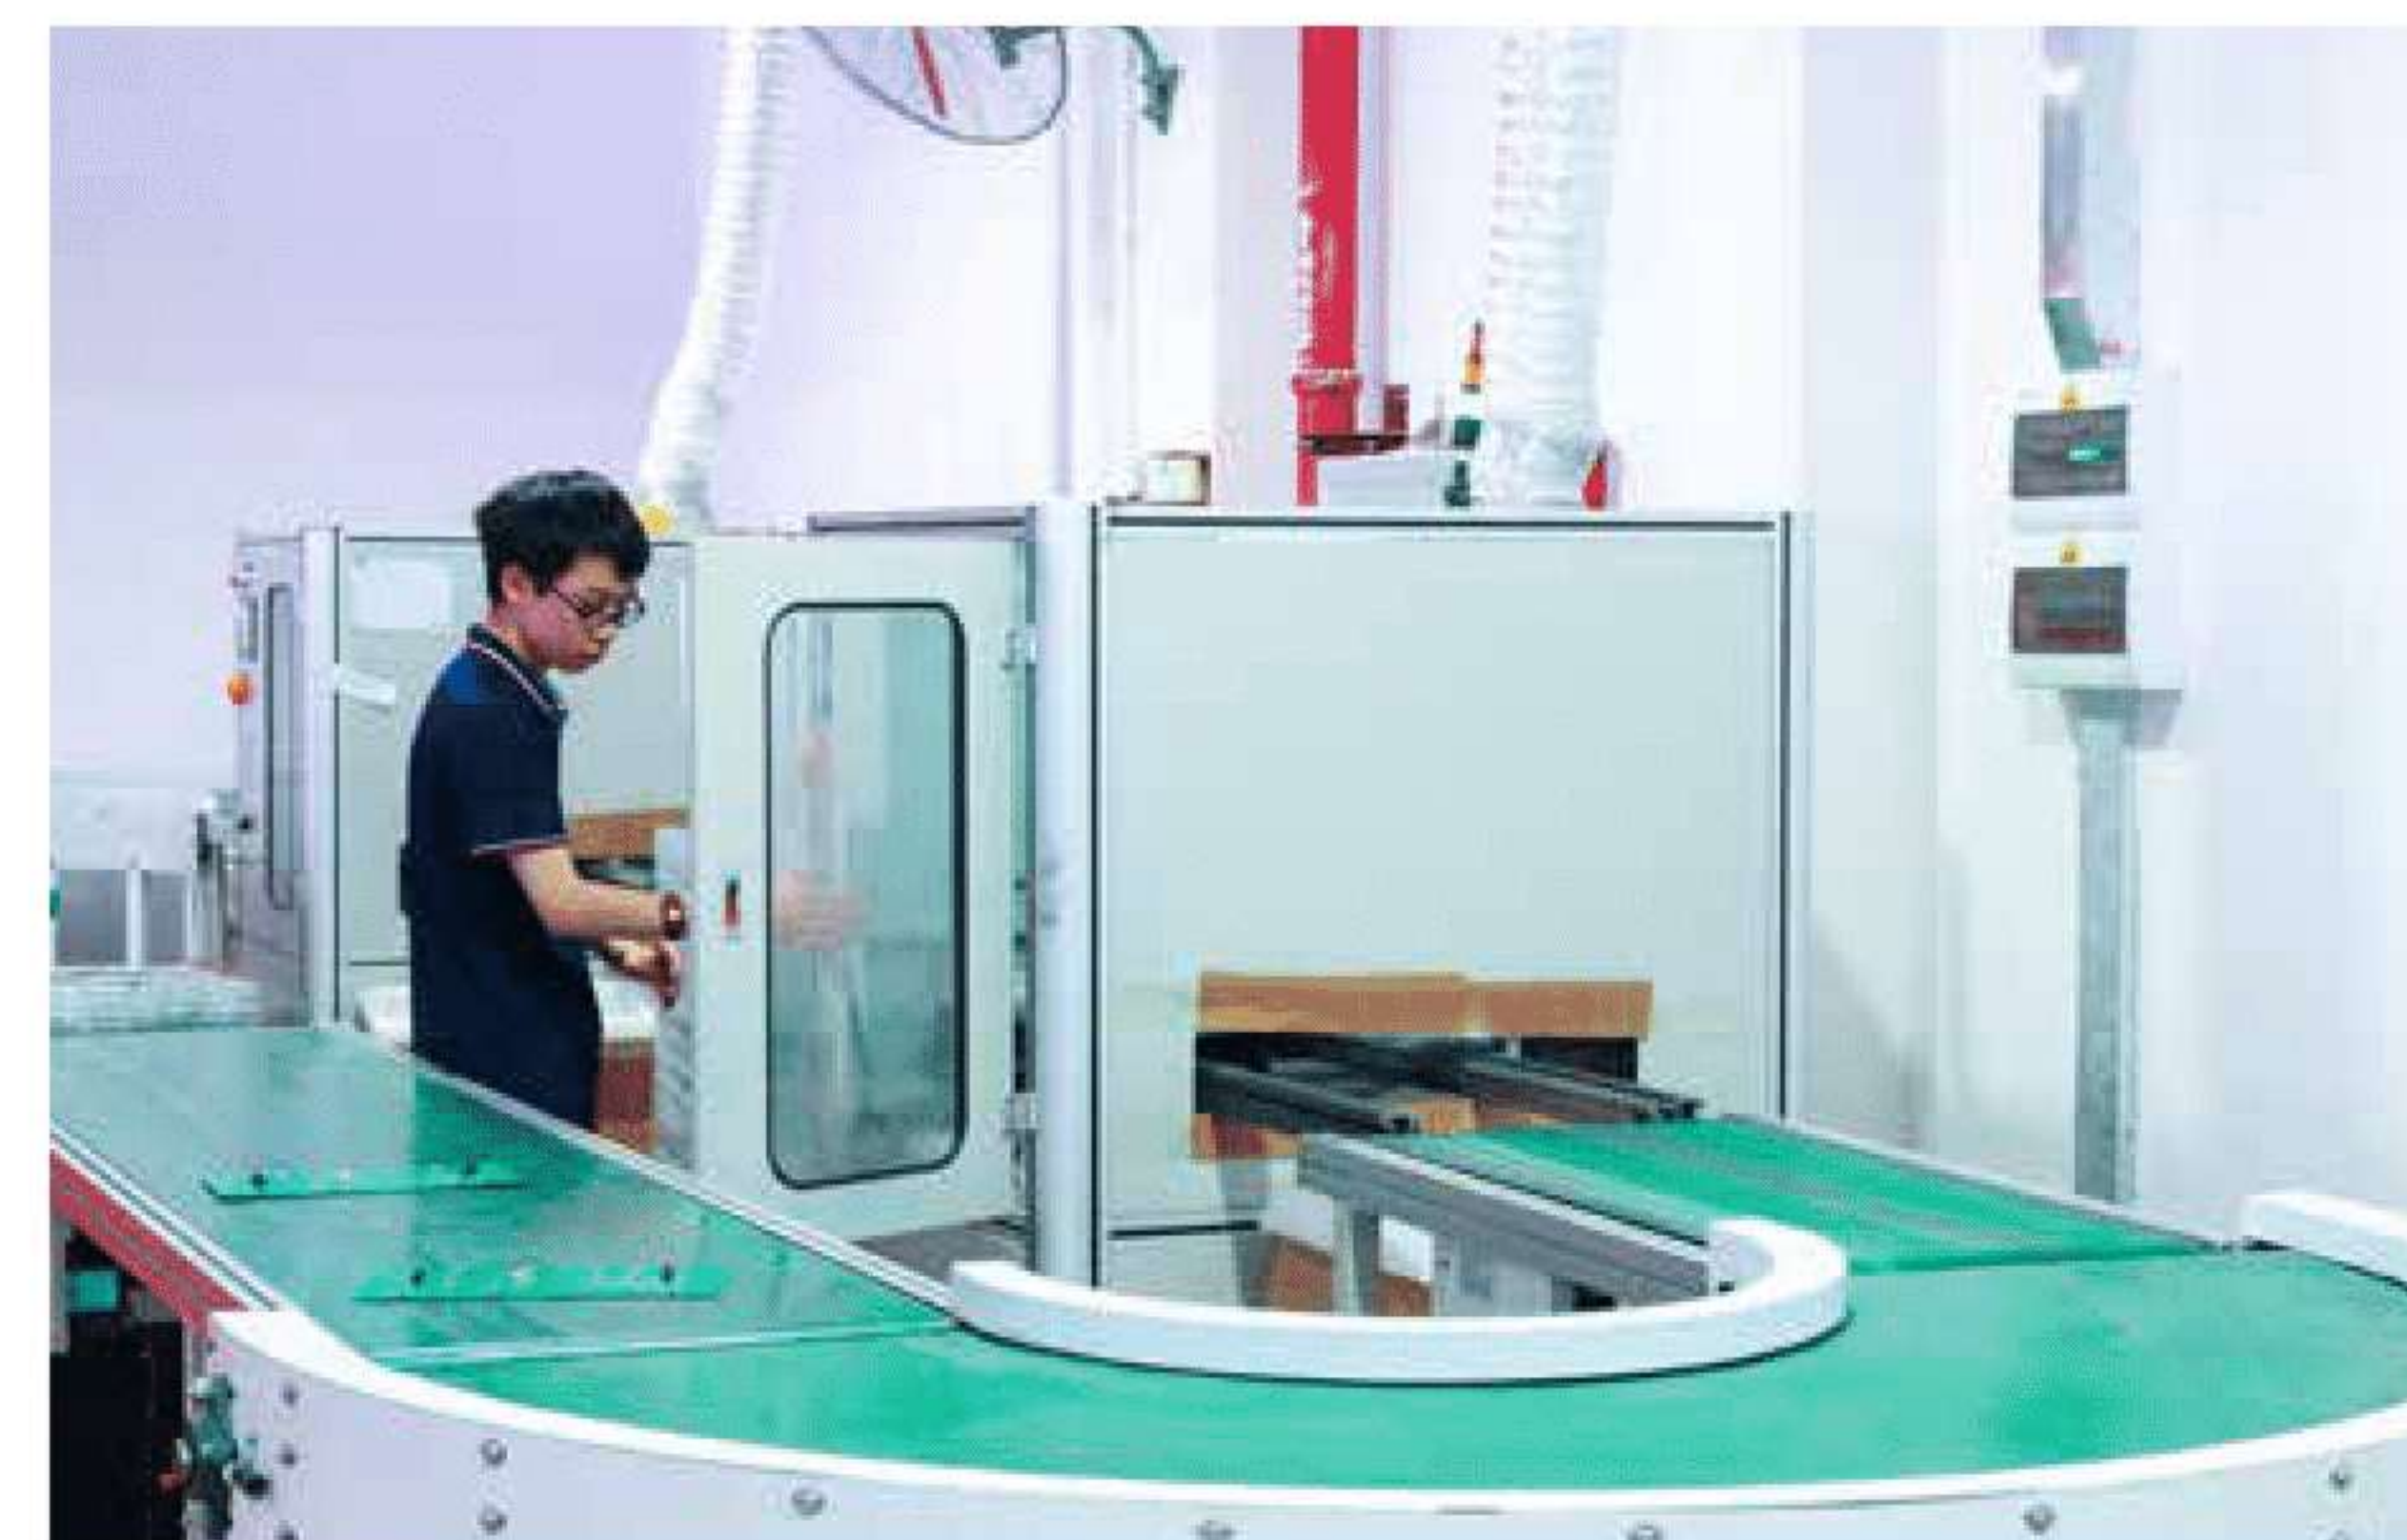


PRODUCTION PROCESS DIAGRAM

生产工艺示意图

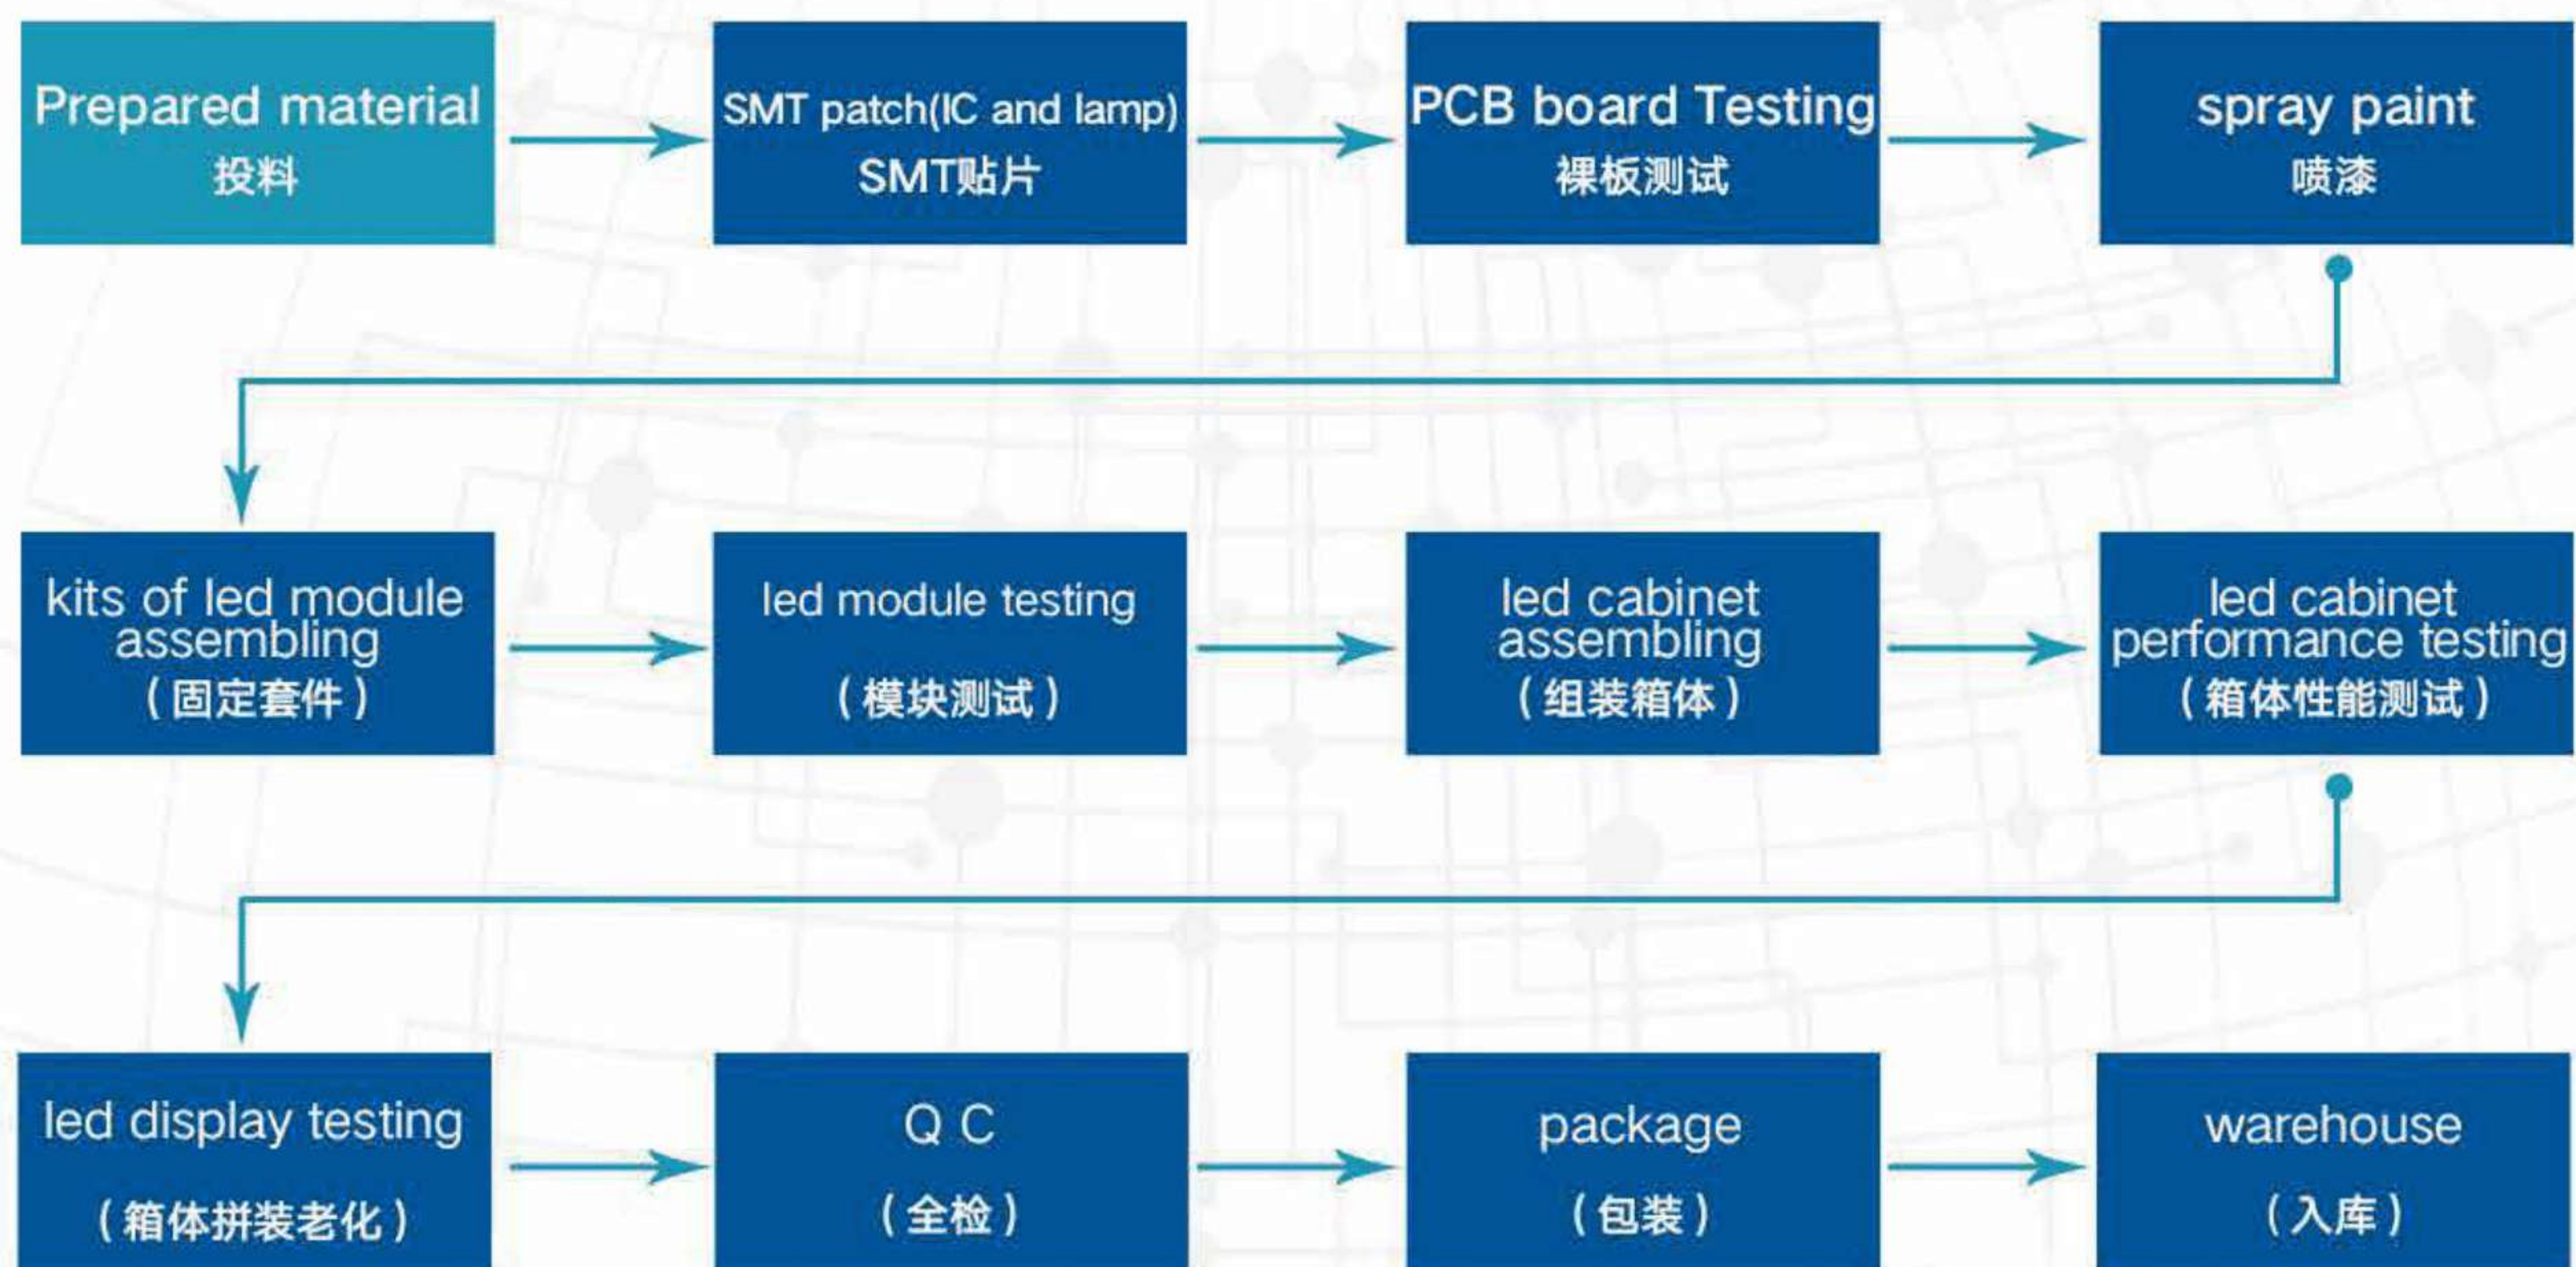

LED SCREEN CONNECTION DIAGRAM

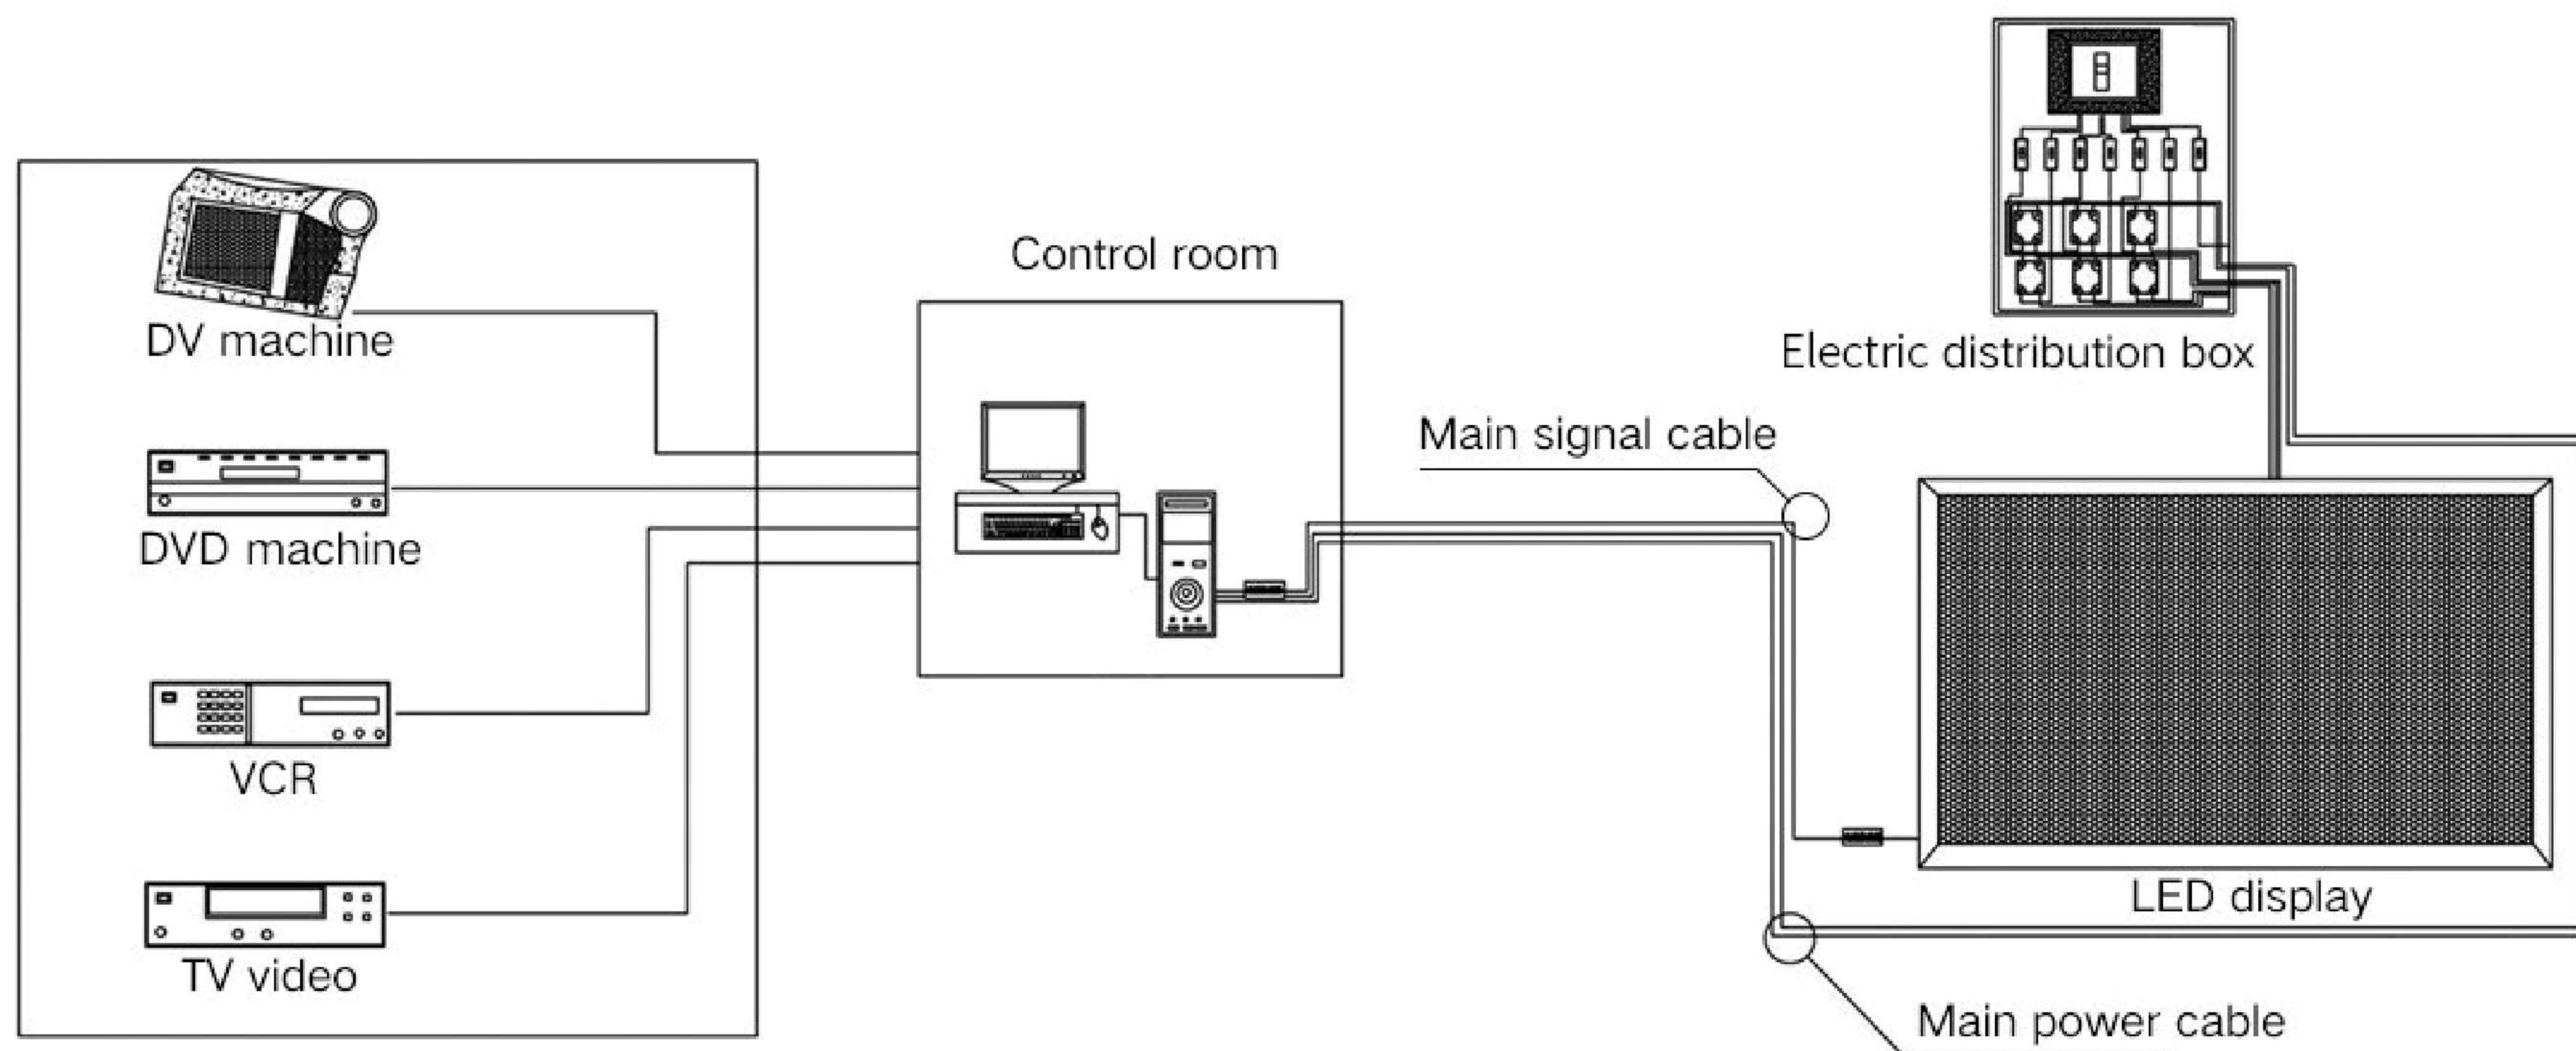

EXHIBITION SHOW

GET SHOW、PROLIGHT+SOUND、ISE、INFOCOMM、LDI



CHARMING GROUP



集团总部
Headquarters building



广东科而美光电有限公司
Charming Co, Ltd



广州创美电子有限公司
Guangzhou Charming
Lighting Co.,Ltd



美国公司
C&E Tech Usa Inc



MADRIX · 中国
Madrix China

THREE DIFFERENT PACKAGE



Standard Carton Case



Standard Wooden Case



Standard Flight Case

CREATE A MORE BEAUTIFUL VISUAL FEAST FOR THE WORLD



CHARMING CO.LTD

Address: Guangdong Foshan - Nanhai Charming Headquarters

WWW.CHARMINGLED.NET



FORTIS TECH CO.LTD

Address: A-01, Gomes Industrial Estate, Andheri East, Mumbai

WWW.FORTISTECH.IN

